



Serial Line Matrix Printer

Illustrated Parts Catalog





Contents

Chapter 1	General Information	Page 2
Chapter 2	Recommended Spare Parts List	Page 3
Chapter 3	Basic Printer Exploded Views	Page 7
Chapter 4	Miscellaneous Kit Spare Parts Lists	Page 32

Tables

Table 0	Recommended Spare Parts List	Page 3
Table 1	Cover Assembly I	Page 9
Table 2	Cover Assembly II	Page 11
Table 3	Basic Assembly I	Page 13
Table 4	Basic Assembly II	Page 15
Table 5	Basic Assembly III	Page 17
Table 6	Mechanical Assembly I	Page 19
Table 7	Mechanical Assembly II	Page 23
Table 8	Mechanical Assembly III	Page 27
Table 9	Lower Tractor Assembly	Page 29
Table 10	Upper Tractor Assembly	Page 31
Table 11	Miscellaneous Kits	Page 32

Illustrations

Figure 1	Cover Assembly I	Page 8
Figure 2	Cover Assembly II	Page 10
Figure 3	Basic Assembly I	Page 12
Figure 4	Basic Assembly II	Page 14
Figure 5	Basic Assembly III	Page 16
Figure 6	Mechanical Assembly I	Page 18
Figure 7	Mechanical Assembly II	Page 22
Figure 8	Mechanical Assembly III	Page 26
Figure 9	Lower Tractor Assembly	Page 28
Figure 10	Upper Tractor Assembly	Page 30

PTX809 Illustrated Parts Catalogue

First edition: September 2017

Chapter 1 General Information

This Illustrated Parts Catalogue lists replaceable parts and subassemblies in a form intended to help their identification.

A recommended spare parts list is shown in "Recommended Spare Parts List" on page 3, while the detail of parts referred to their mounting position over the printer, is shown in "Basic Printer Exploded Views" on page 7.

When a part number is written with remark (Misc. Kit Item xx), please refer to "Assembly 9: Miscellaneous Kits Spare Part Lists and Line Cords" on page xxx for the composition of these miscellaneous Kits.

When a part number includes more than one item of the table, see the NOTE below on the same page.

Where N.P. is written , this part is not procurable.

However, Printronix cannot assume responsibility for any errors that may appear in this document or their consequences

Chapter 2 Recommended Spare Parts List

Table 0: Recommended Spare Parts List for Basic Printer

SPARE PARTS DESCRIPTION	PART NUMBER	PART LIST REFERENCE	
		ASSEMBLY	INDEX
UPPER (REM.) TRACTOR ASSY	260056-001	1	10
KIT MECHANICAL PARTS I	260060-001	N.A.	N.A.
KIT MECHANICAL PARTS II	260060-002	N.A.	N.A.
KIT PLASTIC PARTS	260060-003	N.A.	N.A.
KIT METRIC-THREAD SCREWS	260060-004	N.A.	N.A.
KIT SELF-TAPPING SCREWS	260060-005	N.A.	N.A.
KIT WASHER & SEEGER	260060-006	N.A.	N.A.
MAIN SHAFT	260060-007	7	66
REAR BAR KIT	260060-008	7	63
LOWER MYLAR ASSY	260060-009	6	149
KIT OILFELT	260060-010	7	201
SUPPORT SPRING ASSY	260060-011	6	7
CODESTRIP ASSY	260060-012	6	138
MAGNET INTERLOCK	260060-013	2	26-A
PLATEN BELT TOOTHED	260060-014	6	29
PAPER BELT TOOTHED	260060-015	6	81
ALTERNANCE CABLE	260060-016	5	114

Table 0. Recommended Spare Parts List for Basic Printer

SPARE PARTS DESCRIPTION	PART NUMBER	PART LIST REFERENCE	
		ASSEMBLY	INDEX
PULLEY	260060-017	6	41
FRONT PULLEY	260060-018	6	10
AGA GEAR	260060-019	8	84
AGA SECTOR	260060-020	7	82
MOVABLE GEAR	260060-021	7	97
IDLE GEAR	260060-022	6	45
IDLE	260060-023	6	48
AGA INDICATOR GROUP	260060-024	8	109
FAN SUPPORT	260060-025	4	63
PRINTING POSITION MYLAR	260060-026	3	188
WEAR RESISTANT SPRING	260060-027	7	144
PIVOT ASSY	260060-028	8	103
UPPER FEEDER ASSY	260060-029	6	90
ENC99 CABLE	260060-030	7	59B
PRINT HEAD MASK	260060-031	7	35
PROT. MYLAR FOR PH CABLE	260060-032	5	196
PLATEN ASSY	260060-033	6	28
CARRIAGE ASSY (w. MASK)	260060-034	7	59
KIT PULLEY ASSY	260060-035	7	73 / 74
CARRIAGE BELT	260060-036	7	60
PRINT HEAD CABLE 24	260060-037	5	181
BAIL ASSY	260060-038	6	101

Table 0. Recommended Spare Parts List for Basic Printer

SPARE PARTS DESCRIPTION	PART NUMBER	PART LIST REFERENCE	
		ASSEMBLY	INDEX
PULLEY BRACKET ASSY	260060-039	7	70 / 72 /117
CARTRIDGE SUPPORT RIGHT	260060-040	8	108
LEFT CARTRIDGE SUPPORT	260060-041	8	102
ENGINE BOARD	260060-042	4	25
PAPER MOTOR ASSY	260060-043	6	43
CARRIAGE MOTOR ASSY	260060-044	7	79
LOWER (FIX.) TRACTOR ASSY	260060-045	1	25
SENSOR CABLE ASSY	260060-046	5	19
OPERATOR PANEL ASSY	260060-047	1	11
COLOR MOTOR ASSY KIT	260060-048	5	297
2EN99 PWA	260060-049	7	59A
RIBBON MOTOR ASSY	260060-050	8	105
AGA MOTOR ASSY	260060-051	8	86
POWER SUPPLY UNIVERSAL (110-240)	260060-052	4	24
OPERATOR PANEL CABLE	260060-053	1	182
ASF COVER BLACK	260060-054	2	7
REAR TRACTOR COVER BLACK	260060-055	2	8
DEFLECTOR BLACK	260060-056	2	69
RIGHT GEAR COVER BLACK	260060-057	2	38
LEFT GEAR COVER BLACK	260060-058	2	6
REAR COVER BLACK	260060-059	2	3
HAND GRIP BLACK	260060-060	1	4

Table 0. Recommended Spare Parts List for Basic Printer

SPARE PARTS DESCRIPTION	PART NUMBER	PART LIST REFERENCE	
		ASSEMBLY	INDEX
TOP COVER ASSY BLACK	260060-061	2	26
FRONT CABINET BLACK	260060-062	2	2
PRINT HEAD ER24 C+	260060-063	5	60
2A9CBP BOARD	260060-064	4	110
CARRIAGE FAN ASSY	260060-065	4	65
PWA GX2INT	260060-066	2	75
PTXS809 O.P. MEMBRANE	260060-067	1	12
CONTROLLER ASSY (LAN/PAR/SER/USB)	260060-068	4	115
FAN ASSY	260060-088	4	64
TRACTOR PAPER LEFT 6 PIN	260060-089	9 / 10	11
TRACTOR PAPER RIGTH 6 PIN	260060-090	9 / 10	12

Chapter 3 Basic Printer Exploded Views

Figure 1 : COVER ASSEMBLY I

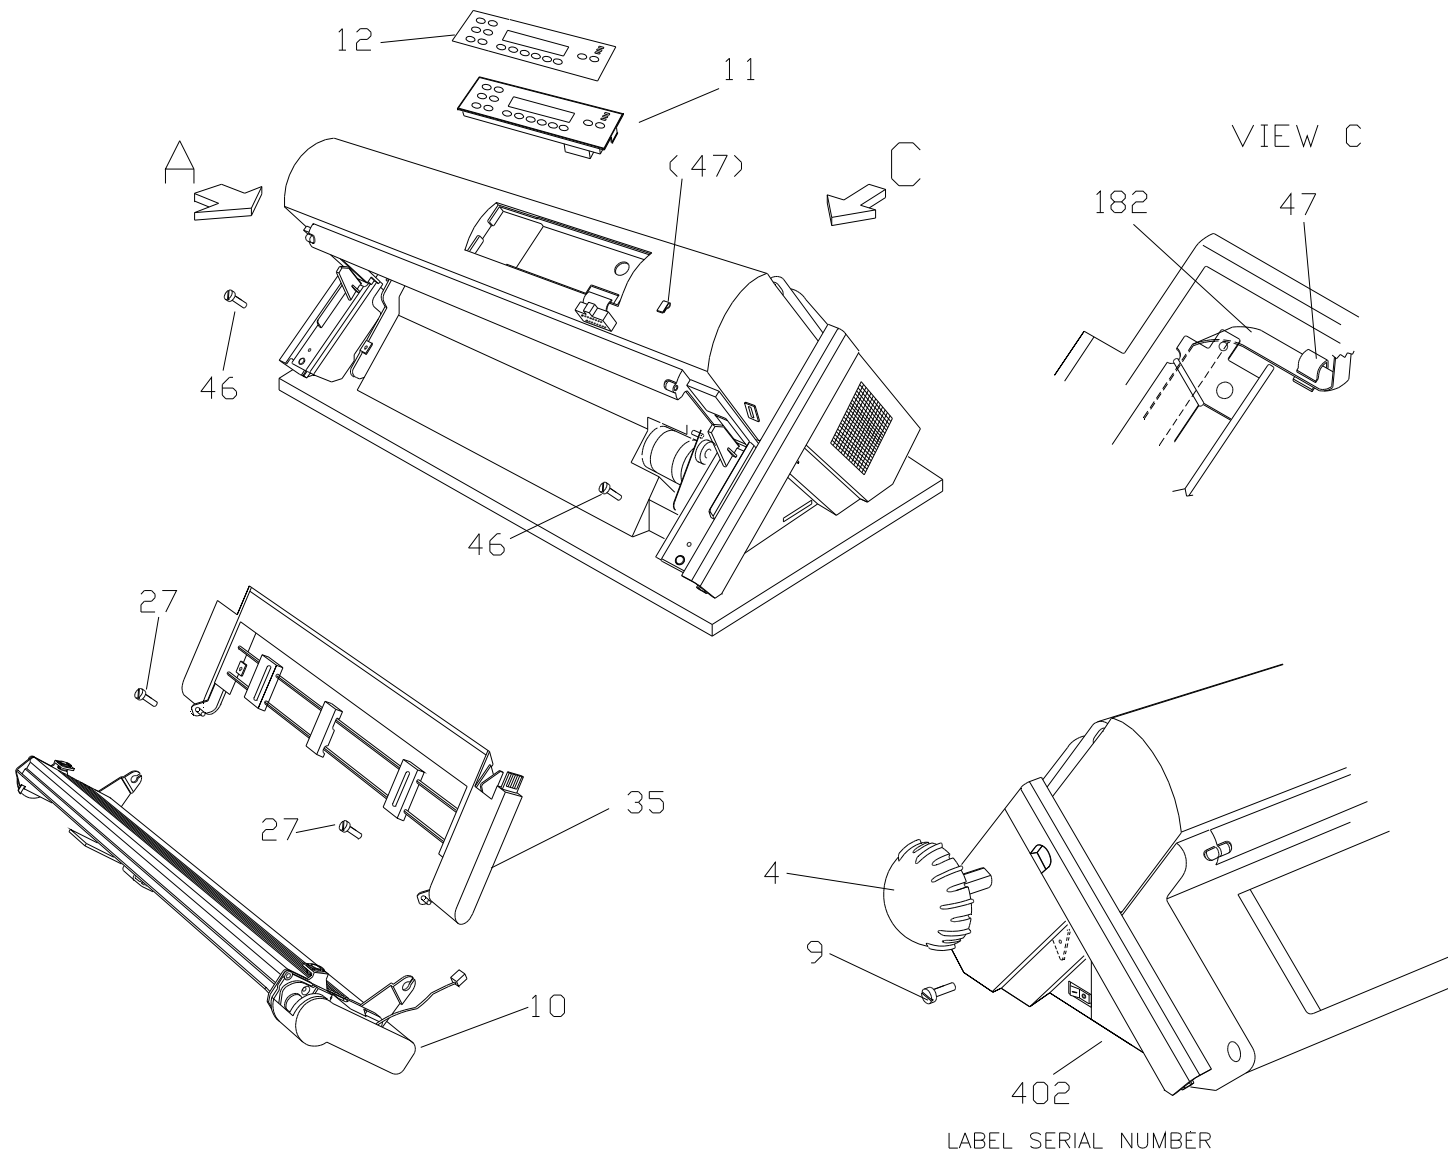


Table 1 : COVER ASSEMBLY I

Asm-Index	Part Number	Units	Description
-4	260060-060	1	Hand grip black
-9	260060-005	2	Screw 3.9x16 (misc. Kit Item 17)
-10	260060-056	1	Upper Tractor Assembly 6 pin (Optional)
-11	260060-047	1	Operator Panel Assembly (9 keys, no membrane)
-12	260060-067	1	PTXS809 O.P. Membrane
-27	260060-004		Screw M3x8 (misc. Kit Item .15)
-35	260060-045	1	Lower Tractor Assembly 6 pin
-46	260060-005	2	Screw T.C.I.C 3.9x25 (misc. Kit Item 18)
-47	N.P.	1	Clamp for Cable
-182	260060-053	1	Operator Panel Cable

Notes:

Figure 2 : COVER ASSEMBLY II

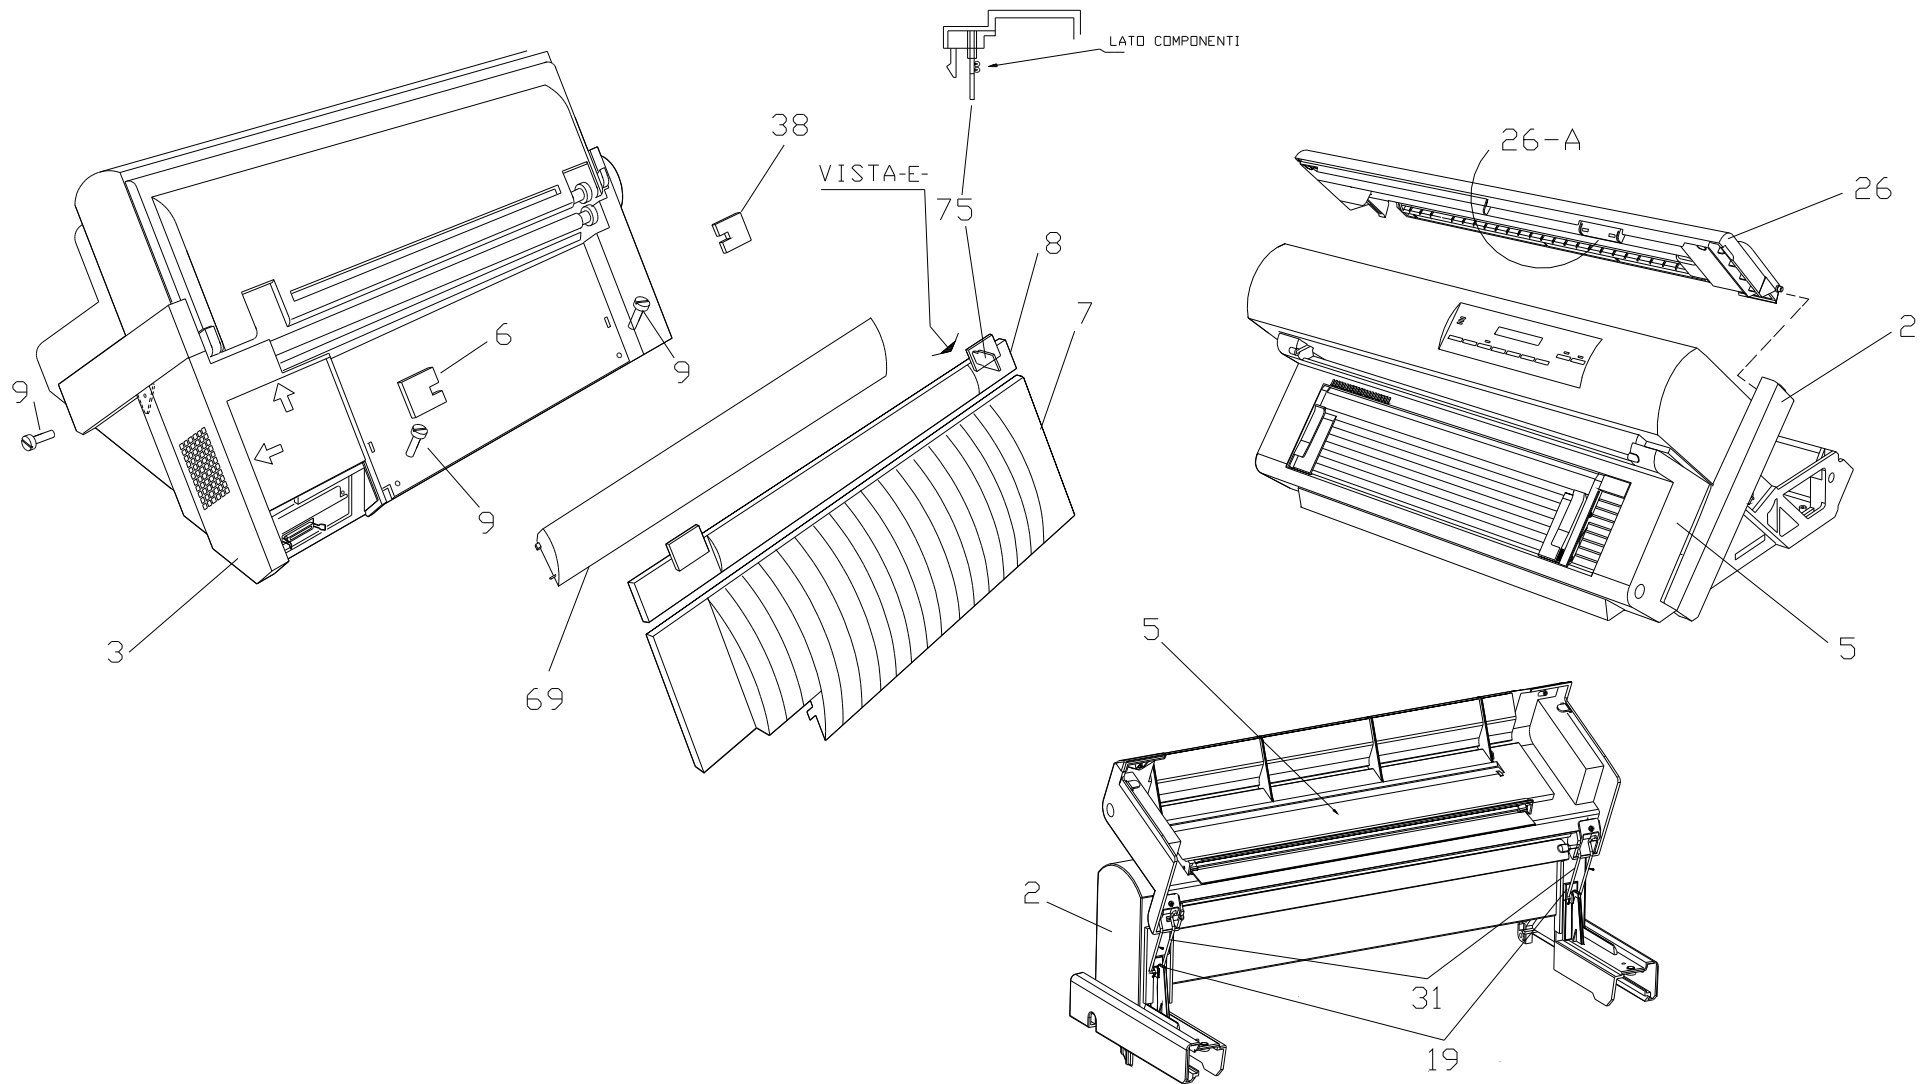


Table 2 : COVER ASSEMBLY II

Asm-Index	Part Number	Units	Description
-2	260060-062	1	Main Cover Group
-3	260060-059	1	Rear Cover Group
-5	260060-062	1	Front Cover Group
-6	260060-058	1	Gear Cover Left
-7	260060-054	1	ASF Cover Group
-8	260060-055	1	Rear Tractor Cover
-9	260060-005	4	Screw 3.9x13
			(misc. Kit Item 17)
-19	260060-062	2	Bracket
-26	260060-061	1	Top Cover Group
-26A	260060-013	1	Magnet Interlock
-26B	N.P.	2	Magnet Circuit
-31	260060-062	2	Slide
-38	260060-057	1	Gear Cover Right
-69	260060-056	1	Rear Deflector
-75	260060-066	1	PWA GX2INT Board

Notes:

- 1) The Front Cover Assy is composed by the item 2, 5, 19, 31 assembled together.
- 2) The Top Cover Assy is composed by the item 26, 26A and 26B assembled together.

Figure 3 : BASIC ASSEMBLY I

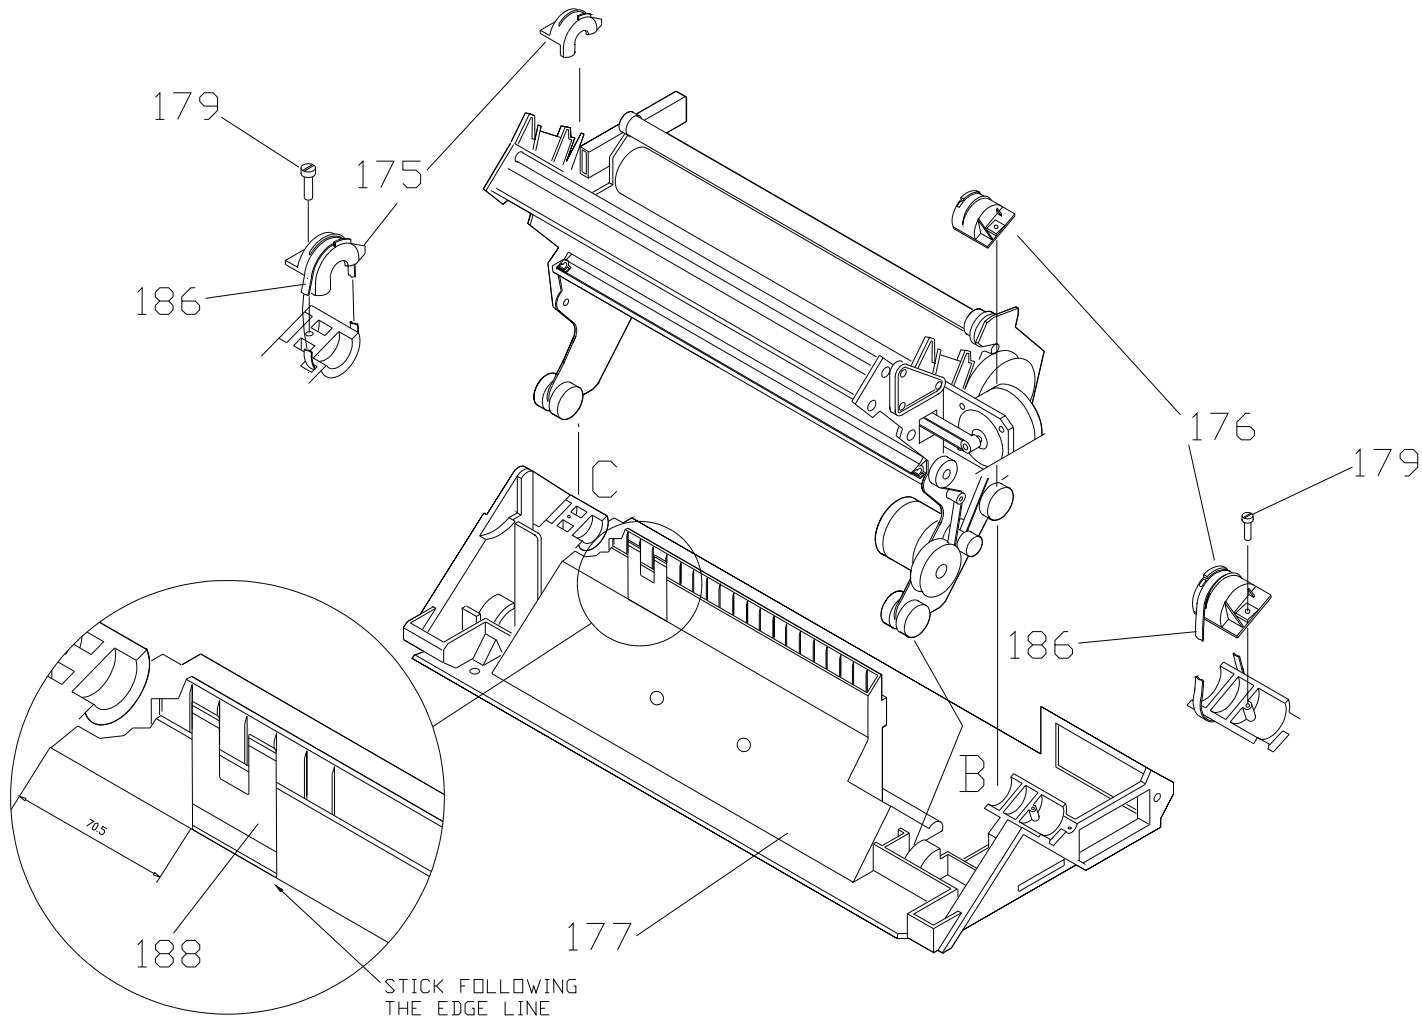


Table 3: BASIC ASSEMBLY I

Asm-Index	Part Number	Units	Description
-175	260060-001	1	Mechanical Block (misc. Kit Item 1)
-176	260060-001	1	Mechanical Block 1 (misc. Kit Item 2)
-177	N.P.	1	Base Assembly
-179	260060-005	2	Screw 3.9x16 (misc. Kit Item 17)
-186	260060-003	2	Fastener Loop Self-Lock (misc. Kit Item 12)
-188	260060-026	1	Paper Position Mylar

Figure 4 : BASIC ASSEMBLY II

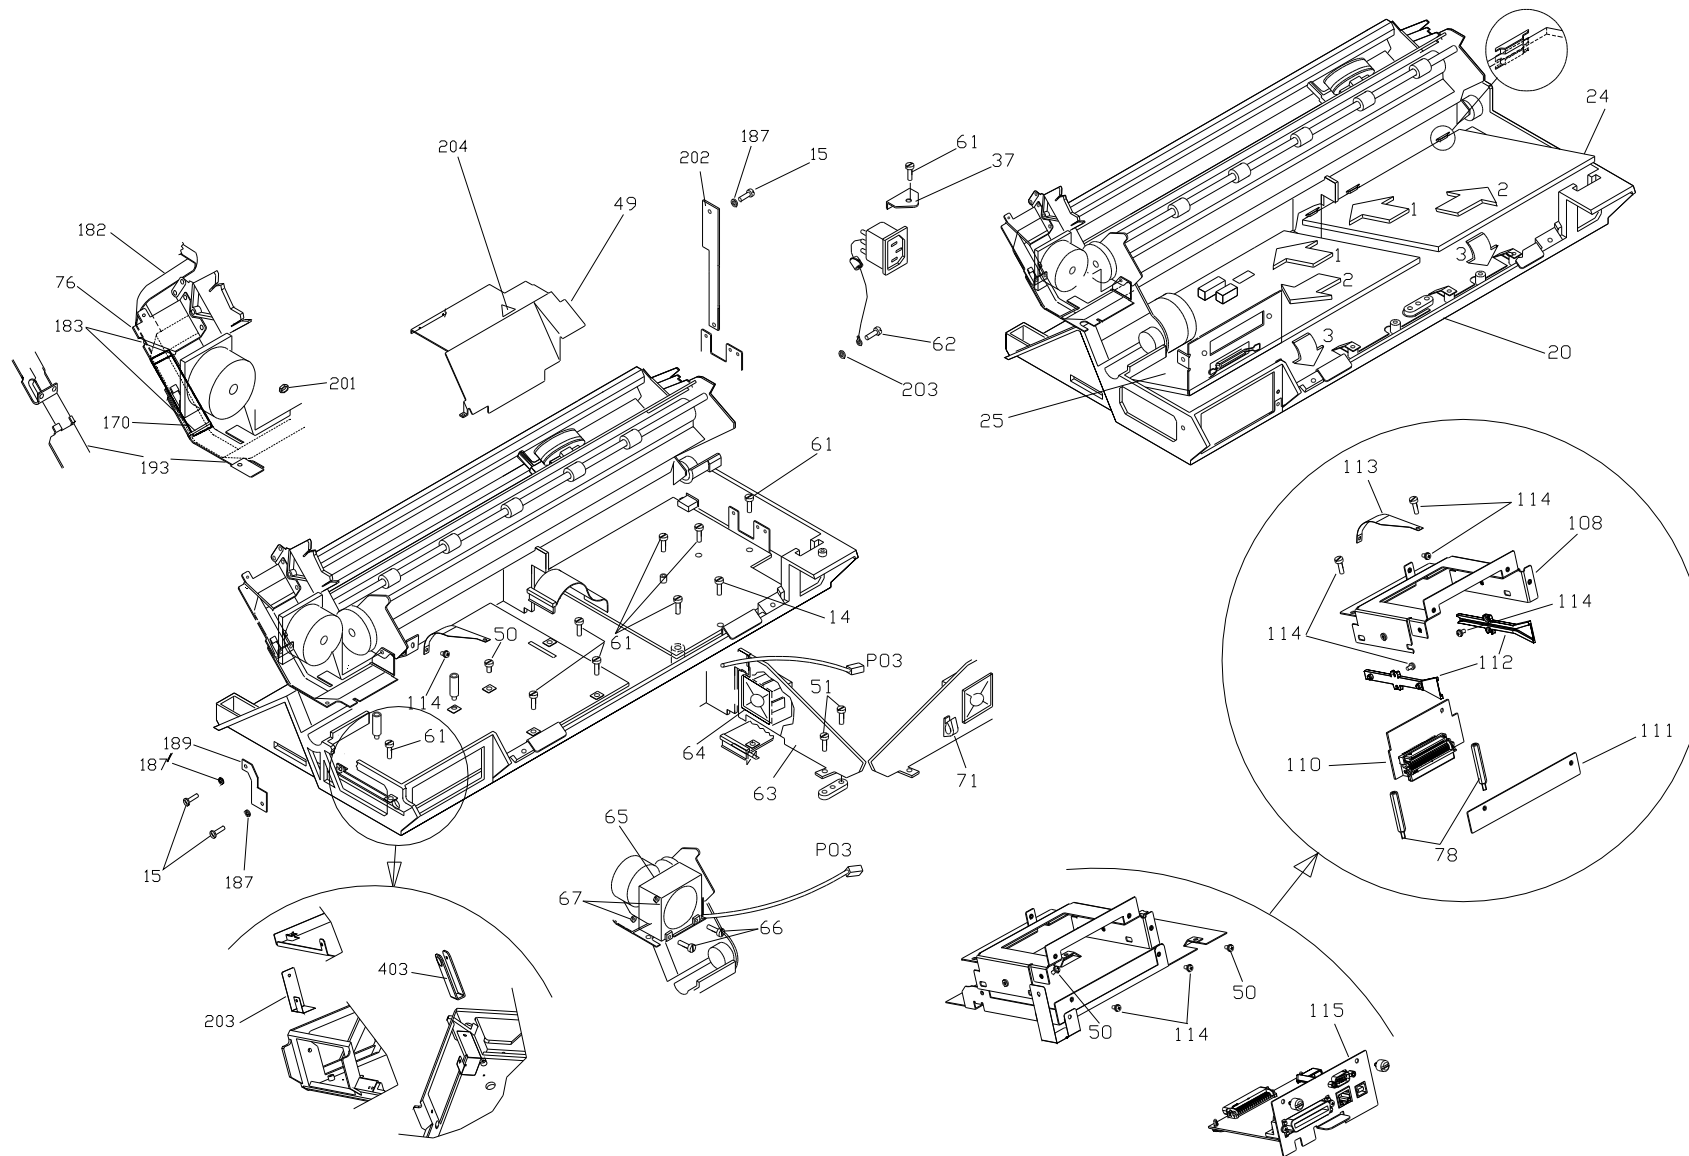


Table 4 : BASIC ASSEMBLY II

Asm-Index	Part Number	Units	Description	Asm-Index	Part Number	Units	Description
4-14	260060-004	1	Screw M3x6 (misc. Kit Item 1)	-76	N.P.	1	Carriage Motor Support
-15	260060-004	2	Screw M3x4 (misc. Kit item 3)	-78	N.P.	2	Support
-20	N.P.	1	Base Assembly	-108	N.P.	1	Slot Assembly (note 1)
-24	260060-052	1	Power Supply 120-240V	-110	260060-064	1	Back Panel Board
-25	260060-042	1	Engine Board	-113	N.P.	1	Ground Strip
-37	N.P.	1	Inlet	-114	260060-004	6	Screw M3x6 (misc. Kit Item 13)
-49	N.P.	1	Power Supply Cover	-115	260060-068	1	Controller LAN, Par,Ser, USB2.0 (note 2)
-50	260060-004	5	Screw M3x8 (misc. Kit Item 5)	-170	N.P.	1	Protection Mylar
-51	260060-005	2	Screw 2.2x9.5 (misc. Kit Item 8)	-182	260060-053	1	O.P. Cable
-61	260060-005	10	Screw 2.9x9.5 (misc. Kit Item 13)	-183	260060-003	2	Fastener Loop Self-Lock (misc. Kit Item 13)
-62	260060-004	1	Screw M4x6 (misc. Kit item 11)	-187	260060-006	3	Washer Split D 3.2 (misc. Kit Item 26)
-63	260060-025	1	Fan Support	-189	N.P.	1	Ground Strip
64	260060-088	1	Fan Assembly	-193	N.P.	1	Bracket group
-65	260060-065	1	Carriage Fan Assembly	-201	260060-006	1	Nut M3 (misc. Kit Item 17)
-66	260060-004	2	Screw M3x30 (misc. Kit Item 21)	-202	N.P.	1	Ground Strip
-67	260060-006	2	Nut M3 (misc. Kit item 17)	-203	N.P.	1	Ground Strip
-71	260060-002	1	Cable Clamp (misc. Kit Item 12)	-204	N.P.	1	Warning Label
				-403	N.P.	1	Grounding plate

Notes:

1. The Interface Slot Assy is composed by the item 108, 112 assembled together.

Figure 5 : BASIC ASSEMBLY III

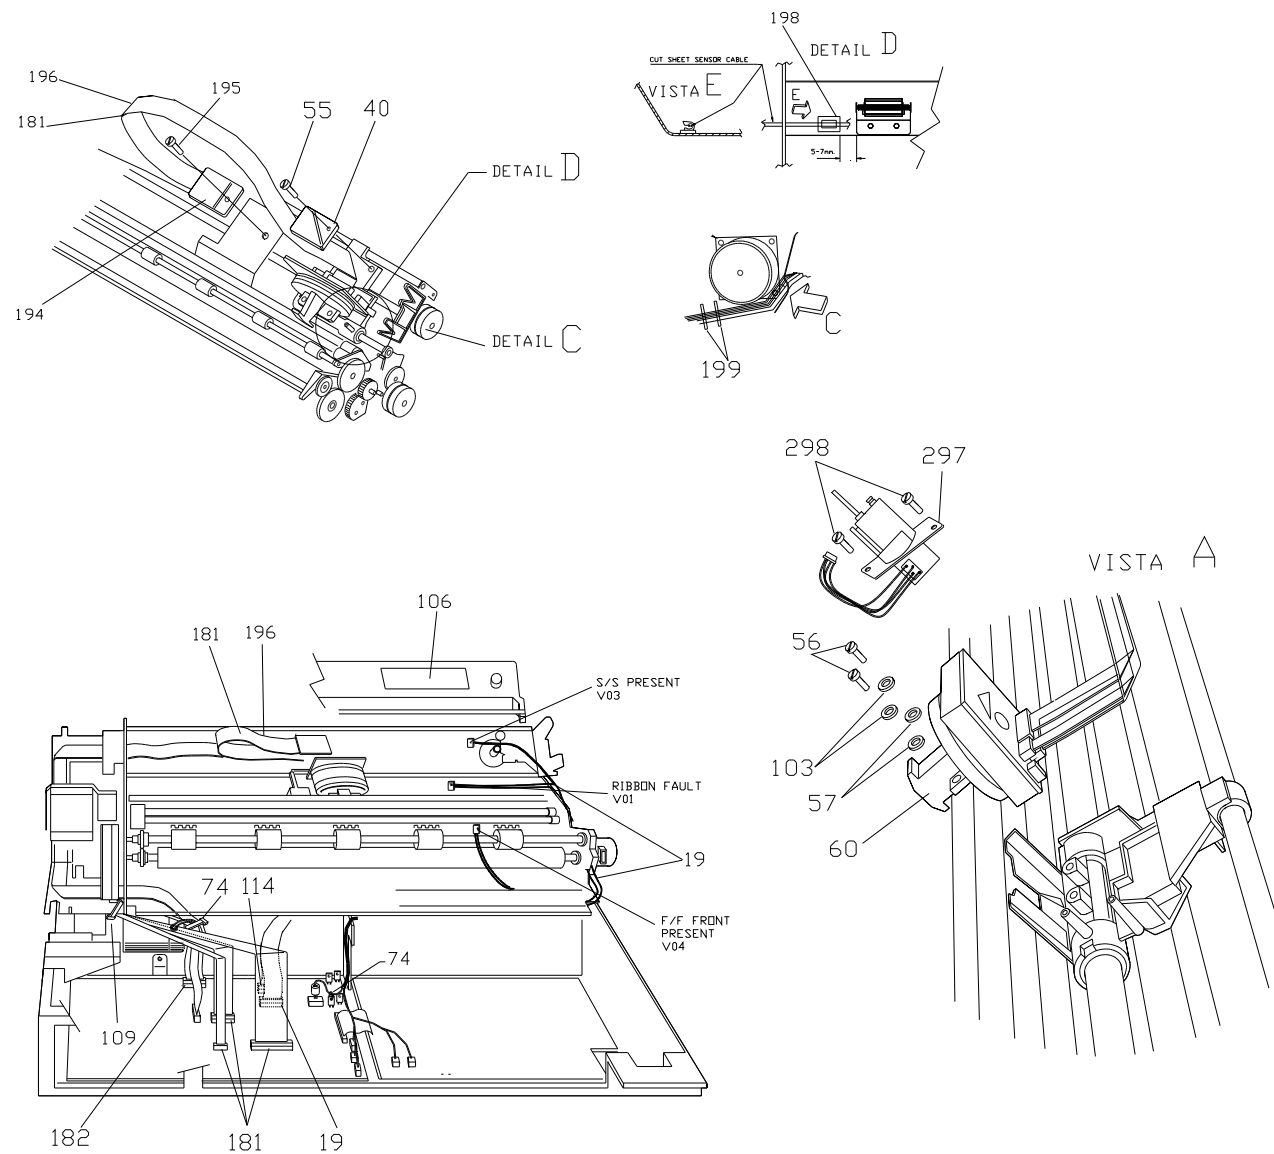


Table 5 : BASIC ASSEMBLY III

Asm-Index	Part Number	Units	Description	Asm-Index	Part Number	Units	Description
5-19	260060-046	1	Sensors Cable Assembly	-114	260060-016	1	Alternance Cable
-40	N.P.	1	P.H. Bracket	-181	260060-037	1	P.H. Cable 24 (3 cables)
-55	260060-004	1	Screw M4x8 (misc. Kit Item 10)	-182	260060-053	1	O.P. Cable
-56	260060-004	2	Screw M4x14 (misc. Kit Item 2)	-194	N.P.	1	Frame Bracket
-57	260060-006	2	Washer (misc. Kit Item 8)	-195	260060-004	2	Screw M4x6 Flat Head (misc. Kit Item 23)
-60	260060-063	1	Print Head ER24 C+	-196	260060-032	1	Protection Mylar for PH Cable
-74	260060-003	2	Fastener Loop Self-Lock (misc. Kit Item 13)	-198	260060-002	1	Cable Clamp (misc. Kit Item 13)
-103	260060-006	2	Washer Internal Teeth (misc. Kit Item 25)	-199	N.P.	2	Fastener Loop-Self-Lock
-106	260059-001	1	Ribbon Cartridge (1 PK)	-297	260060-048	2	Color Motor Assy (ses note 2)
-106	260059-002	6	Ribbon Cartridge (6 PK)	-298	260060-048	1	Screw M3x8 (see note 2)
-109	260060-003	1	(note 2) Fastener Loop Self-Lock (misc. Kit Item 16)				

Notes:

1. The Ribbon Cartridge is a Consumable part.
2. The Color Motor Assy kit is composed by the item 297, 298 and an installation sheet.

Exploded view diagram of a mechanical assembly, likely a linear motion system. The diagram shows various components and sub-assemblies labeled with numbers and letters:

- Sub-assemblies:** V01, V03, V04, and -J-.
- Parts:** 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116.
- DETAIL -J-:** A circular inset showing a cross-section of a component with parts 28, 3, 31, and 116.

Table 6 : MECHANICAL ASSEMBLY I

Asm-Index	Part Number	Units	Description
6-2	N.P.	1	Right Frame
-3	N.P.	1	Left Frame
-4	N.P.	1	Base Frame
-5	N.P.	1	Guide Assembly
-6	N.P.	1	Lower Feeder Assembly (note 1)
-7	260060-011	1	Support Spring Assembly
-8	260060-001	2	Bush (misc. Kit Item 8)
-9	260060-006	3	Ring Benzing D. 7 (misc. Kit Item 6)
-10	260060-018	1	Front Pulley
-13	260060-005	9	Screw 3.5x13 (misc. Kit Item 1)
-14	260060-004	1	Screw M3x6 (misc. Kit Item 1)
-15	260060-004	6	Screw M3x4 (misc. Kit Item 3)
-18	260060-005	1	Ring Ret. D.8 (misc. Kit Item 7)
-22	260060-001	1	Spacer (misc. Kit Item 3)
-23	260060-005	1	Screw 2.2x13 (misc. Kit Item 5)
-24	260060-002	1	Sensor Plate (misc. Kit Item 5)
-25	260060-004	1	Screw M2x8 (misc. Kit Item 4)

Asm-Index	Part Number	Units	Description
-19	260060-046	1	Sensor Cable Assy
-28	260060-033	1	Platen Assembly
-29	260060-014	1	Platen Belt Toothed
-30	260060-002	2	Bearing Retainer (misc. Kit Item 5)
-31	260060-001	1	Bearing (misc. Kit Item 10)
-41	260060-017	1	Pulley
-42	260060-004	2	Screw M3x8 (misc. Kit Item 7)
-43	260060-043	1	Paper Motor Assembly
-44	260060-004	2	Screw M3x10 (misc. Kit Item 8)
-45	260060-022	1	Idle Gear
-47	N.P.	1	Paper Feed Belt Tension Lever
-48	260060-023	1	Idle
-51	260060-004	1	Screw M4x6 (misc. Kit Item 9)
-53	N.P.	1	Front Frame
-54	N.P.	1	Home Sensor Support
-55	260060-002	4	Damper (Misc. Kit item 2)
-56	260060-002	4	Damper Spacer (Misc. Kit Item 7)
-57	260060-005	4	Screw 3.5x16 (Misc. Kit Item 7)
-58	260060-005	2	Screw 2.9x9.5 (Misc. Kit Item 8)

Table 6 : MECHANICAL ASSEMBLY I (continued)

Asm-Index	Part Number	Units	Description
-64	260060-006	1	Washer D3.2
	260060-015		(Misc. Kit Item 8)
-81	260060-004	1	Paper Belt Toothed
-87		3	Screw M3x6
	260060-029		(misc. Kit Item 13)
-90	260060-029	1	Upper Feeder Assembly
-93	260060-006	1	Double Gear
-94		1	Ring Benzing D.6
			(misc. Kit item 5)
-101	260060-038	1	Bail Assembly
-104	260060-006	1	Ring Benzing D.4
			(misc. Kit Item 3)
-116	260060-006	2	Thrust Washer
			(misc. Kit Item 11)
-119	260060-002	6	Vibrodamp
			(misc. Kit Item 1)
-122	260060-002	2	Cable Clamp
			(misc. Kit Item 11)
-133	260060-006	3	Washer D 3.2
			(Misc. Kit Item 20)

Asm-Index	Part Number	Units	Description
-138	260060-012	1	Codestrip Assy
-149	260060-009	1	Lower Mylar Assembly
-160	N.P.	1	Dual Tractor Gear
-168	N.P.	1	Bracket Pulley Pivot
-169	260060-005	1	Screw 3.5x19
			(misc. Kit Item 17)
-190	N.P.	1	Gear Protection
			(misc. Kit Item 3)
-198	260060-002	2	Cable Clamp
			(misc. Kit Item 13)
V01	N.P.	1	V01 Opto Interrupter
			(note 2)
V03	N.P.	1	V03 Opto Interrupter
			(note 2)
V04	N.P.	1	V04 Reflective Sensor
			(note 2)

Notes:

1. Lower Feeder Assembly (item 6) is for cut sheet and is non-functional in this regard. The purpose of the bar is to hold tension between the side frames.
2. Opto interrupters (V01 and V03) and Reflective Sensors (V04) are also included in the Sensors Cable Assembly.

This page is intentionally left blank

Figure 7 : MECHANICAL ASSEMBLY II

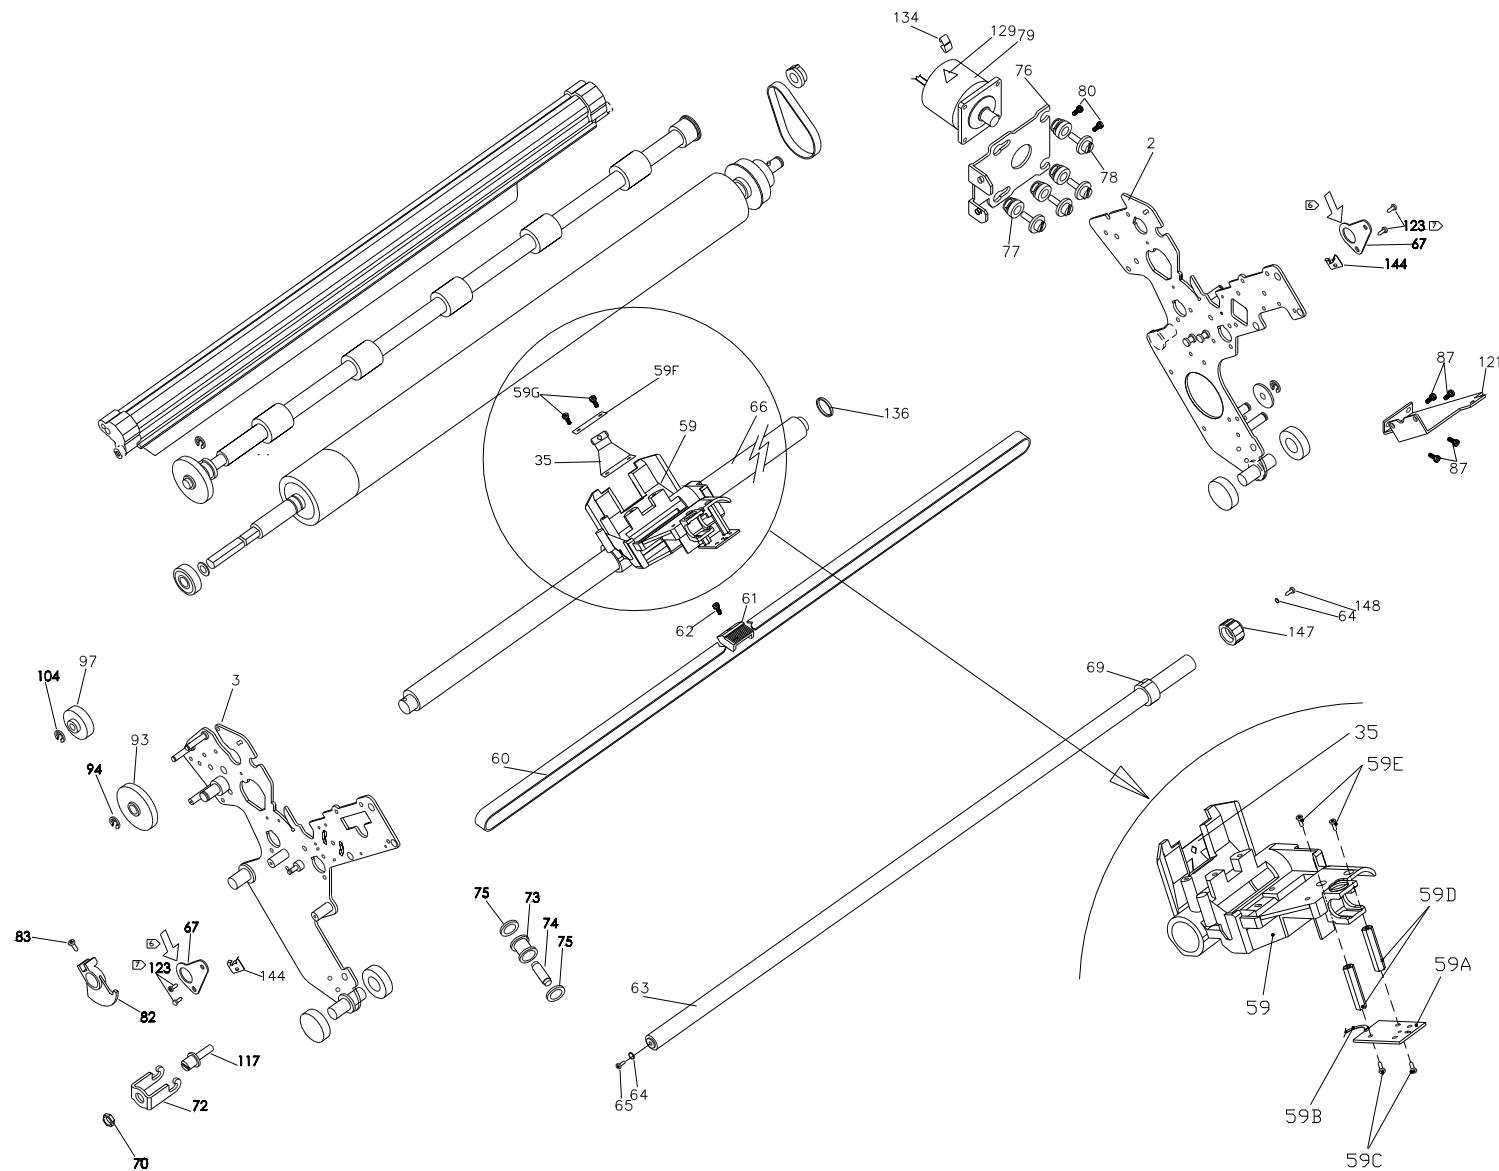


Table 7 : MECHANICAL ASSEMBLY II

Asm-Index	Part Number	Units	Description	Asm-Index	Part Number	Units	Description
7-2	N.P.	1	Right Frame	-65	260060-004	1	Screw M4x8
-3	N.P.	1	Left Frame				(misc. Kit Item 10)
-35	260060-031	1	Ribbon Mask	-66	260060-007	1	Main Shaft
			(Note 1)	-67	260060-002	2	Shaft Retainer
-59	260060-034	1	Carriage Assembly				(misc. Kit Item 8)
			(note 1)	-69	260060-001	1	Carriage Bush
-59A	260060-049	1	2EN99 Pwa				(Note 1 misc. Kit Item 13)
-59B	260060-030	1	Cable ENC99	-70	260060-039	1	Nut hexagonal M5
-59C	260060-004	2	Screw M3x8				(note 5 misc. Kit Item 18)
			(Misc. Kit item 7)	-72	260060-039	1	Loose Pulley Support
-59D	N.P.	2	Spacer Sensor				(note 5)
-59E	260060-004	2	Screw M3x8	-73	260060-035	1	Pulley Assembly
			(Misc. Kit item 15)				(note 4)
-59F	260060-034	1	Mask Plate	-74	260060-035	1	Pivot
			(note 1)				(note 4 misc. Kit Item 10)
-59G	260060-005	2	Screw M 2.5x4	-75	260060-003	2	Spacer
			(note 1 misc. Kit Item 11)				(misc. Kit Item 9)
-60	260060-036	1	Carriage Belt Toothed	-76	N.P.	1	Carriage Motor Support
-61	260060-003	1	Belt Bracket	-77	260060-002	4	Motor Damp
			(note 1 misc. Kit Item 6)				(misc. Kit Item 3)
-62	260060-005	1	Screw 2.9x13	-78	260060-002	4	Stud
			(note 1 misc. Kit Item 9)				(misc. Kit Item 9)
-63	260060-008	1	Rear Bar	-79	260060-044	1	Carriage Motor Assembly
			(note 2)	-80	260060-004	2	Screw M4x6
							(misc. Kit Item 11)

Table 7 : MECHANICAL ASSEMBLY II (continued)

Asm-Index	Part Number	Units	Description	Asm-Index	Part Number	Units	Description
-82	260060-020	1	AGA Sector	-134	N.P.	1	Finger Soft Grounding
-83	260060-004	1	AGA Stud	-136	N.P.	1	O-Ring
			(misc. Kit Item 22)	-144	260060-027	2	Wear Resistant Spring
-87	260060-004	4	Screw M3x6				(misc. Kit Item 12)
			(misc. Kit Item 13)	-147	260060-008	1	Eccentric Bushing
-93	260060-029	1	Double Gear				(note 2)
-94	260060-006	1	Ring D.6	-148	260060-008	1	Screw M4x12
			(misc. Kit Item 5)				(note 2)
-97	260060-021	1	Movable Gear	-201	260060-010	2	Olifelt
-104	260060-006	1	Ring Benzing D.4				(note 3)
			(misc. Kit Item 3)	-202	260060-034	2	Flange
-117	260060-039	1	Loose Pivot				(note 1)
			(note 5)				
-121	260060-002	1	Clamp 79				
			(misc. Kit item 15)				
-129	N.P.	1	Thermal Label				
-123	260060-004	4	Screw M3x4				
			(misc. Kit Item 16)				

Notes:

1. Carriage Assembly (item 59) includes item 59A though 59G. Also pre-assembled on the carriage, two bushing, two oiled felts (item 201), two flanges (item 202), the carriage bush (item 69), the belt bracket (item 61), the relative screw (item 62) and the Ribbon Mask (item 35).
2. Rear Bar Kit includes item 63, 147 and 148.
3. A set of # 2 pre-oiled oilfet i(item 201) s available as separate spare part
4. The pulley assembly item 73, the pivot item 74 and 2x washer item 75 are included in the same spare part.
5. The Pulley bracket assy is composed by the item 70. 72,117.

This page is intentionally left blank

Figure 8 : MECHANICAL ASSEMBLY III

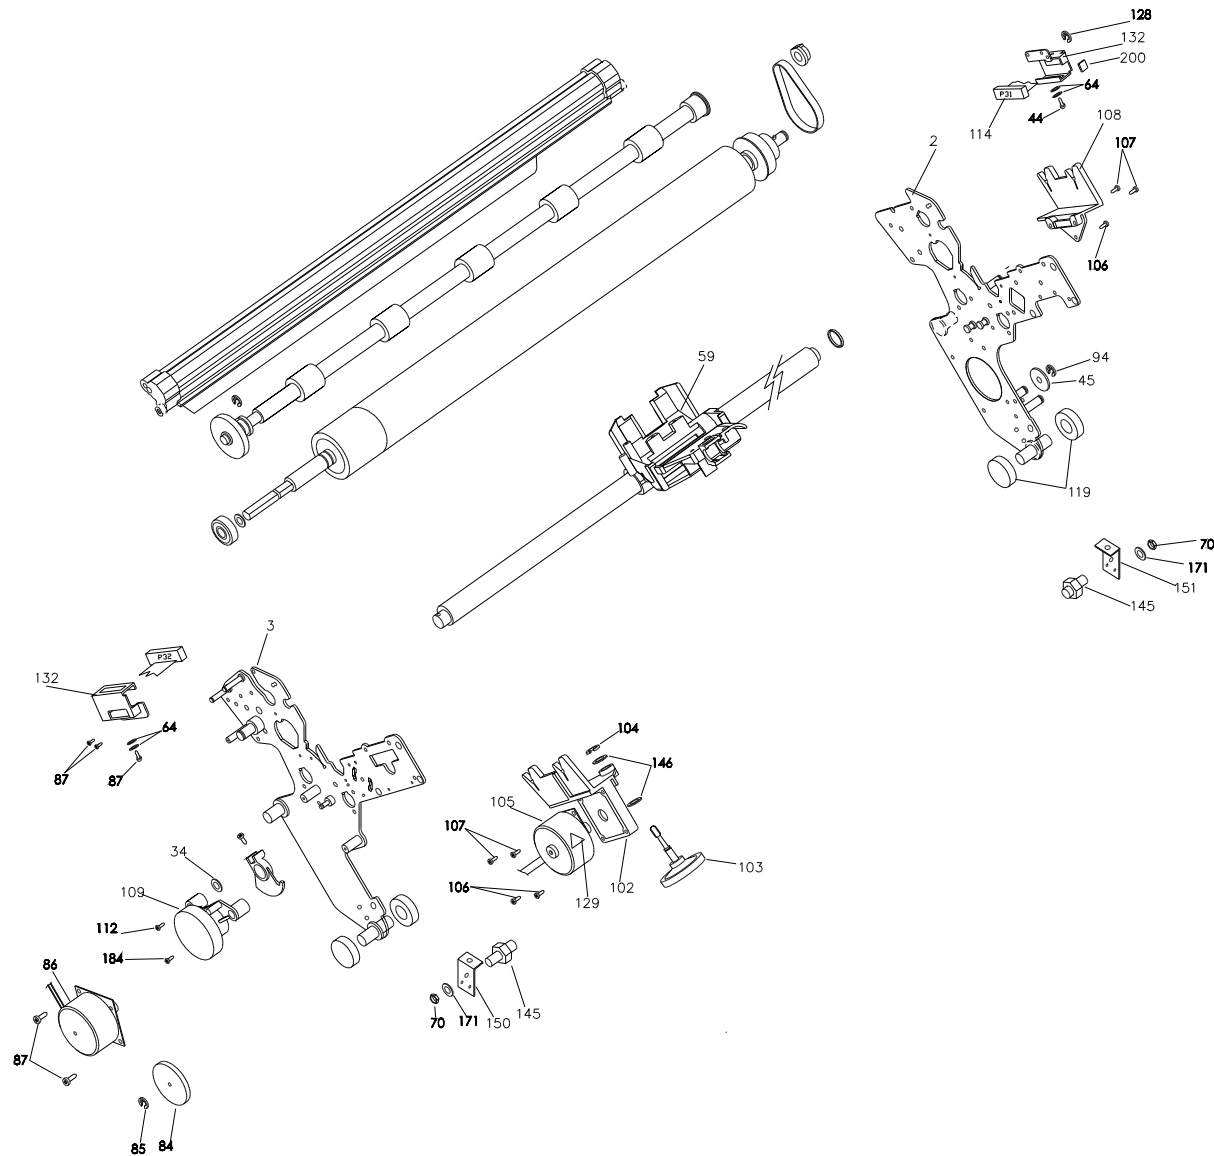


Table 8 : MECHANICAL ASSEMBLY III

Asm-Index	Part Number	Units	Description
-2	N.P.	1	Right Frame
-3	N.P.	1	Left Frame
-34	260060-002	1	Spacer (misc. Kit Item 16)
-44	260060-004	1	Screw M3x10 (misc. Kit Item 8)
-64	260060-006	1	Washer (misc. Kit Item 8)
-70	260060-006	2	Nut Hexagonal M5 (misc. Kit Item 18)
-84	260060-019	1	AGA Gear
-85	260060-006	1	Ring D.2.3 (misc. Kit Item 1)
-86	260060-051	1	AGA Motor Assembly
-87	260060-004	5	Screw M3x6 (misc. Kit Item 13)
-102	260060-041	1	Left Cartridge Support Assy
-103	260060-028	1	Pivot Assembly
-104	260060-006	1	Ring Benzing D.4 (misc. Kit Item 3)
-105	260060-050	1	Ribbon Motor Assembly
-106	260060-004	2	Screw M3x14 (misc. Kit Item 14)

Asm-Index	Part Number	Units	Description
-107	260060-005	4	Screw 2.9.x19 (misc. Kit Item 10)
-108	260060-040	1	Right Cartridge Support
-109	260060-024	1	AGA Indicator Group
-112	260060-004	2	Screw M3x8 (misc. Kit Item 15)
-114	260060-016	1	Alternance Cable
-128	260060-006	2	Washer D.3 (misc. Kit Item 15)
-129	N.P.	1	Warning Label
-132	N.P.	1	Tractor Cable Connector Plate
-145	260060-006	2	Pivot Mech. (misc. Kit Item 27)
-146	260060-006	1	Washer 60D (misc. Kit Item 26)
-150	N.P.	1	Tractor Support Bracket Right
-151	N.P.	1	Tractor Support Bracket Left
-171	260060-006	2	Washer Lock D5.3 (misc. Kit Item 28)
-184	260060-004	1	Screw M3x6 (misc. Kit Item 17)
-200	N.P.	1	Foam Strip

Figure 9 : LOWER TRACTOR ASSEMBLY

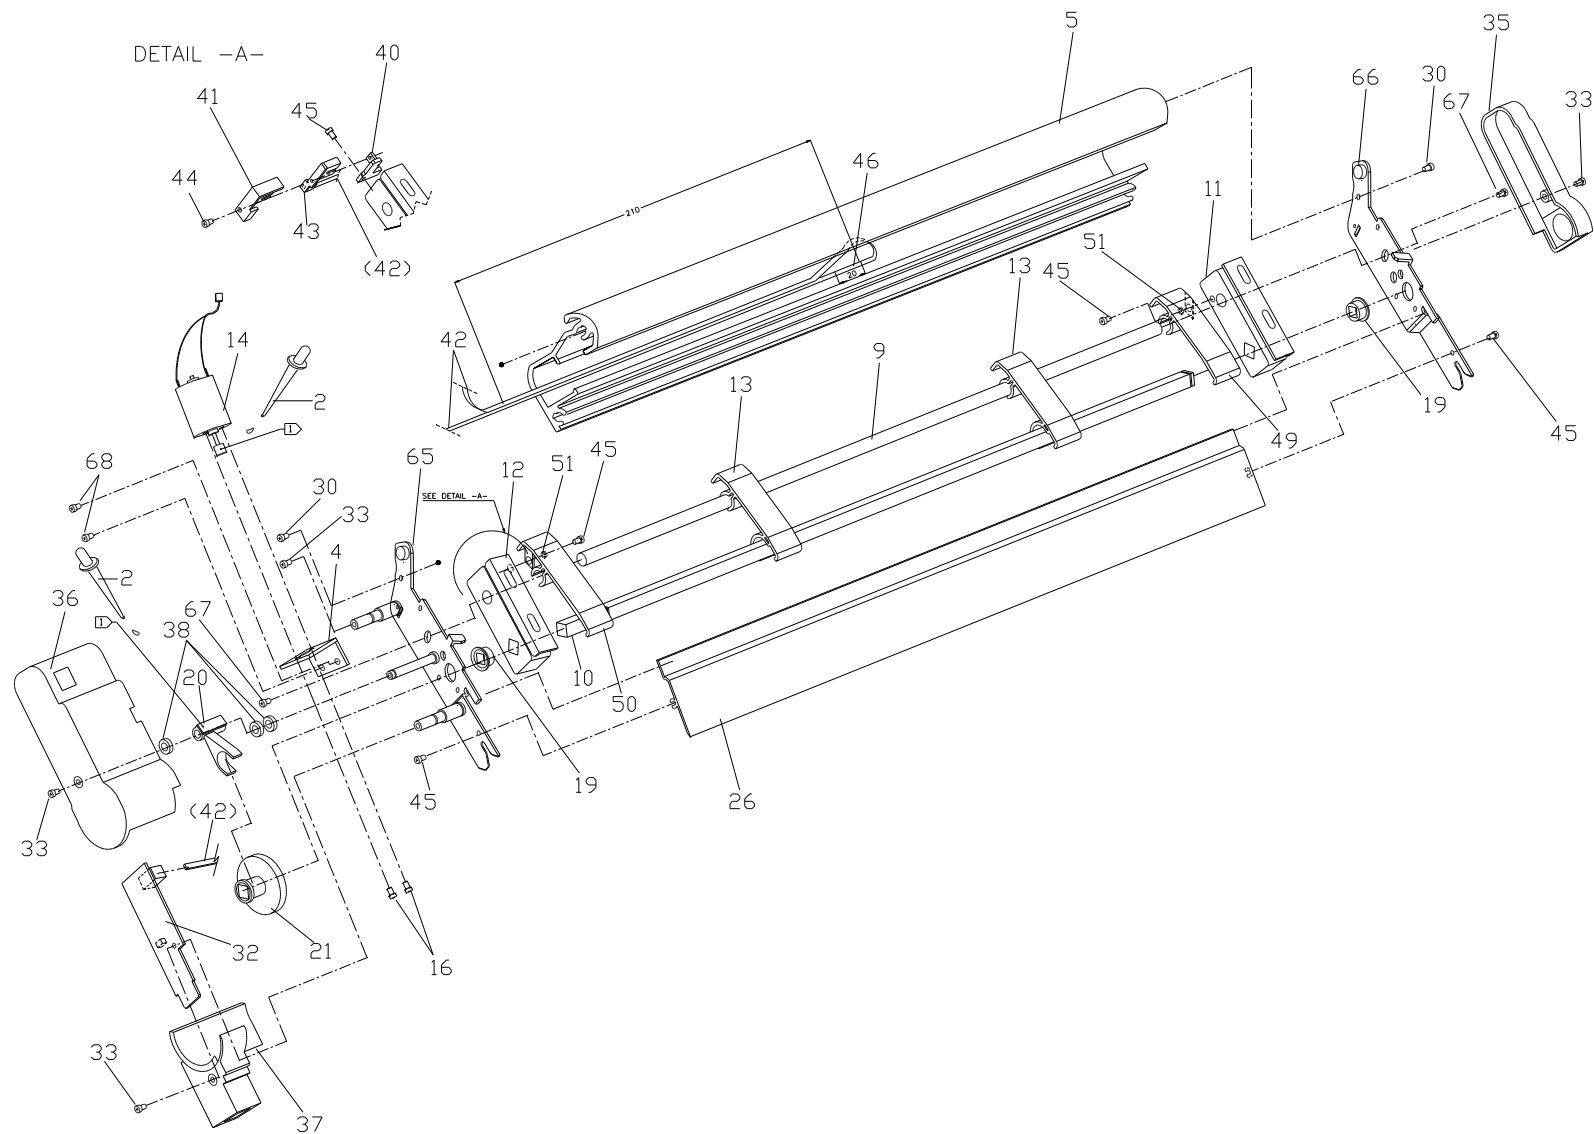


Table 9 : LOWER TRACTOR ASSEMBLY

Asm-Index	Part Number	Units	Description	Asm-Index	Part Number	Units	Description
Assy	260060-045	1	Lower Tractor Assy	-37	N.P	1	Connector Cover Black
-4	N.P.	1	Motor Support	-38	260060-003	3	O Ring
-5	N.P.	1	Tractor Profile				(Misc. Kit Item 14)
-9	N.P.	1	Tractor Spacer	-40	N.P	1	Jam Sensor Support
-10	N.P.		Tractor Bar	-41	N.P	1	Jam Sensor Protection
-11	260060-089	1	Tractor Paper Left 6 pin	-42	N.P	1	Jam Sensor Cable
-12	260060-090	1	Tractor Paper Right 6 pin	-43	N.P	1	PWA GX2JAM
-13	N.P	2	Paper Support	-44	260060-004	1	Screw M3x12
-14	N.P	1	T/F Motor Assembly				(Misc. Kit Item 8)
-16	N.P.	2	Special Screw	-45	260060-005	2	Screw 2.9x9.5
-19	260060-001	2	Bush				(Misc. Kit item 12)
			(Misc. Kit item 7)	-46	N.P.	1	Adhesive Tape
-20	N.P	1	Tractor Gear Bush	-49	N.P	1	Tractor Support Right
-21	N.P	1	Tractor Gear	-50	N.P	1	Tractor Support Left
-26	N.P.	1	Tractor Profile	-51	N.P.	2	Spacer
-30	260060-004	2	Screw 3.5x13	-52	260060-004	2	Screw M4x8
			(Misc. Kit item 13)				(Misc. Kit Item 8)
-32	N.P	1	PWA 2TR4JMS	-65	N.P.	1	Right Lower Support
-33	260060-004	4	Screw M3x6	-66	N.P.	1	Left Lower Support
			(misc. Kit item 17)	-67	260060-004	2	Screw M4x8
-35	N.P	1	Tractor Left Cover Black				(Misc. Kit Item 19)
-36	N.P	1	Fix. Tractor Right Cover Bl.	-68	260060-004	2	Screw M3x6
							(Misc. Kit Item 13)

Figure 10 : UPPER TRACTOR ASSEMBLY

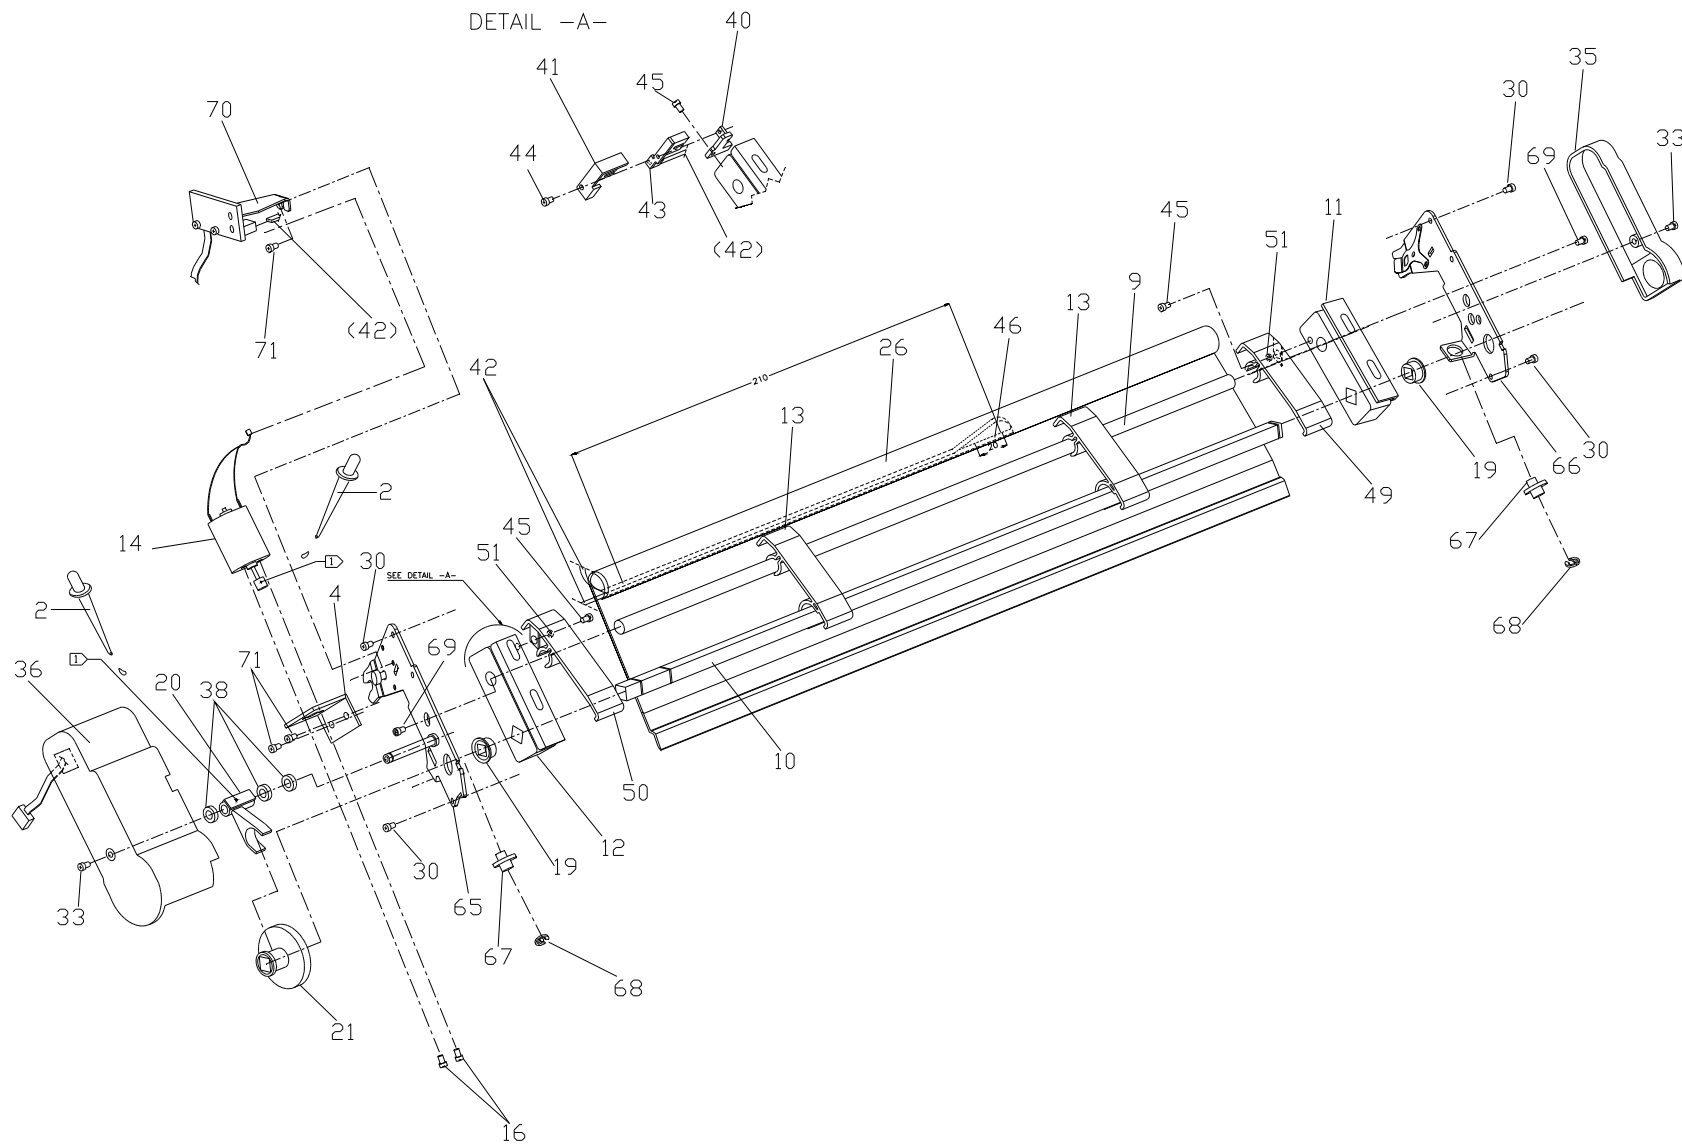


Table 10 : UPPER TRACTOR ASSEMBLY

Asm-Index	Part Number	Units	Description	Asm-Index	Part Number	Units	Description
Assy	260056-001	1	Upper Tractor Assy	-42	N.P	1	Jam Sensor Cable
-4	N.P.	1	Motor Support	-43	N.P	1	PWA GX2JAM
-9	N.P.	1	Tractor Spacer	-44	260060-004	1	Screw M3x12 (Misc. Kit Item 8)
-10	N.P.		Tractor Bar	-45	260060-005	2	Screw 2.9x9.5 (Misc. Kit item 12)
-11	260060-089	1	Tractor Paper Left 6 pin	-46	N.P.	1	Adhesive Tape
-12	260060-090	1	Tractor Paper Right 6 pin	-49	N.P	1	Tractor Support Right
-13	N.P	2	Paper Support	-50	N.P	1	Tractor Support Left
-14	N.P	1	T/F Motor Assembly	-51	N.P.	2	Spacer
-16	N.P.	2	Special Screw	-65	N.P.	1	Right Lower Support
-19	260060-001	2	Bush (Misc. Kit item 7)	-66	N.P.	1	Left Lower Support
-20	N.P	1	Tractor Gear Bush	-67	260060-004	2	Screw M4x8 (Misc. Kit Item 19)
-21	N.P	1	Tractor Gear	-68	260060-004	2	Screw M3x6 (Misc. Kit Item 13)
-26	N.P.	1	Tractor Profile	-69	260060-004	2	Screw M4x8 (Misc. Kit Item 19)
-30	260060-004	2	Screw 3.5x13 (Misc. Kit item 13)	-70A	N.P	1	PWA 2TRTUJ
-33	260060-004	4	Screw M3x6 (misc. Kit item 17)				
-35	N.P	1	Tractor Left Cover Black				
-36	N.P	1	Fix. Tractor Right Cover Bl.				
-38	260060-003	3	O Ring (Misc. Kit Item 14)				
-40	N.P	1	Jam Sensor Support				
-41	N.P	1	Jam Sensor Protection				

Chapter 4 Miscellaneous Kits Spare Parts Lists

Table 11 : Miscellaneous Kits

Asm-Index	Part Number	Units	Description
	260060-001		KIT MECHANICAL I
-1		1	Spring 3
-2		2	Spring
-3		2	Spring
-6		2	Spring
-7		1	Bush
-8		2	Bush 20
-9		2	Bush Sint.
-10		1	Bearing
-11		1	Pivot
-12		1	Roller Sprinr
-13		1	Bush-700

Asm-Index	Part Number	Units	Description
	260060-002		KIT MECHANICAL II
-1		1	Vibrodamp
-2		2	Damper VGA
-3		2	Latch Magnetic
-4		1	Sensor Plate
-5		1	Bearing Retainer
-6		1	Damper Spacer
-7		1	Shaft Retainer
-8		1	Stud 33/24
-9		1	Spring Guide
-10		1	Cable Ratainer 2
-11		1	Spacer ST
-12		2	Clamp for Cable
-13		1	Clamp for Cable
-14		1	Clamp 79
-15		1	Spacer

Table 11 : Miscellaneous Kits (continued)

Asm-Index	Part Number	Units	Description	Asm-Index	Part Number	Units	Description
	260060-004		KIT METRIC SCREWS		260060-006		KIT WASHER & CIRCLIPS
-1		3	Screw TSIC M3x6	-1		5	Ring Benzig D.2.3
-2		4	Screw TCCE M4x14	-2		5	Ring Benzig D.3.2
-3		3	Screw TCIC M3x4	-3		5	Ring Benzig D.4
-4		3	Screw TCIC M2x8	-4		5	Ring Benzig D.5
-5		3	Screw TCIC M3x8	-5		5	Ring Benzig D.6
-6		3	Screw TSIC M3x4	-6		5	Ring Benzig D.7
-7		3	Screw TSIC M3x8	-7		5	Ring Benzig D.8
-8		3	Screw TCIC M3x10	-8		5	Special Washer
-9		3	Screw TCIC M4x6	-9		5	Ring Ret D.4
-10		3	Screw TCIC M4x8	-10		5	Ring Ret D.8
-11		3	Screw TCIC M4x6	-11		5	Thrust Washer 22
-12		3	Screw TCCI M3x6	-12		5	Washer 21
-13		3	Screw TCIC M3x6	-13		5	Washer Flat D4.3
-14		3	Screw TCIC M3x14	-14		5	Washer Quick Lock D6
-15		3	Screw TCIC M3x8	-15		5	Washer Quick Lock D8
-16		3	Screw TCIC M3x4	-16		3	Friction Spacer
-17		3	Screw TCIC M3x6	-17		5	Nut hexagonal M3
-18		3	Screw TCCI M3x10	-18		5	Nut hexagonal M5
-19		3	Screw TCIC M4x8	-19		5	Insulating Washer
-20		3	Screw TCIC M3x4	-20		5	Washer Flat D3.2
-21		3	Screw TCIC M3x30	-21		2	Washer 60D
-22		3	AGA Stud	-22		2	Screw TCCI M2x6
-23		3	Screw TSIC M4x6	-23		2	Washer D. 2.2
				-24		5	Thrust Washer
				-25		5	Washer Internal Teeth
				-26		2	Washer Slip D.3.2
				-27		2	Pivot Mech.
				-28		2	Washer Lock D5.3
				-29		2	Nut Hexagonal M4

Table 11 : Miscellaneous Kits (continued)

Asm-Index	Part Number	Units	Description
	260060-003		KIT PLASTIC PARTS
-1		1	Mechanical Block
-2		1	Mechanical Block 1
-4		1	Spacer
-5		1	Support Sensor
-6		1	Belt Bracket
-7		1	Slide
-8		2	Bush
-9		2	Spacer
-10		1	Spacer
-11		2	Bushing
-12		6	Fastener Loop Self Lock
-13		12	Fastener Loop Self Lock
-14		3	O Ring D4.48
-15		3	O Ring D 5
-16		2	Fastener Loop Self Lock
-17		2	Fastener Loop Self Lock

Asm-Index	Part Number	Units	Description
	260060-005		KIT SELF TAPPING SCREWS
-1		5	Screw TCIC M3.5x13
-4		5	Screw TCIC M2.2x6.5
-5		5	Screw TCIC M2.2x13
-6		5	Screw TCIC M2.2x9.5
-7		5	Screw TCIC M3.5x16
-8		5	Screw TCIC M2.9x9
-9		5	Screw TCIC M2.9x13
-10		5	Screw TCIC M2.9x19
-11		5	Screw TCIC M2.5x4
-12		5	Screw TSIC M2.9x9.5
-13		5	Screw TCICB 2.9x9.5
-14		5	Screw ST 2.9x9.5
-15		5	Screw ST 2.9x6.5
-16		5	Screw TSIC 3.5x13
-17		5	Screw TCIC 3.9x13
-18		5	Screw TCIC 3.9x25
-19		5	Screw TSIC 3.5x19





Part Number: xxxxxx

PRINTRONIX
Corporate Office: 15345 Barranca Parkway Irvine
CA 92618 United States
Tel. (800) 665-6210

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
This manual refers to various company and products by their trade names.
In most of the cases, these designations are claimed as trademarks or
registered trademarks by their respective companies.

Copyright 2017 PRINTRONIX s.r.l. - Printed in Italy