

Compuprint 4247 Serial Matrix Printers

Compuprint 4247 Model Z03 Printer:
User's Guide

MAN10297.00.00



Before using this information and the product it supports, read the information in “Notices” on page 185.

First edition (October 2011)

This edition applies to the Compuprint 4247 Z03 printer and to all subsequent releases and modifications until otherwise indicated in new edition.

Internet

Visit our home page: <http://www.compuprint.com>

You can send comments by e-mail to : support@compuprint.com or by mail to:

Compuprint s.r.l.
Via Lombardore 282
10040 Leinì (Turin)
ITALY

Contents

Figures vii

Tables ix

Safety and environmental notices xi

Safety notices xi
 Danger hazard level xi
 Caution hazard level xi
 Attention notices xi
 Safety precautions xii
 Electrical safety xii
 Approved power cord and receptacle xii
 Electrical safety and portable power strip
 receptacles xii
 Connecting or disconnecting a communication
 port, a teleport, or an attachment connector xiii
 Servicing during an electrical storm xiii

How to use this guide xv

Chapter 1. Getting Started 1

Setting up the 4247 Model Z03 Printer 2
 Choosing a suitable location 2
 Performing a power-receptacle safety-check 3
 Unpacking the 4247 Model Z03 Printer 4
 Moving the printer to the final location 6
 Locating Printer Parts 7
 Removing the shipping locks 9
 Installing the Controller Board 9
 Installing the operator panel overlay 12
 Installing the ribbon cartridge 12
 Connecting the power cord 15
 Turning on the printer 16
 Changing the display language (from the default,
 English) 16
 Loading fanfold paper 17
 Printing the Quick Reference as a test page 20
 Installing the optional second tractor 21
 Printing a configuration sheet 25
 Attaching the 4247 Printer to your computer 25
 Software driver selection 26
 Completing printer setup 26

**Chapter 2. Understanding the operator
 panel 27**

Status Indicators 27
 READY 27
 PROCESSING 28
 ATTENTION 28
 Display panel 28
 Audible alarm 28
 Custom set In-Use indicator 29
 Function keys 29
 MENU 30

SCROLL/MICRO↑ or SCROLL/MICRO↓ 30
 ENTER 31
 RETURN 32
 PARK/PATH 32
 LINE FEED 33
 LOAD/EJECT 33
 FORM FEED 34
 SET TOP OF FORM 34
 START 35
 STOP 35
 CANCEL PRINT 36
 TEST 36

**Chapter 3. Checking and changing
 configuration parameter values 37**

Printing configuration defaults 37
 Checking and changing parameter values 38
 Exiting the configuration menu 39
 Exiting using START 39
 Exiting using RETURN 39
 Locking printer configuration menu 40
 Configuration categories 40
 Configuration storage 40
 Attachment 41
 IPDS Configuration 41
 ASCII Configuration 42
 Printer setup 45
 Printer adjustment 46
 Power on reset 47
 Display Language 47
 Vital Product Data 47
 Quiet Print 48
 Hex Print 48
 Quit from Menu 48

Chapter 4. Configuration storage 49

Custom sets 49
 Non-custom set 49
 Save current values in custom sets 50
 Recall custom set values 51
 Power-on custom set 52
 Power-on paper source 53
 Recall factory defaults 54
 Printing custom sets 55

Chapter 5. Attachment Options 57

Chapter 6. IPDS Configuration 59

Characters Per Inch (CPI) 59
 Lines Per Inch (LPI) 60
 Maximum Print Position (MPP) 60
 Maximum Page Length (MPL) 61
 Print Quality 62
 Host Fast Draft 63

Print Language	64
Emulation Mode.	65
Media Size Priority	66
Bar Code Mode	67
Graphics Mode	68
Alarm Control	68

Chapter 7. ASCII Configuration 71

Characters Per Inch (CPI).	71
Lines Per Inch (LPI)	72
Maximum Print Position (MPP).	73
Maximum Page Length (MPL)	74
Perforation Skipping	75
Emulation Mode.	75
Print Language	76
Print Quality	78
Host Fast Draft	79
NLQ Typeface	79
Character Set	80
Printer Compatibility 3 (Automatic Line Feed on Carriage Return).	81
Printer Compatibility 4 (Automatic Carriage Return on Line Feed).	82
Printer Compatibility 5 (Form Feed Suppression).	83
Printer Compatibility 6 (Init)	84
Printer Compatibility 7 (Condensed Print)	85
Printer Compatibility 8 (Slashed Zero)	86
Printer Compatibility 9 (20 CPI)	87
Alarm Control	88
Override Host Parameters	89
Paper Source	89
Characters Per Inch (CPI).	89
Lines Per Inch (LPI)	90
Maximum Page Length	91
Parallel Interface.	92
Interface Type	92
Input Buffer Size	92
Select-In	93
AutoFeed-XT	94
Serial Interface	95
Interface Type	95
Input Buffer Size	95
Data Bits	96
Baud Rate	97
Parity	97
Pacing Control	98
Connection Type.	99
LAN Interface	100
IP Address Assignment	100
IP Address	100
Subnet Mask	101
Default Gateway	102
Host Name	102
Workgroup Name	103
SMTP Service	104
Mail Server Address	104
E-Mail Address (Receiver)	105
E-Mail Address (Sender).	106

Chapter 8. Printer Setup. 107

Paper Source	107
Front Forms Backup	108
Rear Forms Backup	108
Continuous Forms Linking	109
Form Feed Mode	110
Controlling Tear Off Operations	110
Using Automatic Eject to Control Forms Eject	111
Using Automatic Restore to Control Restoring of Forms	111
Automatic Eject.	112
Automatic Restore.	113
Continuous Forms Eject Mode.	114
Bar Code Print Direction	114
Graphics Print Direction	115
Perforation Safety	116
Jam Sensors	116

Chapter 9. Printer Adjustments 119

Paper-Load-Position to Tear-Position Relationship	119
Front Automatic Forms Thickness Adjustment (AFTA)	120
Front Tear Position	120
Front Left Margin Alignment	121
Front Paper Load Position	121
Rear Automatic Forms Thickness Adjustment (AFTA)	122
Rear Tear Position	123
Rear Left Margin Alignment	123
Rear Paper Load Position	124
Bidirectional Adjustment	124
Sensor Tune	125
Quit From Menu	126

Chapter 10. Power-On Reset (POR) 127

Chapter 11. Display Language 129

Chapter 12. Vital Product Data 131

Serial Number	131
Device Specific Information	132

Chapter 13. Quiet Print 133

Chapter 14. Hex Print 135

Chapter 15. Quit From Menu 137

Chapter 16. Dual Push Tractor Forms Paths 139

Introduction	139
Forms selection.	139
Using different forms on two paths	140
Setting up printer	140
Using path switching.	140
Using same forms on both paths (linking)	141
Setting up printer	141
How forms linking works	142
Parking one continuous form and loading another	142
Parking a continuous form	142

Changing the forms path 142

Chapter 17. Using the Operator Print

Tests 143

General Test Instructions 143
 Quick Reference 144
 Printer demonstration 144
 Printer Configuration. 144
 Print Custom Sets 145
 Firmware Information 146
 Printer Adjustments 146

Chapter 18. Supplies, optional features, and maintenance. 149

Continuous forms specifications 149
 Forms stacking recommendations 150
 Forms stack input and output locations 150
 Supplies 151
 Optional features 151
 Maintenance. 152
 Removing the ribbon cartridge 152
 Cleaning the Printer 152

Chapter 19. Problem Solving. 155

Using Status Code and Problem Listings 155
 Status Code and Messages Displays 155
 No Status Code Displays 155
 Status codes and recovery actions 156
 Problem list index 160
 Forms problems 163
 Print quality and ribbon problems 164
 Configuration problems 166
 Miscellaneous problems 166
 Clearing Forms Jams 166

Appendix A. Printer Specifications 169

General information 169
 Operating and service clearance 170
 Physical dimensions and minimum clearances 170
 Weight 170
 Power consumption 170
 Heat output 171
 Airflow 171
 Declaration of Product Noise Emission Values 171
 The Parallel Interface. 172
 Parallel connector pin assignments 172
 The Serial Interface 173
 RS-232C connector pin assignments 173
 The LAN Interface 174
 LED Indicators 174
 Environmental requirements 174
 Operating environment 174
 Shipping environment 174
 Storage environment 175
 Electrical requirements 175
 Power cord 175
 Safety 176
 Branch circuits and grounding. 176

Appendix B. 4247 Model Z03 - Configuration Menu. 177

Appendix C. Printer driver support 179

IBM pSeries AIX colon files. 179
 IBM System i workstation customization objects 179

Index 181

Notices 185

Figures

1. Printer clearances	2	24. Spacing the paper guides and opening the sprocket covers	18
2. Unpacking the printer	4	25. Placing the form on the tractor pins	19
3. Contents of the carton	5	26. Placing the forms on the right tractor pins	19
4. Lifting the printer	6	27. Aligning the form	20
5. Front view of the printer	7	28. Opening the tractor area cover	21
6. Inside view of the printer	7	29. Unpacking the second tractor	21
7. Rear view of the printer	8	30. Installing the second tractor	22
8. Power switch	8	31. Connecting the second tractor to the first	22
9. Opening the tractor area cover and removing the shipping locks.	9	32. Rotating the tractor gear protection cover downwards	22
10. Opening the upper printer cover	9	33. Rotating the second tractor into the closed operating position	23
11. Removing the two screws on the metal plate.	10	34. Loading paper into the first tractor.	23
12. Sliding the board in the slot.	11	35. Disengaging the tractor	24
13. Attaching the Controller Board.	11	36. Closing the tractor gear protection cover	24
14. Printer Operator Panel	12	37. 4247 Z03 Printer operator panel.	27
15. Ribbon cartridge	12	38. Example of LPI and page length	62
16. Aligning the cartridge pins with the locking grooves	13	39. Example of LPI and page length	74
17. Positioning the ribbon guide over the printhead	13	40. Forms stacking recommendations	150
18. Positioning the snap arm	14	41. Forms stacking recommendations	151
19. Aligning the ribbon mounting pins	14	42. Freeing the shifter holder	152
20. Connecting the power cord	15	43. Rotating the bail assembly	167
21. Turning on the printer	16	44. Gripping the bail assembly	167
22. Opening the tractor area cover	17	45. Inserting the left and right paper bail end caps.	167
23. Unlocking the tractors	18		

Tables

1. Configuration storage category	40	18. Forms do not feed past printhead.	160
2. Attachment Category	41	19. Forms do not stack correctly	160
3. IPDS Configuration Category	41	20. Characters off registration	161
4. ASCII Configuration	42	21. Unreadable characters.	161
5. Printer setup	45	22. Missing dots or irregular characters	161
6. Printer Adjustment	46	23. Ribbon smudging forms	161
7. Power On Reset	47	24. Printing is too light or partial characters print	161
8. Display Language	47	25. Ribbon snagging, tearing, or not moving	161
9. Vital Product Data category	47	26. Line-to-line horizontal misregistration	162
10. Quiet Print Category	48	27. Printer doesn't print or prints wrong	
11. Hex Print Category	48	characters.	162
12. Quit From Menu category.	48	28. Printer has no power	162
13. Supported Print Languages	64	29. Throughput of printer at half speed	162
14. Single Path Usage recommendations	112	30. Sound emission levels in the Fast Draft Print	
15. Dual Path Usage recommendations	112	Mode	171
16. Display Languages.	129	31. RS232/C serial interface signals	173
17. Forms buckle, twist, jam, or tractor holes tear	160		

Safety and environmental notices

Safety notices

There are two levels of safety notices: **Danger** and **Cautions**.

Danger hazard level

The word **Danger** indicates the presence of a hazard that has the potential of causing death or serious personal injury.

Most **DANGER** notices are numbered <1-1>, <1-2>, and so forth where they appear in the text of this manual.

Example of a **Danger** notice:



DANGER

<1-10> Hazardous voltages are present. Do not touch the pins or sockets of the power receptacle.

Caution hazard level

The word **Caution** indicates the presence of a hazard that has the potential of causing moderate or minor personal injury.

Most **CAUTION** notices are numbered <2-1>, <2-2>, and so forth where they appear in the text of this manual.

Example of a **Caution** notice:



CAUTION:

<2-22> Carefully follow all cleaning instructions, using only the materials and solutions recommended.

Attention notices

The word **Attention** calls attention to the possibility of damage to a program, device, system, or data.

Attention notices are not numbered.

Examples of an **Attention** notices:

Attention: This printer has nominal AC input power requirements (see “4247 Model Z03 Printer nominal AC input power requirements” on page 3).

Safety precautions

Electrical safety

This printer is inspected and listed by recognized national testing laboratories, such as Underwriters Laboratories, Inc. (UL) in the U.S.A. and Canadian Standards Association (CSA) in Canada. Listing of a product by a national testing laboratory indicates that the product is designed and manufactured in accordance with national requirements intended to minimize safety hazards. This equipment meets a very high standard of safety in design and manufacture. Remember, however, that this product operates under conditions of high electrical potentials and heat generation, both of which are functionally necessary.

Because the paper used in the printer can burn, you should take normal precautions to prevent fire. These precautions include common-sense measures, such as keeping potentially combustible materials (for example, curtains and chemicals) away from the printer, providing adequate ventilation and cooling, limiting unattended operation, and having trained personnel available and assigned to the printer.

Approved power cord and receptacle



DANGER

<1-11> Your country may require an approved power cord and plug. Ensure that you have the correct power cord and plug. Use this cord and plug only with an approved, correctly-installed power receptacle.

Electrical safety and portable power strip receptacles

Extension cords



DANGER

DANGER<1-1> Do not use an extension power-cord.

The customer must supply the correct electrical outlet which must meet the requirements stated under Appendix A, "Printer Specifications," on page 169.

Portable power strip receptacles (temporary power taps)

Portable power strip receptacles (referred to as "temporary power taps" by the National Electrical Code) may be used if they are fully approved in the customer's geographic location. It is the customer's responsibility to supply a fully approved "temporary power tap", if one is to be used.

Connecting or disconnecting a communication port, a teleport, or an attachment connector



DANGER

<1-14> Switch off printer power and unplug the printer power cord before connecting or disconnecting a communication port, a teleport, or other attachment connector.

Servicing during an electrical storm



DANGER

<1-13> Do not connect or disconnect a communication port, a teleport, or any other connector during an electrical storm.

How to use this guide

This guide describes the basic operating procedures for the 4247 Model Z03 printer. This information is useful to those who install or operate the printer, or for those who supervise printer operations. You need only basic operating experience to use this printer. This experience includes an understanding of how printers work, how to connect cables, and how to select items from an operator panel menu.

The following list describes the contents of each chapter and the appendixes in this book:

- **Chapter 1, “Getting Started”**, provides information on setting up the printer and connecting it to the host computer.
- **Chapter 2, “Understanding the operator panel”**, describes the operator panel and how to use it.
- **Chapter 3, “Checking and changing configuration parameter values”**, describes the configuration parameters and values and gives you a brief description and procedure for changing them.
- **Chapter 4, “Configuration storage”**, provides information on saving configuration parameters into a custom set for your printer. The configuration storage category has eight available custom sets.
- **Chapter 5, “Attachment Options”**, describes the procedures for setting your printer attachment.
- **Chapter 6, “IPDS Configuration”**, describes how to check and change IPDS™ configuration parameters for your 4247 printer.
- **Chapter 7, “ASCII Configuration”**, describes the procedures for checking and changing parameter values for parallel and serial attachments.
- **Chapter 8, “Printer Setup”**, describes the procedures for checking and changing the parameter values in the configuration menu for the printer setup category.
- **Chapter 9, “Printer Adjustments”**, describes the parameters for checking and changing the parameter values in the configuration menu for the printer adjustment category.
- **Chapter 10, “Power-On Reset (POR)”**, describes the procedure to perform a power-on reset for your printer.
- **Chapter 11, “Display Language”**, provides information on the display languages shipped with your printer.
- **Chapter 12, “Vital Product Data”**, provides information to check and change some of the vital product data for the printer.
- **Chapter 16, “Dual Push Tractor Forms Paths”**, describes forms and paper loading, and running a print job through the two continuous forms paper paths.
- **Chapter 17, “Using the Operator Print Tests”**, describes procedures for testing and adjusting the printer.
- **Chapter 18, “Supplies, optional features, and maintenance”**, and maintenance, provides the information you need for ordering new supplies, replacing damaged or worn ribbons, and available printer options.
- **Chapter 19, “Problem Solving”**, describes how to diagnose and solve printer problems. Always start your problem determination procedure with this chapter.

- **Appendix A, “Printer Specifications”**, contains general printer information and planning requirements. It also contains information on the electrical and environmental requirements, cabling information, and forms specifications.
- **Appendix B, “4247 Model Z03 - Configuration Menu,” on page 177** contains a hierarchical representation of the Configuration Menu.
- **Appendix C, “Printer driver support,” on page 179** contains information about downloading drivers for your printer.

Chapter 1. Getting Started

Setting up the 4247 Model Z03 Printer	2	Handling the Controller Board	9
Choosing a suitable location	2	Inserting the Controller Board	10
Performing a power-receptacle safety-check	3	Installing the operator panel overlay	12
4247 Model Z03 Printer nominal AC input		Installing the ribbon cartridge	12
power requirements	3	Connecting the power cord	15
Unpacking the 4247 Model Z03 Printer	4	Turning on the printer	16
Checking the carton contents	5	Changing the display language (from the default,	
Other options available	5	English)	16
Moving the printer to the final location	6	Loading fanfold paper	17
Locating Printer Parts	7	Printing the Quick Reference as a test page	20
Front view	7	Installing the optional second tractor	21
Inside view	7	Removing the optional second tractor	24
Rear view	8	Printing a configuration sheet	25
Left side view	8	Attaching the 4247 Printer to your computer	25
Removing the shipping locks	9	Software driver selection	26
Installing the Controller Board	9	Completing printer setup	26


This section guides you through setting up your 4247 Model Z03 printer. The partial table of contents at the beginning of the chapter shows the procedures involved in this setup process. Refer to this list for specific procedures and page locations.

Perform Each Step in Order

Complete each step before you start the next one. If you cannot successfully complete all of the following steps, call your place of purchase.

Setting up the 4247 Model Z03 Printer

Choosing a suitable location



CAUTION:

<2-81> The 4247 Model Z03 printer has an optional printer pedestal. If the printer is installed on any other stand or surface, this stand or surface must support the printer weight of 33 kg (73 lb) and withstand the print action vibration.

Consider the following:

- For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.
- The distance between the printer and the host computer must not exceed the length of the interface cable.
- Your printer should not be exposed to direct sunlight, extreme heat, cold, dust or humidity (see Appendix A, "Printer Specifications," on page 169).
- Ensure that sufficient clearances exist on all sides for operation and servicing. The required space is shown in the following illustration.

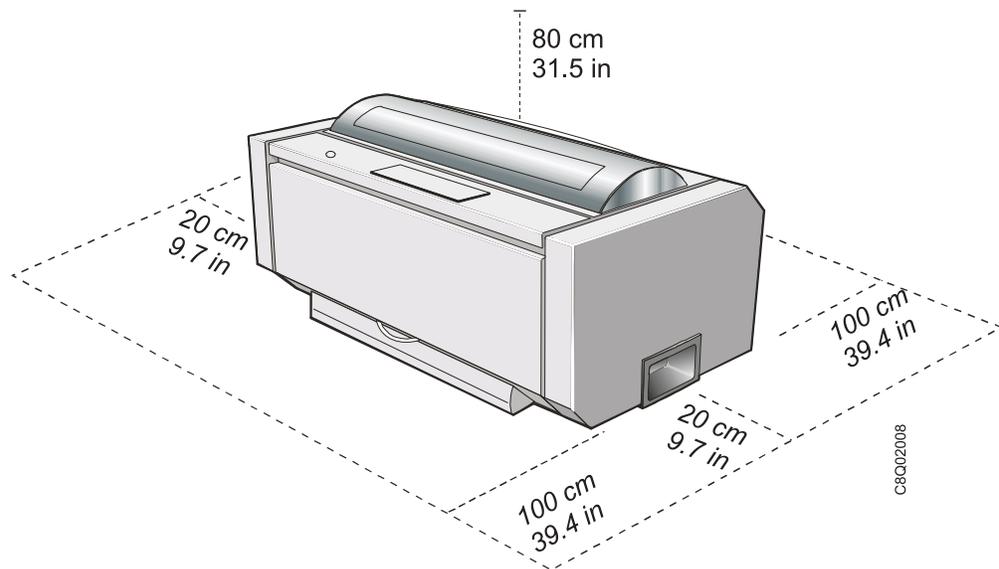


Figure 1. Printer clearances

Performing a power-receptacle safety-check



DANGER

<1-10> Hazardous voltages are present. Do not touch the pins or sockets of the power receptacle.

For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.

“Portable power strip receptacles (temporary power taps)” on page xii, conforming to all requirements, may be used.

A qualified electrician should perform all checks necessary to ensure safe operation. These should include the following checks and any other required by local regulations.

- Check the AC voltage at all associated power receptacles (see “4247 Model Z03 Printer nominal AC input power requirements”).
- Check that all associated power receptacles are properly grounded.

4247 Model Z03 Printer nominal AC input power requirements

Attention: If the voltages are not within the correct operating range, allow for correction before the equipment is plugged in and operated.

Nominal Voltage	Voltage Range	Amps	Phase / Hz
100–230 Vac	90–264 Vac	2.9–1.3 A	Single phase / 50–60 Hz

Unpacking the 4247 Model Z03 Printer

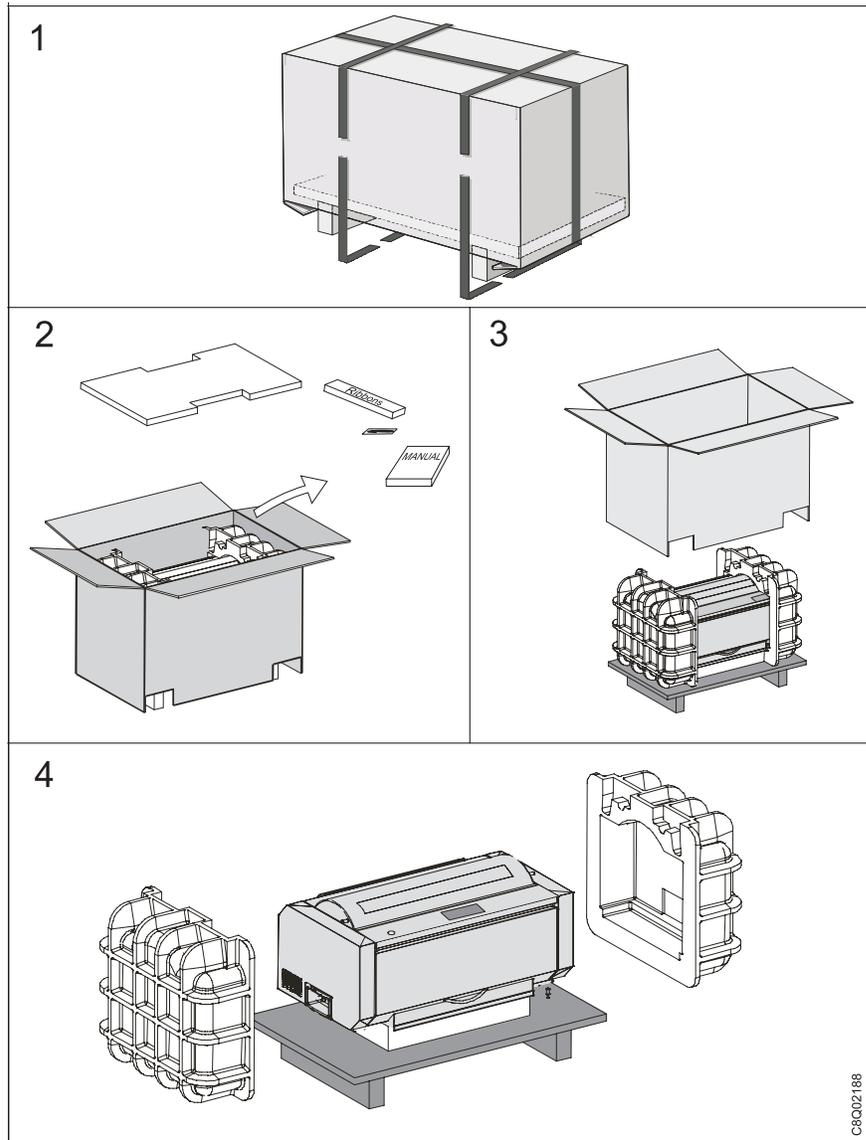


Figure 2. Unpacking the printer

Checking the carton contents

Review the following list of contents as you unpack the shipping container. Contact your point of purchase if any items are missing.

- 4247 Model Z03 Printer
- Power cord
- Printer documentation
- Controller Board
- Ribbon cartridge
- Operator panel overlay
- Second tractor (optional)

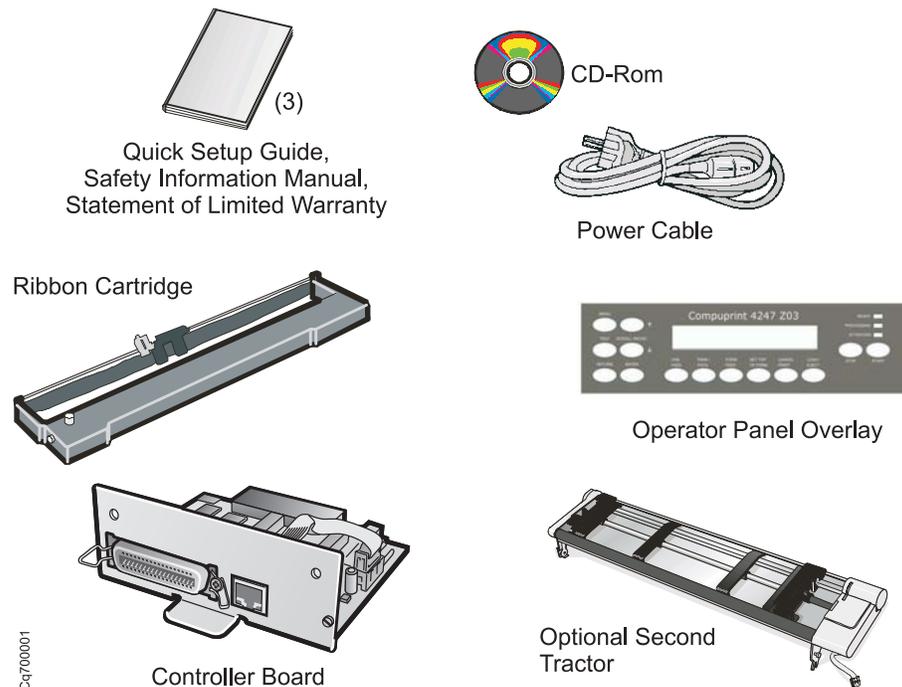


Figure 3. Contents of the carton

Other options available

Additionally, you can order the following options (not pictured here).

- **Printer Stands** - Provides adequate printer support, and especially helpful when using the Dual Push forms path. There are two printer stand options:
 - Enclosed paper shelf cabinet printer stand.
 - Open paper shelf printer stand.
- **Controller Board** - There are three Controller Board options:
 - Allows a host connection to parallel, serial, and USB 2.0 interfaces.
 - Allows a host connection to parallel and ASCII Ethernet 10/100 BaseT LAN network interfaces.
 - Allows a host connection to parallel and ASCII-IPDS Ethernet 10/100 BaseT LAN network interfaces.

Moving the printer to the final location

Do not plug in the printer power cord until instructed to do so.

1. Remove the plastic covering.

Keep the packing material in a safe place. It should be used if you need to repack the printer for shipment.



CAUTION:

<2-82> The 4247 Model Z03 printer weighs 33 kg (73 lb). Two persons are required to lift it.



CAUTION:

<2-83> The lifting handles are located forward of the center of gravity. For good printer balance, each person should place one hand in a gray lifting handle and the other hand under the rear of the printer.

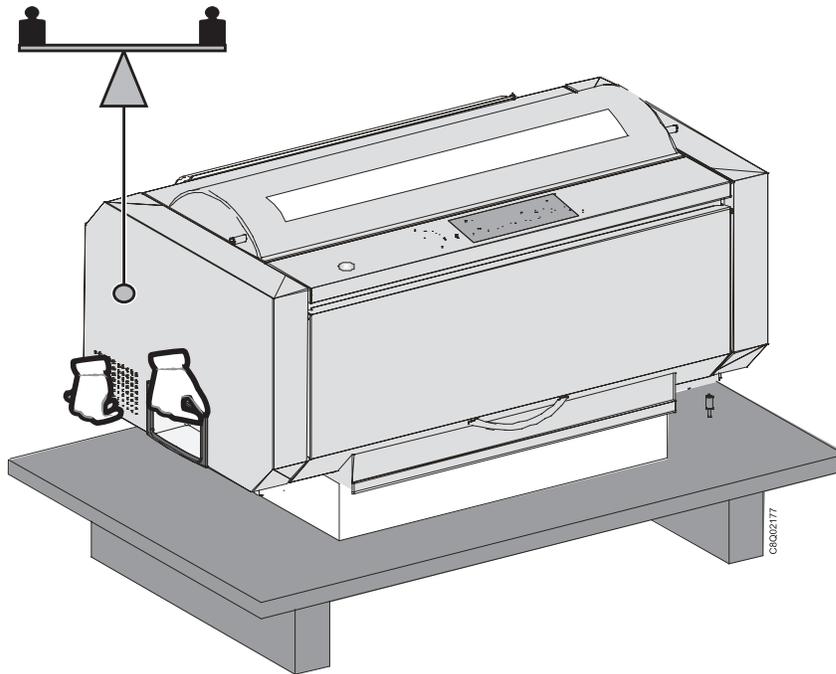


Figure 4. Lifting the printer

2. Using two persons, safely move the printer to the selected location (see "Choosing a suitable location" on page 2).

Locating Printer Parts

Refer to the following illustrations to familiarize yourself with the 4247 Model Z03.

Front view

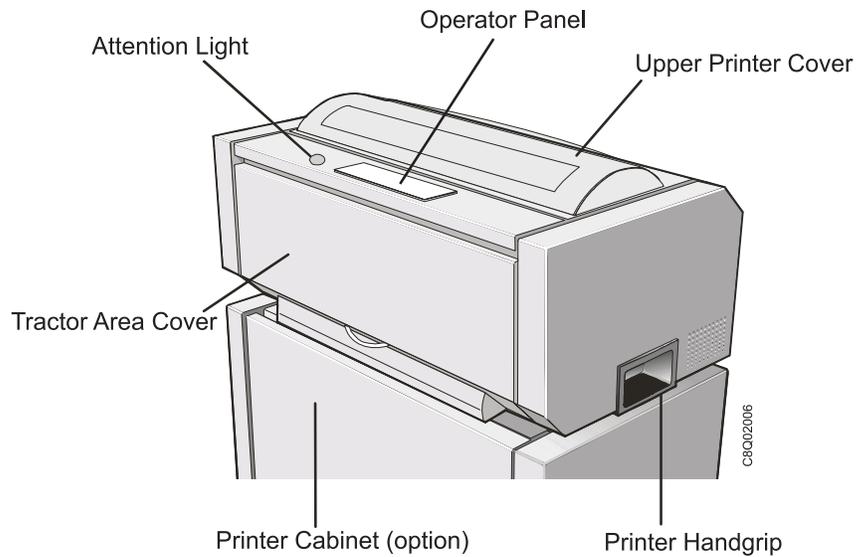


Figure 5. Front view of the printer

Inside view

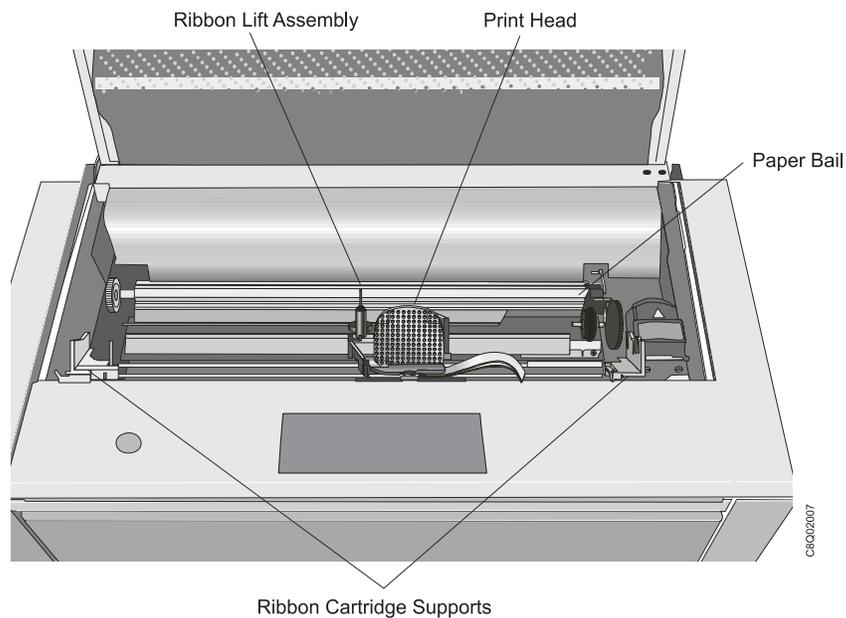


Figure 6. Inside view of the printer

Rear view

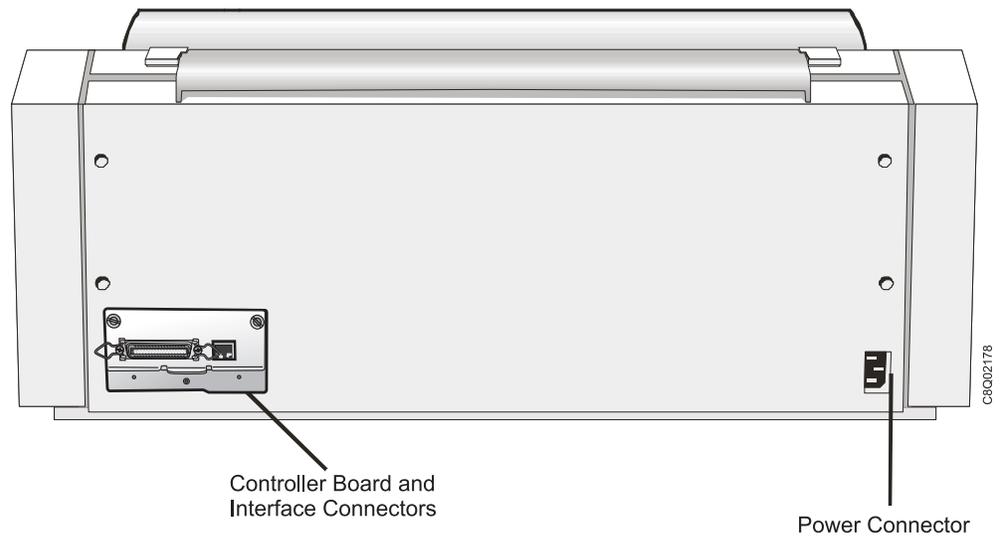


Figure 7. Rear view of the printer

Left side view

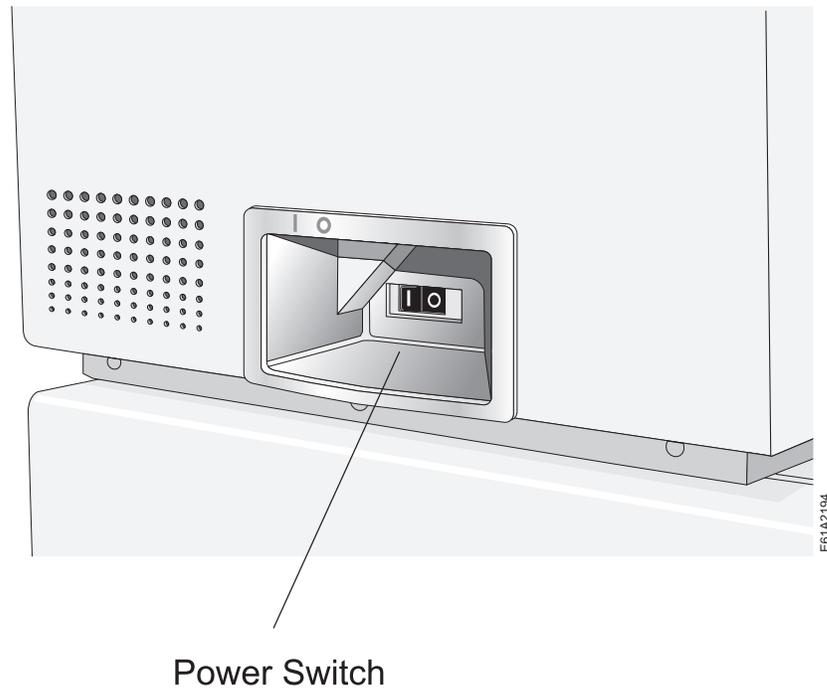


Figure 8. Power switch

Removing the shipping locks

1. Open the tractor area cover and make sure that you remove all shipping locks, including the 2 knurled shipping lock screws. Store the locks with the packing material.

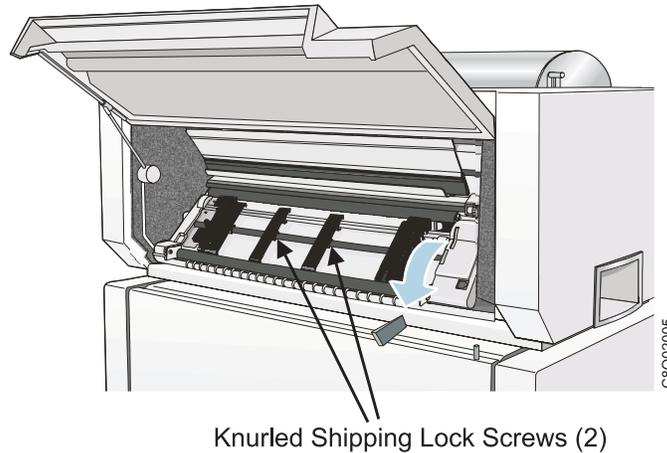


Figure 9. Opening the tractor area cover and removing the shipping locks

2. Open the upper printer cover. If there is a wire tie around the printhead, remove it.

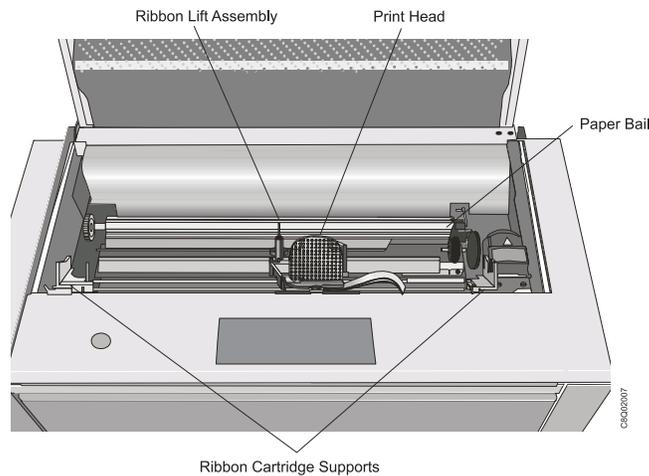


Figure 10. Opening the upper printer cover

Installing the Controller Board

The 4247 printer arrived with the Controller Board that you ordered.

You must install the Controller Board (received with the printer) into the proper slot in the back of the printer before it can be used.

Handling the Controller Board

Attention: Do not remove the Controller Board from the protective package until instructed to do so. Static electricity, though harmless to you, can damage sensitive Controller Board components. Use the information in this section to avoid damaging a Controller Board.

- Limit your movement. Your movement can create static electricity that, when released to the Controller Board, can damage the electronic components on the Controller Board. Sliding your foot across carpeting is an example of how you create unwanted static electricity.
- Handle the Controller Board only by the edges and prevent others from making direct contact with it.
- Before removing the Controller Board from the protective package, ground the package to exposed metal at the back of the printer. This will release any static charge that may have developed on the package or on your body. Hold the package against the metal for at least two seconds.
- When you are instructed, remove the Controller Board and install it directly into the Controller Board slot without setting it down. If you have removed the Controller Board from the protective package and cannot immediately insert it in the printer, place the protective package on a flat surface, and set the Controller Board on top of the protective package.

Inserting the Controller Board

Attention: Ensure that the printer is powered off before installing or removing the Controller Board.

If the Controller Board is installed while the printer is powered on, the controller will not synchronize with the printer mechanism board. Unpredictable printer behavior will result.

Perform the following steps to install the Controller Board:

1. Ensure that the printer is powered off. Installing the Controller Board with the printer power on will result in unpredictable printer behavior.
2. Use the screwdriver that came in the Controller Board box to remove the metal plate on the back of the printer by unscrewing the two screws.

Note: Save the two screws as you need them to attach the Controller Board to the back printer. Save the metal plate for reuse if the Controller Board is removed.

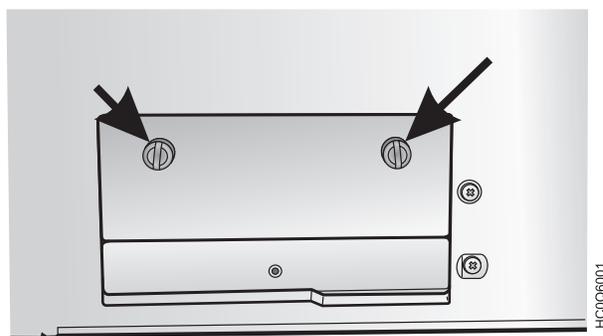


Figure 11. Removing the two screws on the metal plate.

3. Use the information under “Handling the Controller Board” on page 9 as you remove the Controller Board from its shipping box and from the protective package.

4. Align the left and right sides of the Controller Board with the guides in the printer and slide it into the slot.

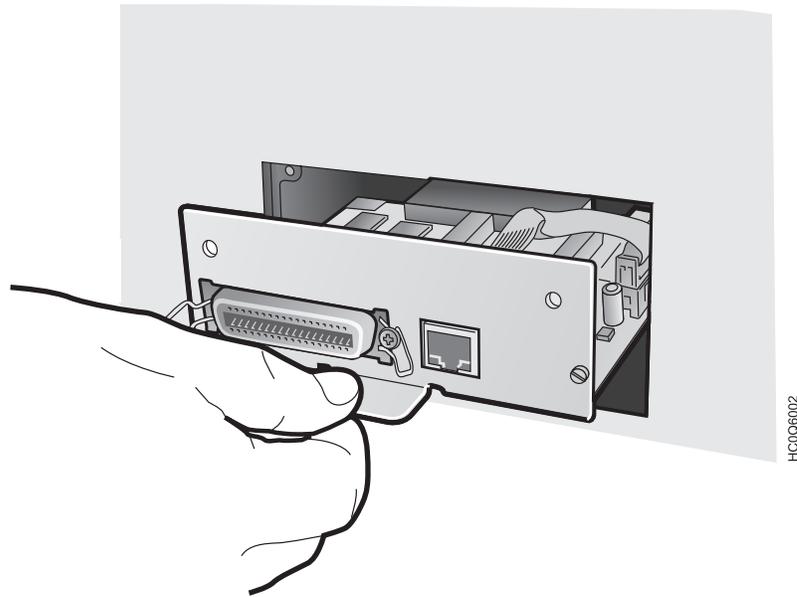


Figure 12. Sliding the board in the slot.

5. Gently push the Controller Board into the printer until it is seated in the connector inside the printer. The Controller Board is correctly seated in the printer when the Controller Board metal plate is aligned with the back profile of the slot.
6. Attach the Controller Board with the two captured screws using the screwdriver that came in the Controller Board box.

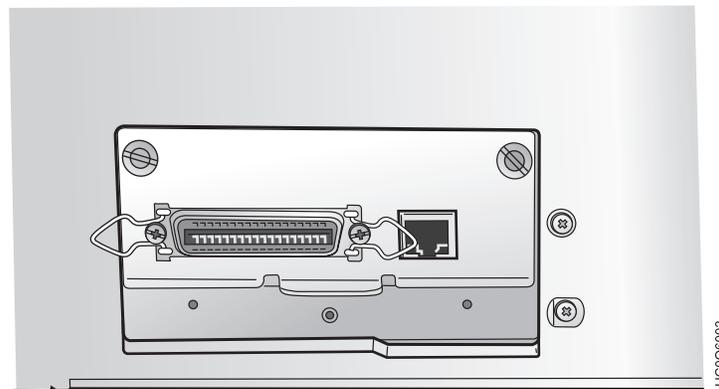


Figure 13. Attaching the Controller Board.

Installing the operator panel overlay



Figure 14. Printer Operator Panel

1. Remove the protective film from the printer operator panel display.
2. Remove the paper backing from the back of the overlay.
3. Carefully align the overlay ensuring free movement of the operator panel keys.
4. Press the overlay in place starting at the bottom, and continue working upwards until the overlay is pressed into place.

Installing the ribbon cartridge

It is recommended that you use an approved ribbon cartridge. To install the ribbon cartridge, follow these steps:

1. Remove the ribbon cartridge from the package. Locate the ribbon guide, snap arm, ribbon advance knob, and the ribbon mounting pins.
2. Turn the ribbon advance knob in the direction of the arrow to take up any slack in the ribbon. If the ribbon does not move, contact your place of ribbon purchase to replace the ribbon cartridge.

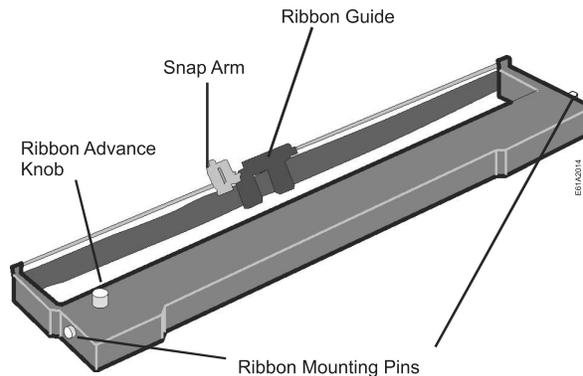


Figure 15. Ribbon cartridge

3. Open the upper printer cover using the handles on the front side of the cover.
4. Slide the print head to the center of the printer.

5. Align the cartridge pins with the locking grooves on the left and right cartridge supports.

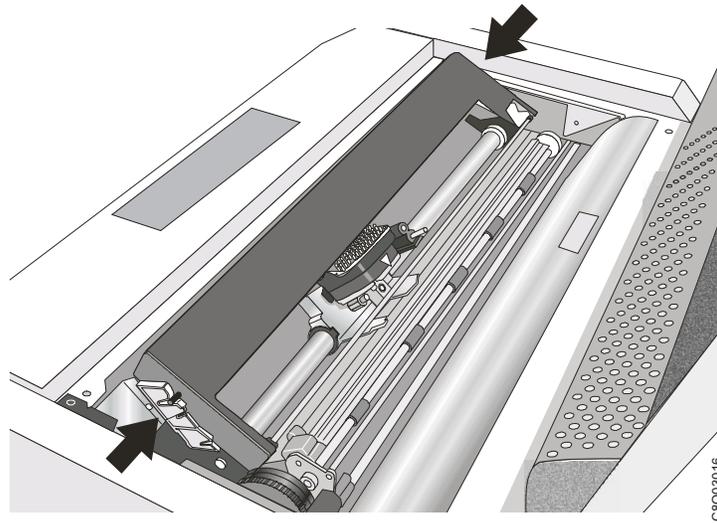


Figure 16. Aligning the cartridge pins with the locking grooves

6. Position the ribbon guide over the printhead, holding it perpendicular to the print head.

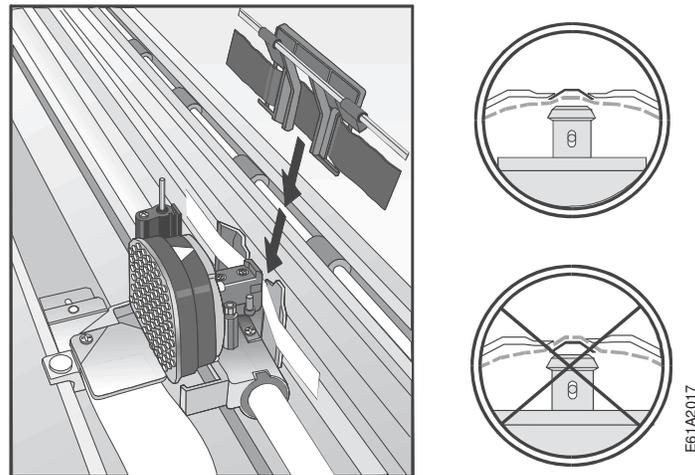


Figure 17. Positioning the ribbon guide over the printhead

7. Turn the ribbon advance knob to take up any slack in the ribbon.

8. Position the snap arm with the small lever up onto the ribbon lift assembly. Push the snap arm down onto the ribbon lift assembly until it snaps into place.

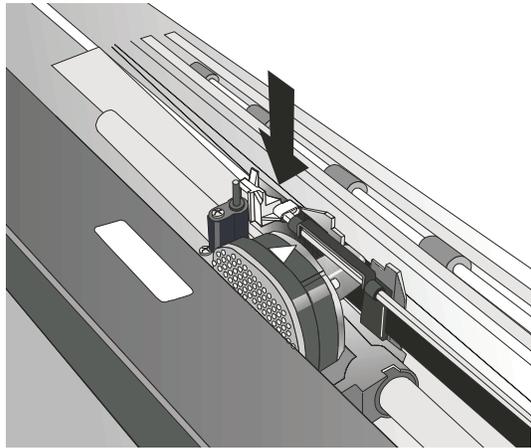


Figure 18. Positioning the snap arm

9. Align the ribbon mounting pins on the left and right side of the ribbon cartridge with the slots in the cartridge supports. Snap the ribbon cartridge down into place.

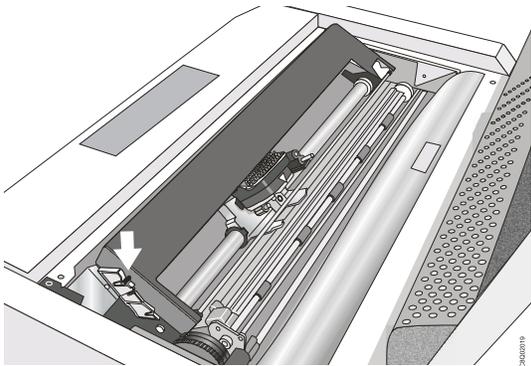


Figure 19. Aligning the ribbon mounting pins

10. Turn the ribbon advance knob again in the direction of the arrow to take up any slack in the ribbon, as you slide the printhead back and forth to ensure that the ribbon guide runs freely along the ribbon.
11. If the ribbon is not running freely, or to ensure that you have installed the ribbon cartridge correctly, ensure that:
 - a. The left and right ribbon mounting pins are securely snapped into the cartridge supports.
 - b. There are no twists or folds in the ribbon.
 - c. The ribbon is not catching on the printhead.
 - d. The ribbon moves when you turn the ribbon advance knob in the direction of the arrow. If the ribbon does not move, replace the ribbon cartridge. Contact your place of ribbon cartridge purchase if you believe that the ribbon is faulty.
12. Close the upper printer cover.

Connecting the power cord

Do not connect the power cord until the “Performing a power-receptacle safety-check” on page 3 has been successfully completed.



DANGER

<1-11> Your country may require an approved power cord and plug. Ensure that you have the correct power cord and plug. Use this cord and plug only with an approved, correctly-installed power receptacle.

“Portable power strip receptacles (temporary power taps)” on page xii, conforming to all requirements, may be used.

Connect the power cord to the outlet and printer.

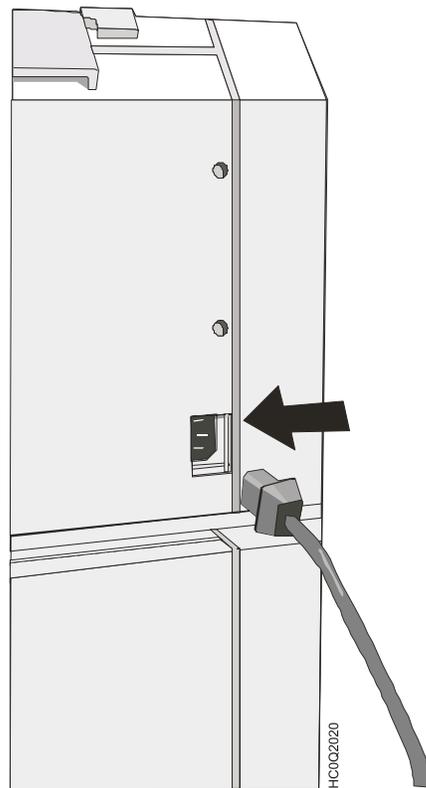


Figure 20. Connecting the power cord

Turning on the printer

1. Turn on the printer, press the power switch to the I position (ON).

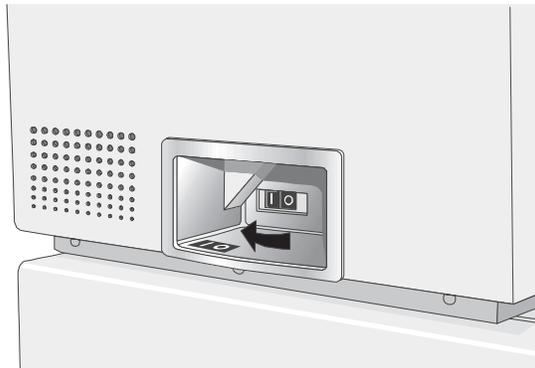


Figure 21. Turning on the printer

2. Wait until the message **4247** appears, all segments (or character elements) of the LCD on the operator panel display are lighted, and **DIAGNOSTICS IN PROGRESS** appears, then is replaced by the **READY** message.

READY		<A>
XXXX	FRONT	

Where: XXXX indicates the attachment type.

Attention: If, for any reason, the Controller Board was not correctly installed in the printer, the printer will not work and the following audio/visual symptoms will occur:

- The buzzer sounds continuously
- The Operator Panel display is partially filled with solid black boxes
- The Operator Panel LEDs are all lit.

If this is the case, power off the printer, re-seat the Controller Board, and power the printer on again.

Note: If the printer displays an error message, see “Status codes and recovery actions” on page 156. Follow the instructions for the Status Code shown on the display panel.

Changing the display language (from the default, English)

The printer is delivered with English as the default language. Follow this procedure to change the language in which messages and menu items will appear in the operator panel display.

1. Press **MENU** to enter configuration.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays:

CONFIGURATION MENU
Display Language

3. Press **ENTER** to display the current value.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the language you want is displayed.
5. Press **ENTER**. An asterisk (*) will be displayed in front of the selected value.

6. Press **RETURN** to return to the **Configuration Menu**.
7. Press **START**. The printer displays:

```
PRESS ENTER TO SAVE
Press Start Not To Save
```

8. Choose between one of these options:
 - If you want to use the selected display language as the printer default for this session only (the printer will use the existing defaults the next time it is turned on), press **Start**. The printer will exit the menu and display **READY**.
 - If you want to keep the selected display language as the printer default, press **ENTER**. The printer displays:

```
SAVE CURRENT VALUES
Custom Set A
```

9. Press **ENTER**.
10. Press **START** again. The printer will exit the menu and display **READY**.

Loading fanfold paper

Before starting this procedure, ensure you have single-part, continuous forms that are at least 210 mm (8.27 in.) wide. You need at least this size forms to create an offline printout, which will test printer operation.

1. Open the tractor area cover.

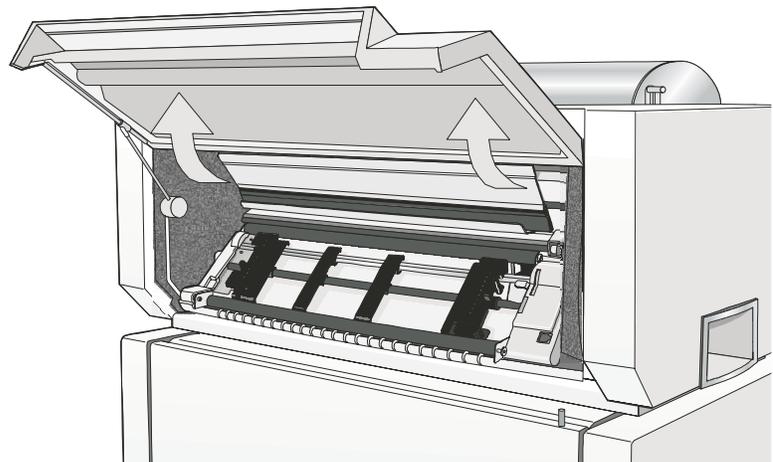


Figure 22. Opening the tractor area cover

2. Unlock the tractors by moving the sprocket levers up. Slide the left tractor to the left.



Figure 23. Unlocking the tractors

3. Space the paper guides along the tractor bar. Open the sprocket covers of the left and right tractors.

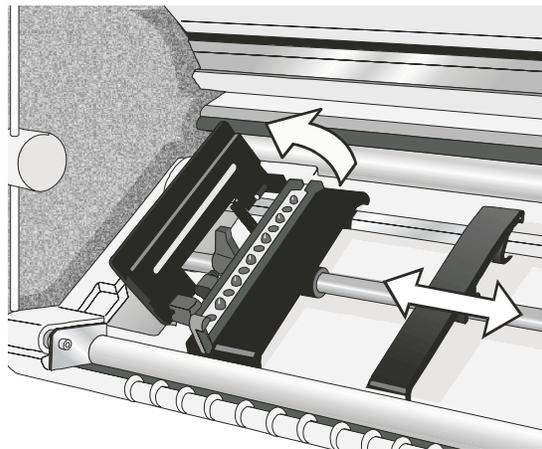


Figure 24. Spacing the paper guides and opening the sprocket covers

4. Put the left sprocket holes of the form over the left tractor pins. Close the left tractor sprocket cover.

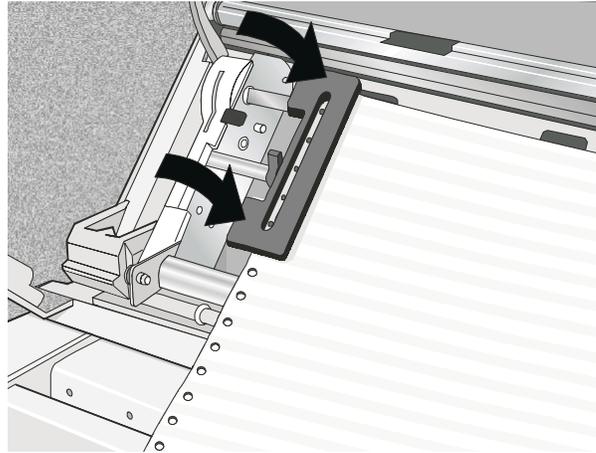


Figure 25. Placing the form on the tractor pins

5. Move the right tractor until the right sprocket holes of the form fit on the right tractor pins. Ensure that the forms go under the forms jam sensor and that the forms are straight.

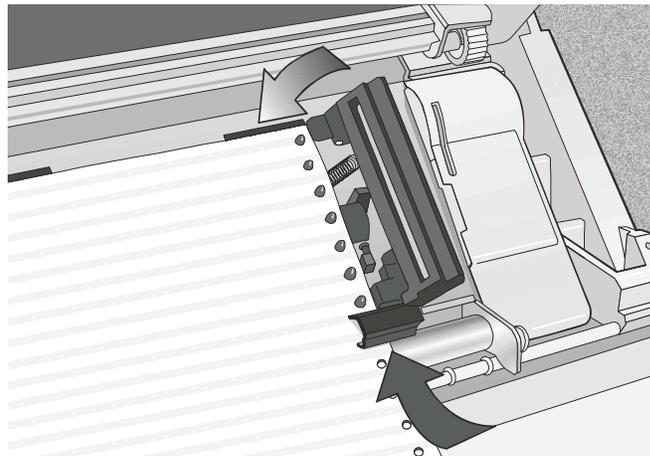


Figure 26. Placing the forms on the right tractor pins

6. Close the right tractor sprocket cover.

7. To position the paper for the first column printing, move both tractors aligning the left edge of the form with the 11th spacer on the printer base.

Note: Aligning the left-hand edge of the paper past the 22nd spacer on the printer cabinet will cause the paper to be misaligned with the Paper Load Sensor resulting in a '001 End of Forms' error.

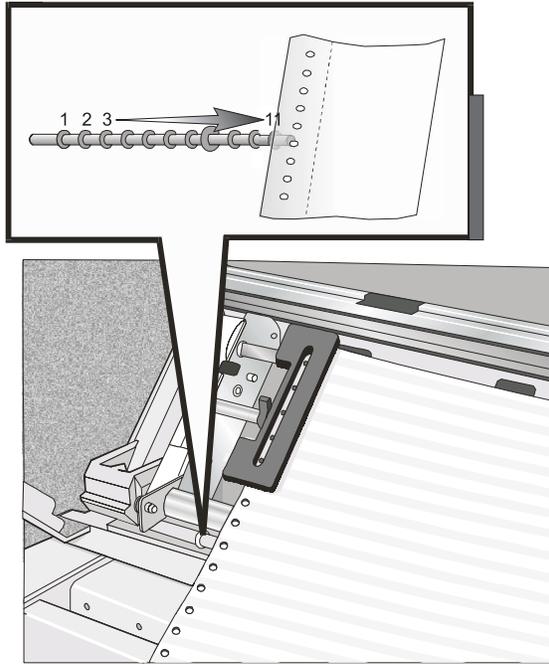


Figure 27. Aligning the form

8. Position the right tractor so that the pins on both tractors are centered in the pin holes on both edges of the form. The form should not be over tensioned, nor should there be slack. The form should lie flat and even between the two tractors.
9. While holding the left and the right tractors in place, lock both locking levers.
10. Close the tractor area cover.
11. Press **STOP** to make the printer **NOT READY**.
12. Press **LOAD/EJECT** to feed the forms.

Printing the Quick Reference as a test page

The **Quick Reference** print test familiarizes you with the operator panel and configuration menu while providing a check for printer operation and print quality.

To perform the test:

1. Ensure that the printer is offline. If the printer is **READY**, press **STOP** to make the printer **NOT READY**.
2. Press **TEST**.
3. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays:

OPERATOR PRINT TESTS
Quick Reference

4. Press **ENTER** or **START** to print this test.
The **READY** indicator comes on and printing begins.
Press **STOP** if you want stop the test before it completes printing.
5. Wait for the printer to stop printing and the **READY** indicator to go off.
6. Press **FORM FEED** until you can remove the printout. The printout should be clear and readable.

Installing the optional second tractor

Your printer comes with one forms tractor already installed on the printer. When only this tractor is installed, the settings for the front paper path apply to the paper loaded on this tractor. If instead the second (optional) tractor is installed in the printer, the settings for the front path apply to the paper loaded with the upper tractor, whereas the default tractor becomes the rear tractor.

1. Open the tractor area cover.

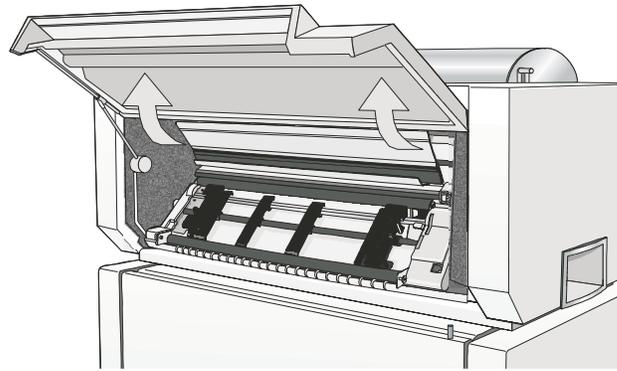


Figure 28. Opening the tractor area cover

2. Unpack the second tractor.



Figure 29. Unpacking the second tractor

3. Align the hooks on both sides of the second tractor with the pins on the first tractor. Push the second tractor on the pins until it is fully engaged.

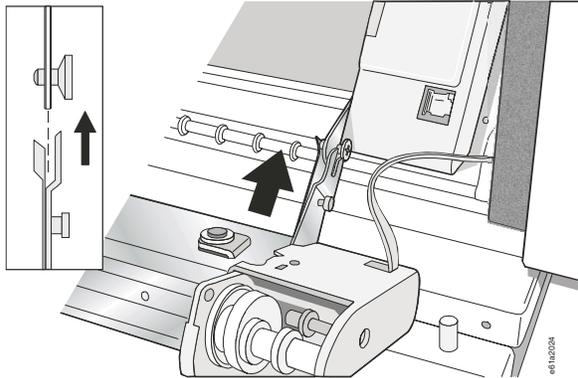


Figure 30. Installing the second tractor

4. Connect the second tractor to the first.

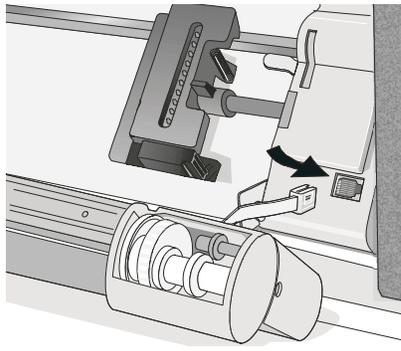


Figure 31. Connecting the second tractor to the first

5. Rotate the tractor gear protection cover downwards to free the gear.

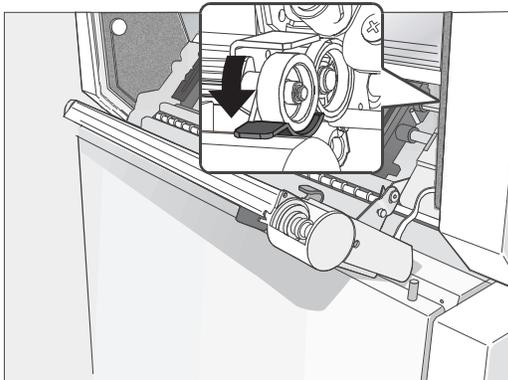


Figure 32. Rotating the tractor gear protection cover downwards

6. Rotate the second tractor into the closed operating position.

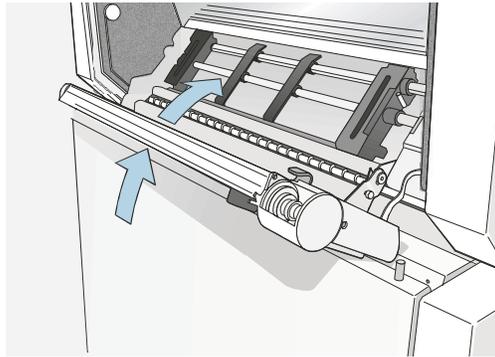


Figure 33. Rotating the second tractor into the closed operating position

7. To load paper onto the first tractor when the second tractor is installed, rotate the second tractor out and insert paper between the two tractors. (See “Loading fanfold paper” on page 17 for paper loading procedures.)

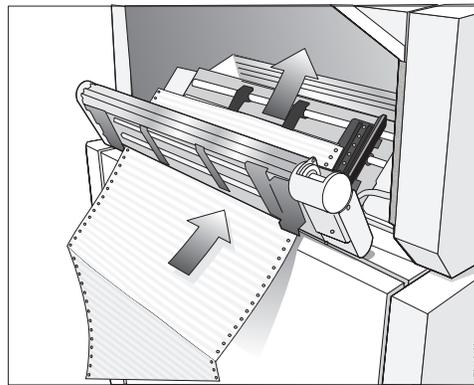


Figure 34. Loading paper into the first tractor

Removing the optional second tractor

If you need to remove the second optional push tractor, turn the printer off.

1. Disconnect the connector cable and press on the push buttons on either side to disengage the tractor. Then pull the tractor off.

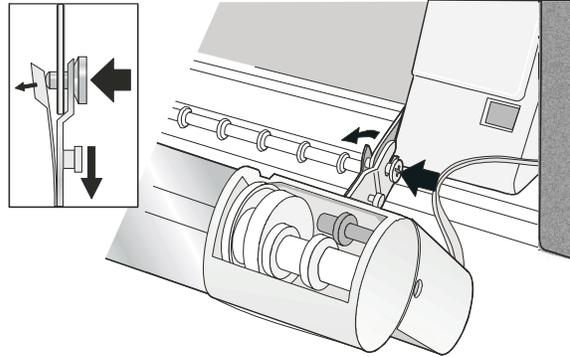


Figure 35. Disengaging the tractor



CAUTION:

<2-53> If the second tractor unit is not installed, make sure the gear protector cover is closed. Do not touch inside the printer or insert any object into the gears.

2. Close the tractor gear protection cover.

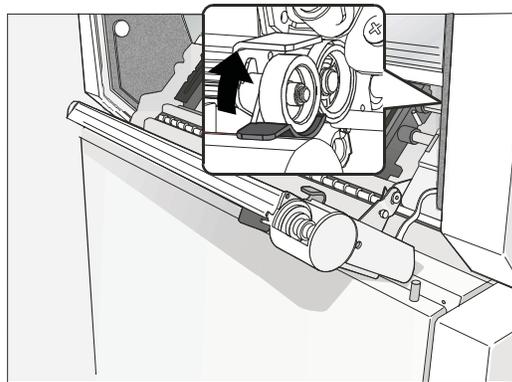


Figure 36. Closing the tractor gear protection cover

Printing a configuration sheet

You have just completed a setup and checkout of the printer.

For the instructions on attaching your 4247 printer to your computer and configuring the 4247 printer for your printing applications, please see “Attaching the 4247 Printer to your computer.”

We recommend that you now print your printer configuration defaults. Save this printout for future reference. You can create a printout of the printer configuration by following these steps:

1. Ensure the printer is offline. If the printer is in the **READY** state, press **STOP** to put the printer into the **NOT READY** state.
2. Press **TEST**.
3. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays:

OPERATOR PRINT TESTS Print Custom Sets

4. Press **ENTER** or **START** to print this test. See “Print Custom Sets” on page 145 for more information about this printout.
5. To exit **OPERATOR PRINT TESTS**, press **RETURN** to make the printer **NOT READY** or **CANCEL/PRINT** to make the printer **READY**.

Attaching the 4247 Printer to your computer

This printer can be connected to your host computer with the interfaces available on the Controller Board you have found in the printer box and installed on the rear of the printer.

There are three types of Controller Boards:


1. Controller Board with a bidirectional IEEE1284 parallel interface, Serial RS232/C 9-pin interface and USB 2.0 interface.
2. Controller Board with a bidirectional IEEE1284 parallel interface and ASCII Ethernet 10/100 BaseT LAN interface.
3. Controller Board with a bidirectional IEEE1284 parallel interface and ASCII-IPDS Ethernet 10/100 BaseT LAN interface.



DANGER

<1-14> Switch off printer power and unplug the printer power cord before connecting or disconnecting a communication port, a teleport, or other attachment connector.

Insert the host computer cable(s) into the back of the printer as shown below:

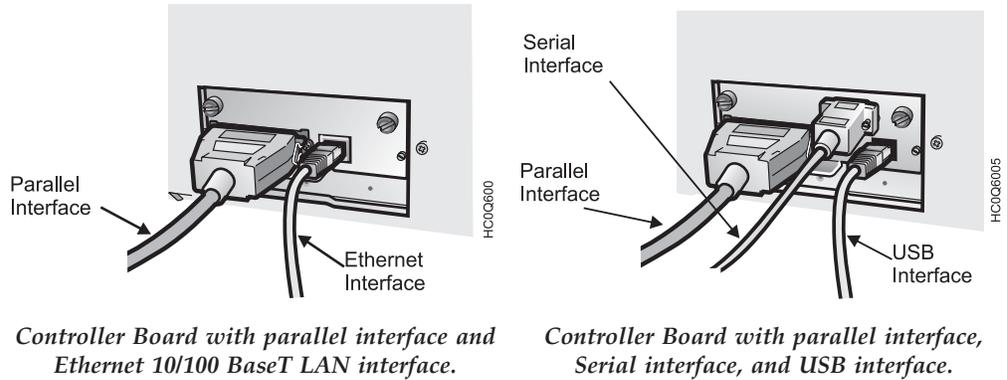

Software driver selection

See Appendix C, “Printer driver support,” on page 179 for information about selecting printer drivers.

Completing printer setup

Your 4247 Printer is now ready to use with the configuration parameters set to manufacturing defaults. The exception is that you have selected new defaults for display language.

To change printer configuration parameters, see:

- Chapter 2, “Understanding the operator panel,” on page 27 for information on operating the printer,
- Chapter 3, “Checking and changing configuration parameter values,” on page 37 for configuration information,

Chapter 2. Understanding the operator panel

Status Indicators	27	ENTER function	31
READY	27	RETURN	32
PROCESSING	28	RETURN function	32
ATTENTION	28	PARK/PATH	32
Display panel	28	PARK function	32
Audible alarm	28	PATH function	32
Custom set In-Use indicator	29	LINE FEED	33
Function keys	29	LOAD/EJECT	33
MENU	30	FORM FEED	34
SCROLL/MICRO↑ or SCROLL/MICRO↓	30	SET TOP OF FORM	34
Adjusting forms	31	START	35
Scrolling through categories, parameters, values, and tests.	31	STOP	35
ENTER	31	CANCEL PRINT	36
		TEST	36

This chapter describes the function of the operator panel. The operator panel contains 3 status indicators, a 2-line by 24-character display panel, 14 printer function keys, and an audible alarm.

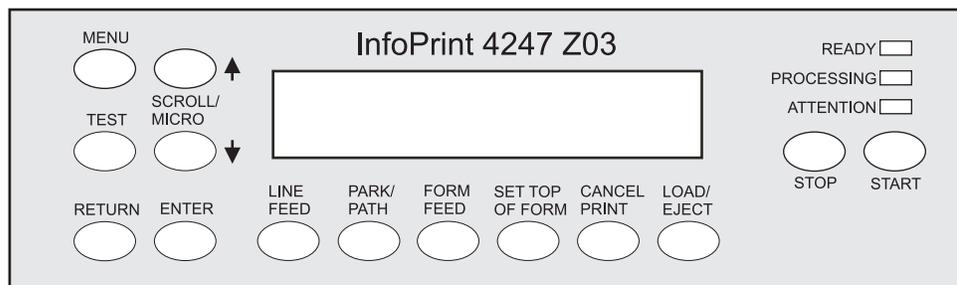


Figure 37. 4247 Z03 Printer operator panel

Status Indicators

The following status indicators appear on the operator panel:

- **READY**
- **PROCESSING**
- **ATTENTION**

You can determine printer status by checking these indicators.

READY

If the **READY** indicator is lighted, the printer is *ready* to print. If **READY** is not lighted, the printer is *not ready* to print. The printer can receive data when this indicator is not lighted, but no data can be printed.

The **READY** indicator is lighted because of one of the following conditions:

- Successful power-on sequence
- After pressing **START**, if the indicator was off because of one of the following conditions:
 - An error condition (if the error has been corrected)

- An intervention required condition (if the error has been corrected)
- After pressing **STOP**
- After pressing **ENTER** or **START** to run a test in the Operator Print Tests menu
- After a successful partial reset to *ready* after pressing **CANCEL PRINT** to exit the Operator Print Tests

The **READY** indicator is not lighted because of one of the following conditions:

- After pressing **STOP**
- After detection of an intervention required condition
- After detection of a printer error
- After pressing **MENU** to enter the Configuration Menu when no print job is in progress
- After pressing **LOAD/EJECT** to perform an eject to tear off position when Front Push or Rear Push is selected.

PROCESSING

If lighted, the printer is printing or processing data. If blinking, the printer buffer contains data that cannot be printed immediately. If not lighted, there is no data to process and no data in the print buffer.

ATTENTION

If blinking, the printer requires operator intervention (for example, to add forms or to clear a forms jam). The type of intervention needed appears on the display panel. If not lighted, the printer does not require immediate attention.

Display panel

The display panel is a 2-line by 24-character liquid crystal display (LCD) that displays printer status messages, the print test menu, and the configuration menu categories, parameters, and values. Use this display panel and the printer function keys to scroll through and select Configuration Menu items and Operator Print Tests. You can set this display so the messages appear in one of the following languages:

- 000 English (default)
- 001 Deutsche
- 002 Français
- 003 Italiano
- 004 Español
- 005 Nederlands
- 006 Dansk
- 007 Português
- 008 Norsk
- 009 Svenska
- 010 Suomi
- 011 Polski

Audible alarm

If you do not disable the audible alarm, it beeps if any of the following conditions occur:

- Immediate intervention is required
- A printer error condition exists

- The printer receives a command from the host to turn on the alarm
- An invalid key press is attempted
- The **SET TOP OF FORM** key is pressed

To turn a beeping alarm off, press **STOP**. You can disable the audible alarm. See “Alarm Control” on page 68 for instructions.

Note: Pressing **SET TOP OF FORM** and some attention conditions sound the alarm, even if it is disabled.

Custom set In-Use indicator

This indicator shows the parameter custom set that is currently being used by the printer. The indicator is located in the top right corner of the operator panel. A custom set is a set of configuration values that have been defined at the operator panel and saved under a letter ID. When the custom set identified by this ID is selected from the operator panel, these configuration values are used by the printer.

NOT READY	<X>
-----------	-----

The current custom set in use is displayed in parentheses <X>. Where <X> can be:

- A** (Custom Set A in use)
- B** (Custom Set B in use)
- C** (Custom Set C in use)
- D** (Custom Set D in use).
- E** (Custom Set E in use)
- F** (Custom Set F in use)
- G** (Custom Set G in use)
- H** (Custom Set H in use).

If a change was made in the configuration menu and not saved in a custom set, then the change is temporary and a **blank < >** is displayed in the parentheses. For more information on Custom Sets, see Chapter 4, “Configuration storage,” on page 49.

Function keys

There are 14 keys available on the operator panel for performing printer functions. These keys perform general printer functions (for example, adjusting forms) and are used to scroll through and select items in the Configuration Menu and Operator Print Tests menu.

The following section describes each of the printer function keys on the operator panel.

MENU



Use the Menu function key to enter the Configuration Menu. This function key is valid when the printer is *not ready* or the printer is *ready* and no job is in progress. After you enter the Configuration Menu, paper movement functions are not available.

Press **MENU** to enter the Configuration Menu.

The printer displays:

```
CONFIGURATION MENU
Configuration Storage
```

Note: If a print job is in progress (the printer is printing or the **PROCESSING** indicator is on), the printer displays:

```
009 INVALID KEY PRESS
PRESS STOP FIRST
```

In this case, you can press **STOP** first and then enter the Menu. However, it is not recommended that you change the Configuration Parameter Values while a print job is in progress.

The configuration menu can be locked to prevent an unauthorized user from changing parameter values. When the configuration menu is locked, pressing the **MENU** key only allows recall of Custom Set Values. The Printer Adjustments in the Operator Print Tests Menu are also disabled.

If the **MENU** is locked, the printer displays:

```
097 FUNCTION DISABLED
MENU LOCKED
```

For more information on the Menu Lock function, see your system programmer or the *4247 Printer Model X03/Z03: Programmer Manual*.

For more information on configuration parameters and values, see “Checking and changing parameter values” on page 38.

SCROLL/MICRO↑ or SCROLL/MICRO↓



Use **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to perform the following functions:

- Adjust forms upward or downward when the printer is *not ready*.
- Scroll through the Configuration Menu categories, parameters, and values.
- Scroll through the Operator Print Tests menu items.

Adjusting forms

Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ to move the form 0.176 mm (1/144 in.) in the direction of the arrow each time you press the key. If you continue to hold down the **SCROLL/MICRO**↑ key, the forms move continuously until you release the key.

When the printer is at the top of the forms and the **SCROLL/MICRO** keys are used, the new forms position is now the top of forms.

The **SCROLL/MICRO**↑ and **SCROLL/MICRO**↓ keys replace the forms advance knob found on other printer products.

Note: If you use these keys when the **PROCESSING** indicator is blinking, the top of form position could become misaligned.

Scrolling through categories, parameters, values, and tests

The scrolling functions are available only when the Configuration Menu or Test Menu is displayed.

Pressing **SCROLL/MICRO**↑ when the Configuration Menu is displayed changes the second line of the display to show the previous configuration category, parameter, or value. Pressing **SCROLL/MICRO**↓ when the Configuration Menu is displayed changes the second line of the display to show the next configuration category, parameter, or value.

Pressing **SCROLL/MICRO**↑ when the Test Menu is displayed changes the second line of the display to show the previous test name. Pressing **SCROLL/MICRO**↓ when the Test Menu is displayed changes the second line of the display to show the next test name.

The scroll keys also enable the selection of numeric values. The list of numeric values starts with the lowest value. When a numeric value is to be entered, use **SCROLL/MICRO**↑ to see the next lower value in the range and **SCROLL/MICRO**↓ to see the next higher value. The values are shown on the second line of the display panel. When the value you wish to select appears, press **ENTER**.

The scrolling functions are also used during some of the Operator Print Tests. See Chapter 17, "Using the Operator Print Tests," on page 143 for more information.

ENTER



ENTER function

The **ENTER** function is available when the Configuration Menu or Operator Print Tests Menu is displayed.

Pressing **ENTER** selects the displayed option.

The Enter function is also used during some of the tests.

RETURN



RETURN function

Pressing **RETURN** in the Configuration Menu returns to the previous level of the menu, unless the printer already displays:

CONFIGURATION MENU Configuration Storage

If Configuration Menu is displayed, the printer exits the menu and becomes *not ready*.

Note: If you have made configuration changes and have not saved them in a Custom Set, the display will prompt you to save the changes. If you are in the Operator Print Tests Menu and a test is not running, pressing **RETURN** will exit the Test Menu and make the printer *not ready*.

PARK/PATH



PARK function

Pressing this key causes the printer to enter the Park function in either the *ready* and *not ready* state. The continuous forms will back up (reverse the process direction of) the forms in the forms path.

If continuous forms are currently in the printer and the top of the form is beyond the print area, press **PARK/PATH**. The forms will be ejected for tearoff and the printer will display:

091 FANFOLD PARK TEAR OUTPUT PRESS PARK
--

If special forms are currently in the printer that cannot be moved backwards (for example, labeled continuous forms) the printer displays:

092 FANFOLD PARK TEAR INPUT PRESS EJECT
--

Perform the action requested on the operator panel display. The printer is then ready for the paper path selection.

PATH function

When no forms are in the current path and the printer is in the *not ready* state, pressing **PARK/PATH** allows the selection of the different forms paths available on the printer. When the desired path is displayed, press **START**. The forms path displayed becomes the active forms path and the printer becomes *ready*. You can also press **LOAD/EJECT** or **FORM FEED** for continuous forms to select the active forms path.

The forms path selected by **PARK/PATH** also becomes the current value for Paper Source in the Printer Setup category. See “Paper Source” on page 107.

LINE FEED



This function is valid only when the printer is *not ready*.

Press **LINE FEED** to cause the printer to advance the forms one print line, based on the current LPI setting. If you hold **LINE FEED** more than four seconds, the forms move continuously until you release the key.

Similar to the forms advance knob on other printer products, the **LINE FEED** key allows coarse vertical movement of forms. This key does not function as an “Index” key, which may be found on other printer products.

Note: If you use this key when the **PROCESSING** indicator is blinking, the top of form position could become misaligned.

LOAD/EJECT



The **LOAD/EJECT** function depends on what active form path you have selected. This section describes the function for each of the paper paths.

The **LOAD/EJECT** key performs the following functions:

- Automatically loads forms
After the forms are loaded under the sensor and onto the tractors at the bottom of the forms device press **LOAD/EJECT** to automatically load the forms to the top of form position.
- Moves forms to the tear-off position
Do not press **STOP** first.
If a Form Feed is done, either by data stream command or by pressing **FORM FEED**, prior to pressing **LOAD/EJECT**, the forms will be positioned for you to tear off the forms at a perforation.

Note:

If pressing **LOAD/EJECT** did not align the forms perforation with the tear bar, check the following:

1. Assure that a Form Feed has been done just prior to pressing **LOAD/EJECT**.
2. Verify that the Tear Position value for the path you are using (Front or Rear) in the Printer Adjustments section of the Configuration Menu has been set correctly. Often this value is the negative of the Paper Load Position value. Adjust the Tear Position to give the best alignment of the forms perforation to the tear bar edge. Each path has its own set of adjustment values. When you change these values, ensure that you are setting the values for the desired path.

If you specify Immediate Eject for Continuous Forms Eject Mode parameter (default value) in the Printer Setup category, press **LOAD/EJECT** to immediately make the printer *not ready*. The printer displays:

```
003 FORMS EJECTED
PRESS LOAD
```

and advances the form so that you can tear off the form at the perforation and remove it from the printer.

If you specify Delayed Eject for the Continuous Forms Eject Mode parameter in the Printer Setup category, press **LOAD/EJECT** to cause the printer to display:

```
093 EJECT PENDING
```

and beep the alarm. When the end of the form is reached, the printer becomes *not ready*, displays:

```
003 FORMS EJECTED
PRESS LOAD
```

and advances the form so that you can tear off the form at the perforation and remove it from the printer.

Pressing the key a second time moves the next form to be printed back to the previous print position and makes the printer *ready*.

Refer to “Continuous Forms Eject Mode” on page 114 for more information on changing Continuous Forms Eject mode.

- Ejects forms for viewing

If a Form Feed is not done prior to pressing **LOAD/EJECT**, the forms will be positioned for you to view them to examine the printing

FORM FEED



This key advances the forms so that the next form is at the top of form position. The Form Feed function is available when the printer is *not ready*.

- If you interrupt a print job by pressing **STOP**, pressing **FORM FEED**, and then pressing **START** (when you are ready to resume the job), the printer continues to print on the next form at the place where printing was interrupted on the previous form.
- If **FORM FEED** is pressed during load operation, the **FORM FEED** functions as a **LOAD/EJECT** and performs an automatic load.
- The printer does not always have to be *not ready* before pressing **FORM FEED**. See “Form Feed Mode” on page 110 for more information.

SET TOP OF FORM



This should only be used when printing occurred and no Top-of-Forms commands have been passed to the printer (such as Form Feed or Printer initialization).

The Set Top of Form function is available only when the printer is *not ready*, and the paper is loaded to the print line. This key can be used only for the continuous forms paper sources.

Press **SET TOP OF FORM** to set the top of form position for continuous paper sources only. The alarm beeps and the printer displays:

TOP OF FORM SET

While you hold down the **SET TOP OF FORM** key.

If preprinted forms are being used, use Paper Load Positioning (see Chapter 9, "Printer Adjustments," on page 119) instead of Top-of-Form.

START



Press **START** to perform the following functions:

- Make the printer *ready* and cause the **READY** message to appear in the operator panel display.
- Exit the Configuration Menu and make the printer *ready*. If a partial reset is required, it is performed to put configuration changes into effect before the printer becomes *ready*.

Note: If you have made configuration changes and have not saved them in a Custom Set, the display will prompt you to save the changes.

- Start the printer printing if no error condition appears on the display and if the computer is sending data to be printed.
- Begin a test from the Operator Print Tests menu.

STOP



If the printer is in a *ready* state, press **STOP** to:

- Make the printer *not ready* and cause the **READY** message to disappear from the operator panel display
- Stop printing as soon as possible without losing print data
- Stop a test if the printer is in test mode
- Stop the printer alarm from beeping
- Allow you to use the other printer function keys
- Cause the printer to display:

NOT READY <X>

(Or cause the current test menu to display if the printer is in Operator Print Tests mode)

If an error condition appears on the operator panel display, press **STOP** to:

- Clear the error message from the display
- Stop the printer alarm from beeping.

CANCEL PRINT



When this key is pressed while the printer is active and online, the attachment sends a “cancel request” to the host the printer displays:

```
059 CANCEL PRINT ACTIVE
```

For *any attachment option*, the **CANCEL PRINT** button clears all print buffers. This function is valid only when the printer is *not ready*.

CANCEL PRINT is also active in Operator Print Tests. If **CANCEL PRINT** is pressed while in the tests, the printer stops any test in process, exits the test mode, performs a partial reset, and becomes *ready*.

TEST



Press **TEST** to enter the Operator Print Tests menu. The Test function is valid only when the printer is *not ready*.

There are several tests available. After you press **TEST**, the printer displays:

```
OPERATOR PRINT TESTS  
Quick Reference
```

Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to display the other available tests.

Refer to Chapter 17, “Using the Operator Print Tests,” on page 143 on selecting and running tests.

Chapter 3. Checking and changing configuration parameter values

Printing configuration defaults	37	ASCII Configuration	42
Checking and changing parameter values	38	Printer setup	45
Exiting the configuration menu.	39	Printer adjustment	46
Exiting using START	39	Power on reset	47
Exiting using RETURN	39	Display Language	47
Locking printer configuration menu	40	Vital Product Data	47
Configuration categories	40	Quiet Print	48
Configuration storage	40	Hex Print	48
Attachment	41	Quit from Menu.	48
IPDS Configuration.	41		

This chapter gives you brief descriptions and procedures for checking or changing the Configuration Parameter Values. Parameter values are settings the printer recognizes and uses to process print data. These values can be set using the operator panel. They are grouped together into categories of values and are accessed on the operator panel by these categories. These categories are available on the Configuration Menu:

- Configuration Storage
- Attachment
- IPDS Configuration
- ASCII Configuration
- Printer Setup
- Printer Adjustments
- Power On Reset
- Display Language
- Vital Product Data
- Quiet Print
- Hex Print
- Quit From Menu

You can use the Configuration Parameter Values set at the manufacturer, or you can change them. Instructions for checking and changing the Parameter Values for each of these Configuration Categories are described in this section.

Notes:

1. The computer program can override Parameter Values that you select from the operator panel. The values that the computer program *cannot* override are listed in “Configuration categories” on page 40.
2. If a category or parameter that is not valid for your printer application is displayed, you should ignore it; it will not harm the printer or affect its operation.
3. We recommend that you print your custom sets for reference. See “Printer Configuration” on page 144 for information.

Printing configuration defaults

We recommend that you print your configuration values and save this printout for future reference. See “Printer Configuration” on page 144 for information on printing your printer configuration values.

Checking and changing parameter values

Checking and changing Configuration Parameter Values is done in the Configuration Menu, which is entered with the **MENU** key. The Configuration Menu is divided into three levels:

- Category
- Parameter
- Value

Note: Do not change Parameter Values during a print job; data may be lost.

Press **MENU** to enter the Configuration Menu.

```
CONFIGURATION MENU
Configuration Storage
```

The first category in the Configuration Menu is listed on the second line of the display. Use **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to scroll through the Categories until the category you want is displayed. Press **ENTER** to display the first Parameter in the Category you select. Use **SCROLL/MICRO↑** or **Scroll↓** to scroll through the Parameters until the parameter you want to check or change is displayed. Press **ENTER** to display the current value for the selected Parameter (indicated by an asterisk [*]).

Use **SCROLL/MICRO↑** and **SCROLL/MICRO↓** to scroll through the other available Values until the value you want is displayed. Press **ENTER** to select this new value.

When you change the values and do not save them in a custom set, the printer retains the values until one of the following occurs:

- You Turn off the printer
- You change the values again

Unless you save the values in a custom set, the values you changed are lost when you Turn off the printer. The next time you Turn on the printer, the values you saved previously in the Power-On Custom Set, are the values the printer uses.

See Chapter 4, "Configuration storage," on page 49 for information about saving and recalling parameter values in custom sets.

Configuration changes do not take effect until the printer completes printing the buffered data (data the printer has in its storage areas).

If you change a parameter (or several parameters) and then decide you do not want to keep your changes, you can return to the previous value settings by selecting Quit from Menu from the Configuration Menu. The printer displays

```
Quit from Menu
Restore Previous Values
```

Press **ENTER** to restore the previous values, exit the Configuration Menu, and make the printer *not ready*. See Chapter 15, "Quit From Menu," on page 137 for more information about restoring previous values.

Exiting the configuration menu

You may quickly exit the Configuration Menu and make the printer *ready* by pressing **START**. You may also exit the menu and make the printer *not ready* using the **RETURN** key. These two methods maintain the changes you have made to the configuration.

Note: If you wish to cancel your changes, you may Quit from the menu; see Chapter 15, “Quit From Menu,” on page 137.

Exiting using **START**

If you did not make any configuration changes or you stored your changes in a custom set, press **START** and the printer will exit the menu and become *ready*.

If you made configuration changes and did not store them in a custom set, to exit by using **START**, use the following steps:

1. Press **START** from any level of the menu.

The printer displays

```
Press ENTER to Save
Press START to Not Save
```

2. If you do not want to store your changes (they will be lost when the printer is turned off), press **START** again and the printer will exit the menu and become *ready*.
3. To store your changes in a custom set, press **ENTER**.
4. The printer will go to the Value level of the Configuration Storage Category in the menu and display

```
Save Current Values
Custom Set A
```

5. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired custom set name is displayed.
6. Press **ENTER** to store the current parameter values (see Chapter 4, “Configuration storage,” on page 49 for more details).
7. Press **START** again.

The printer will exit the menu and become *ready*.

See “Configuration categories” on page 40 for the parameters you can change and the manufacturing values.

Exiting using **RETURN**

If you did not make any configuration changes or you stored your changes in a custom set, press **RETURN** and the printer will exit the menu and become *not ready*.

If you made configuration changes and did not store them in a custom set, to exit by using **RETURN** use the following steps:

1. If CONFIGURATION MENU is not on the first line of the display, press **RETURN**.
2. Press **RETURN** again.

The printer displays

Press ENTER to Save Press RETURN to Not Save

- If you do not want to store your changes (they will be lost when you turn off the printer), press **RETURN** again and the printer will exit the menu and become *not ready*.
- To store your changes in a custom set, press **ENTER**.
- The printer will go to the Value level of the Configuration Storage Category in the menu and display

Save Current Values Custom Set A

- Press **SCROLL/MICRO** or **SCROLL/MICRO** until the desired custom set name is displayed.
- Press **ENTER** to store the current parameter values (see Chapter 4, "Configuration storage," on page 49 for more details).
- Press **RETURN** three times to back out of the menu.
The printer will exit the menu and become *not ready*.

See "Configuration categories" for the parameters you can change and the manufacturing values.

Locking printer configuration menu

The configuration menu can be locked to prevent an unauthorized user from changing parameter values. When the configuration menu is locked, you can recall saved custom sets (A through H), but cannot change configuration parameter values. The Printer Adjustments in the Operator Print Tests Menu are also disabled.

To lock or unlock the printer configuration:

- Press **STOP**.
- Press and hold **TEST** while pressing **START**. The printer displays

PRESS STOP-->NOT READY

Note: Do not press **STOP**.

- Press **SET TOP OF FORM**.

Configuration categories

This section lists all the selectable values available and the manufacturing defaults for the parameters in each configuration category.

Configuration storage

Table 1 lists the parameters available for the Configuration Storage Category. Refer to Chapter 4, "Configuration storage," on page 49 for detailed information on setting these parameters.

Table 1. Configuration storage category

Parameters	Values	Default
Save Current Values	Custom Set A-H	N/A

Table 1. Configuration storage category (continued)

Parameters	Values	Default
Recall Custom Set	Custom Set A-H	N/A
Power-On Custom Set	Last Used Custom Set A-H	Last Used
Power-On Paper Source	Front Rear Last Used	Front
Recall Factory Defaults	Yes	N/A

Note: Use Recall Factory Defaults to set all the parameters to the manufacturing default values. See “Recall factory defaults” on page 54.

Attachment

Table 2 lists the parameters available for the Attachment Category. Refer to Chapter 5, “Attachment Options,” on page 57 for detailed information on setting these parameters

Table 2. Attachment Category

Parameters	Values	Default
Attachment	Hot Port Switch, Parallel, Serial, USB, LAN ASCII, LAN IPDS	Hot Port Switch

IPDS Configuration

Table 3 lists the parameters available for the IPDS Configuration Category. Parameters that can be overridden by the computer are noted with a dagger (†). Refer to Chapter 6, “IPDS Configuration,” on page 59 for detailed information on setting these parameters

Table 3. IPDS Configuration Category

Parameters	Values	Default
† Characters Per Inch	10 12 15 16.7	10
† Lines Per Inch	6 8	6
† Maximum Print Position	001 to 227	132
† Maximum Page Length	001 to 880	066
† Print Quality	Fast Draft Quality DP Quality DP Text Quality Near Letter Quality	Fast Draft Quality
Host Fast Draft	Enabled Disabled	Enabled
† Print Language	037 to 1149 Supported Print Languages See Table 13 on page 64.	500 International 5
Host Fast Draft	Disabled Enabled	Enabled

Table 3. IPDS Configuration Category (continued)

Parameters	Values	Default
Emulation Mode	4247 4224 4230	4247
Media Size Priority	Standard Alternate	Alternate
Bar Code Mode	High Low Computer Selected	High
Graphics Mode	High Low Computer Selected	High
Alarm Control	Disabled Enabled	Enabled

ASCII Configuration

Table 4 lists the parameters available for the ASCII Configuration Category. Parameters that can be overridden by the computer are noted with a dagger (†). Refer to Chapter 7, “ASCII Configuration” for detailed information on setting these parameters.

Table 4. ASCII Configuration

Parameters	Values	Default
† Characters Per Inch (CPI)	10 12 15 16.7 17.1 20	10
† Lines Per Inch (LPI)	6 8	6
† Maximum Print Position (MPP)	1 to 272	136
† Maximum Page Length (MPL)	1 to 880	66
† Perforation Skipping	0 to 879	0
† Emulation Mode	4247 2381 Personal Printer 4202 Proprinter III XL Epson-FX	4247
† Print Language	000-1251 Supported Print Languages See Table 13 on page 64.	437 PC (When emulation mode is set to 4247, 4202 III XL, 2381); 0 USA (When emulation mode is set to Epson-FX)
† Print Quality (When emulation mode is set to 4247, 4202 III XL, 2381)	Fast Draft Quality DP Quality DP Text Quality Near Letter Quality OCR-A OCR-B	Fast Draft Quality

Table 4. ASCII Configuration (continued)

Parameters	Values	Default
† Print Quality (When emulation is set to Epson-FX)	Fast Draft Quality DP Quality Courier Gothic OCR-A OCR-B	DP Quality
Host Fast Draft	Disabled Enabled	Enabled
NLQ Typeface (When emulation mode is set to 4247, 4202 III XL, 2381)	Courier Gothic	Courier
Character Set	PC1 PC2 Italics	PC1
Printer Compatibility 3 (Automatic LF on CR)	Disabled Enabled	Disabled
Printer Compatibility 4 (Automatic CR on LF) (When emulation mode is set to 4247, 4202 III XL, or 2381)	Disabled Enabled	Disabled
Printer Compatibility 5 (Form Feed Suppression) (When emulation mode is set to 4247, 4202 III XL, or 2381)	Disabled Enabled	Disabled
Printer Compatibility 6 (Init)	Enabled Disabled	Enabled
Printer Compatibility 7 (Condensed Print) (When emulation mode is set to 4247, 4202 III XL, or 2381)	15 16.7 17.1	17.1
Printer Compatibility 8 (Slashed Zero)	Disabled Enabled	Disabled
Printer Compatibility 9 (20 CPI) (When emulation mode is set to 4247, 4202 III XL, or 2381)	Enabled Disabled	Enabled
Alarm Control	Enabled Disabled	Enabled
Override Host Paper Source	Enabled Disabled	Disabled
Override Host Characters Per Inch	Enabled Disabled	Disabled
Override Host Lines Per Inch	Enabled Disabled	Disabled
Override Host Maximum Page Length	Enabled Disabled	Disabled

Table 4. ASCII Configuration (continued)

Parameters	Values	Default
Parallel Interface Interface Type	PC Parallel 1284 Parallel	PC Parallel
Parallel Interface Input Buffer Size	256 2K 12K 32K 64K 128K	32K
Parallel Interface Select-In Signal (When emulation mode is set to Epson-FX)	Enabled Disabled	Enabled
Parallel Interface AutoFeed XT (When emulation mode is set to Epson-FX)	Disabled Enabled	Disabled
Serial Interface Interface Type	RS-232C	RS-232C
Serial Interface Input Buffer Size	256 2K 12K 32K 64K 128K	32K
Serial Interface Data Bits	7 8	8
Serial Interface Baud Rate	300 600 1200 2400 4800 9600 19200 38400 115200	9600
Serial Interface Parity	None Odd Even Mark Space	None
Serial Interface Pacing Control	DTR XON/XOFF	DTR
Serial Interface Connection Type	Local Remote	Local
LAN Interface* IP Address Assignment	Fixed, DHCP	Fixed
LAN Interface* IP Address	Example: 127.000.000.000	127.000.000.000
LAN Interface* Subnet Mask	Example: 255.255.254.000	255.255.254.000

Table 4. ASCII Configuration (continued)

Parameters	Values	Default
LAN Interface* Default Gateway	Example: 000.000.000.000	000.000.000.000
LAN Interface* Host Name	14 characters (max)	4247_XXXXXX
LAN Interface* Workgroup Name	14 characters (max)	Workgroup
LAN Interface* SMTP Service	Disabled Enabled	Disabled
LAN Interface* Mail Server Address	Example: 000.000.000.000	000.000.000.000
LAN Interface* E-mail Address (Receiver)	48 Characters (max)	Null String
LAN Interface* E-mail Address (Sender)	48 Characters (max)	Null String
*If the LAN ASCII or LAN ASCII/IPDS attachment is installed.		

Printer setup

Table 5 lists the parameters available for the Printer Setup Category. Parameters that can be overridden by the computer are noted with a dagger (†). Refer to Chapter 8, “Printer Setup,” on page 107 for detailed information on setting these parameters.

Table 5. Printer setup

Parameters	Values	Default
† Paper Source	Front Rear	Front
Front Forms Backup	Enabled Disabled	Enabled
Rear Forms Backup (when second tractor installed)	Enabled Disabled	Enabled
Continuous Forms Linking (when second tractor installed)	Disabled Enabled	Disabled
Form Feed Mode	Not Active in Ready State Active in Ready State	Not Active in Ready State
Automatic Eject	Disabled Enabled	Disabled
Automatic Restore	Disabled Data Timer (10 seconds) Timer (20 seconds) Timer (30 seconds) Timer (40 seconds) Timer (50 seconds)	Disabled
Continuous Forms Eject Mode	Immediate Eject Delayed Eject	Immediate Eject
Bar Code Print Direction	Unidirectional Bidirectional	Unidirectional

Table 5. Printer setup (continued)

Parameters	Values	Default
Graphics Print Direction	Unidirectional Bidirectional	Unidirectional
Perforation Safety	Disabled Enabled	Disabled
Jam Sensors	Enabled Disabled	Enabled

Printer adjustment

Table 6 lists the parameters available for the Printer Adjustment Category. Refer to Chapter 9, “Printer Adjustments” for detailed information on setting these parameters.

Table 6. Printer Adjustment

Parameters	Values	Default
Front AFTA*	-5 to +3 Fixed 1 to 8	0
Front Tear Position	-390 to +30	0
Front Left Margin Alignment	0 to 60	0
Front Paper Load Position	-30 to +360	0
Rear AFTA* (when optional second tractor is installed)	-5 to +3 Fixed 1 to 8	0
Rear Tear Position (when optional second tractor is installed)	-390 to +30	0
Rear Left Margin Alignment (when optional second tractor is installed)	0 to 60	0
Rear Paper Load Position (when optional second tractor is installed)	-30 to +360	0
*Fixed values in 0.5 increments (for example, Fixed 1, Fixed 1.5...Fixed 8)		

Power on reset

Table 7 lists the parameters available for the Power On Reset. Refer to Chapter 10, “Power-On Reset (POR),” on page 127 for detailed information on setting these parameters.

Table 7. Power On Reset

Parameters	Values	Default
Power On Reset	Yes	N/A

Display Language

Table 8 lists the parameters available for the Display Language Category. Refer to Chapter 11, “Display Language,” on page 129 for detailed information on setting these parameters.

Table 8. Display Language

Parameters	Values	Default
Display Language	000 English 001 Deutsche 002 Français 003 Italiano 004 Español 005 Nederlands 006 Dansk 007 Português 008 Norsk 009 Svenska 010 Suomi 011 Polski	000 English

Vital Product Data

Table 9 lists the parameters available for the Vital Product Data Category. Refer to Chapter 12, “Vital Product Data,” on page 131 for detailed information on setting these parameters.

Table 9. Vital Product Data category

Parameters	Values	Default
Serial Number	xxxxxxx	0000000
Device Specific Information	xxxxxxxxxxxxxxxxxx	0000000000000000

Quiet Print

Table 10 lists the parameters available for the Quiet Print category. Refer to Chapter 13, "Quiet Print," on page 133 for detailed information on setting these parameters.

Table 10. Quiet Print Category

Parameters	Values	Default
Quiet Print	No Yes	No

Hex Print

Table 11 lists the parameters available for the Hex Print category. Refer to Chapter 14, "Hex Print," on page 135 for detailed information on setting these parameters.

Table 11. Hex Print Category

Parameters	Values	Default
Hex Print	No Yes	No

Quit from Menu

Table 12 lists the parameters available for the Quit From Menu Category. Refer to Chapter 15, "Quit From Menu," on page 137 for detailed information on setting these parameters.

Table 12. Quit From Menu category

Parameters	Values	Default
Quit From Menu	Restore Previous Values	N/A

Chapter 4. Configuration storage

Custom sets	49	Power-on custom set	52
Non-custom set	49	Power-on paper source	53
Save current values in custom sets.	50	Recall factory defaults.	54
Recall custom set values	51	Printing custom sets	55

This chapter describes the procedures for setting configuration storage values. It explains the two types of configuration storage (custom and non-custom) and describes how to create and save them in printer memory.

Custom sets

There are eight custom sets (A, B, C, D, E, F, G, and H) that you can create and retain. Custom sets contain values for the parameters listed in Chapter 3, “Checking and changing configuration parameter values,” on page 37.

Non-custom set

The non-custom set contains parameter values that stay the same, no matter which custom set you are using. The following parameter values are saved in this part of printer memory:

- Configuration Storage
 - All
- Attachment
- Parallel Interface
 - Printer Compatibility 6 (Init)
 - Interface Type
 - Input Buffer Size
 - Select-In Signal
 - AutoFeed-XT
- Serial Interface
 - All, except Interface Type, Input Buffer Size, Data Bits, Baud Rate, Parity, Pacing Protocol, and Connection Type
- LAN Interface
 - All
- Printer Setup
 - Paper Source
- Power On Reset
 - Yes
- Vital Product Data
- Quit From Menu

Changes to these values are saved at the same time you save values that go into custom sets. If you save a change made to one of these non-custom set parameter values, the new value will be in effect no matter which custom set you recall.

Save current values in custom sets

The Save Current Values stores the current values of the configuration parameters to one of the eight custom sets (described in “Custom sets” on page 49).

You can save the current values to:

- Custom Set A
- Custom Set B
- Custom Set C
- Custom Set D
- Custom Set E
- Custom Set F
- Custom Set G
- Custom Set H

All of the custom sets are initially set to the manufacturing default values.

To save current configuration values in a custom set, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Configuration Storage
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Configuration Storage
Save Current Values
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired custom set value is displayed.

Note: If you have previously created a custom set definition for that letter, that information will be replaced with the new information when you press **ENTER**.

7. Press **ENTER**.
The printer displays a message similar to

```
Save Current Values
Custom Set A Saved
```

8. Use **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39. The display will be updated to show the new custom set that is in use. See “Custom set In-Use indicator” on page 29.

Recall custom set values

The Recall Custom Set values recalls configuration parameters previously stored. (Custom sets are described in “Custom sets” on page 49.)

You can recall current values from:

- Custom Set A
- Custom Set B
- Custom Set C
- Custom Set D
- Custom Set E
- Custom Set F
- Custom Set G
- Custom Set H

Note: When a new custom set is recalled, a partial reset is automatically performed when exiting from the configuration menu if the value of at least one of the parameters that requires a partial reset has been changed. Buffered data will be lost.

To recall custom set values, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Configuration Storage
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Configuration Storage
Recall Custom Set Values
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired custom set value is displayed.
7. Press **ENTER**. The printer displays a message similar to

```
Recall Custom Set
Custom Set A Recalled
```

8. Use **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Power-on custom set

The Power-On Custom Set is the custom set that is used when the printer is turned on. The Last Used value means the custom set used before the printer was turned off is to be used as the power-on custom set.

You can change the Power-On Custom Set to:

- Last Used (Default)
- Custom Set A
- Custom Set B
- Custom Set C
- Custom Set D
- Custom Set E
- Custom Set F
- Custom Set G
- Custom Set H

To change or check the power-on custom set, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

CONFIGURATION MENU Configuration Storage

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

Configuration Storage Power-On Custom Set
--

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired custom set for the new power-on custom set is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected custom set.
8. Use **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Power-on paper source

The Power-On Paper Source allows you to select which paper source is to be used when the printer is turned on. The Last Used value means that the paper source used before the printer was turned off is to be used as the power-on paper source.

You can change the Power-On Paper Source to:

- Front (Default)
- Rear
- Last Used

Selecting Last Used causes the Paper Source parameter (in the Printer Setup menu) to be updated whenever the data stream selects a paper source. If the data stream attempts to select the operator panel setting for power-on paper source, the most recently selected paper source will be used instead.

To change or check the power-on paper source, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Configuration Storage
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Configuration Storage
Power-On Paper Source
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired Power-on Paper Source value is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected paper source.
8. Use **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Recall factory defaults

This function sets all parameter values to the original manufacturing default values, except Vital Product Data and Printer Address. These settings can only be changed through their own menu selection.

The printer is shipped with all of the custom sets set to manufacturing default values and custom set A as the power-on custom set. The Recall Factory Defaults function does not affect the values saved in custom sets.

Note: When factory defaults are recalled, a partial reset is automatically performed when exiting from the configuration menu if the value of at least one of the parameters that requires a partial reset has been changed. Buffered data will be lost.

To recall the factory defaults, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Configuration Storage
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Configuration Storage
Recall Factory Defaults
```

5. Press **ENTER**.
- The printer displays

```
Recall Factory Defaults
Yes
```

6. Press **ENTER**.
- The printer displays

```
Recall Factory Defaults
Factory Defaults Recalled
```

7. Use **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Printing custom sets

Use this function to create a printout of the eight custom set values.

On the first page of the printout, each custom set is identified as either In Use or as Factory Defaults.

In Use

At least one value in the custom set is different from the factory default value. A flag (***) is printed after each parameter value that is different from the factory default.

Factory Defaults

A custom set that is identical to one of the factory defaults.

If a custom set is identical to the factory defaults, it will be identified as Factory Defaults. If the only change from factory defaults is a non-custom set parameter value (a value that stays the same no matter which custom set you are using), only the first custom set will be identified as In Use. The other custom sets will be shown as factory defaults.

To print the custom sets:

1. Press **STOP** to make the printer *not ready*.
2. Press **TEST**.
3. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

OPERATOR PRINT TESTS
Print Custom Sets

4. Use **ENTER** or **START** to begin the test. The printout will list all the custom sets.

The Ready indicator is lighted, and the Print Test prints. The printout is complete when the Ready indicator is no longer lighted.

5. Press **CANCEL PRINT** to make the printer *ready*, or **RETURN** to make the printer *not ready*.

Chapter 5. Attachment Options

This chapter describes the procedures for setting your printer attachment. Your printer is capable of attaching individually through the following attachment interface options:

- Bidirectional IEEE 1284 Parallel
- Serial RS232/C 9-Pin
- USB 2.0
- ASCII Ethernet 10/100 BaseT LAN
- ASCII-IPDS Ethernet 10/100 BaseT LAN

The attachments you have depend on what you requested at the time you placed your order for the printer. To change or check the attachment selection, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** (down) until the printer displays

```
CONFIGURATION MENU
Attachment
```

3. Press **ENTER**.
The printer displays

```
Attachment
* xxxxxx
```

Where *xxxxxx* (depending on your currently selected attachment) can be Hot Port Switch, Parallel, Serial, USB, LAN ASCII, or LAN IPDS.

4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value is displayed.
5. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
6. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Chapter 6. IPDS Configuration

Characters Per Inch (CPI)	59	Print Language	64
Lines Per Inch (LPI)	60	Emulation Mode.	65
Maximum Print Position (MPP).	60	Media Size Priority.	66
Maximum Page Length (MPL)	61	Bar Code Mode	67
Print Quality	62	Graphics Mode	68
Host Fast Draft	63	Alarm Control	68

This chapter describes how to check and change IPDS configuration parameters for your 4247 printer. The chapter is divided into sections according to parameter. Refer to this partial table of contents for parameter and page listings.

Characters Per Inch (CPI)

You can set the Characters Per Inch (CPI) to any of the following values:

- 10 (Default)
- 12
- 15
- 16.7

Notes:

1. It is possible to specify a CPI value that causes the page width (maximum print position) to exceed the maximum physical page width. If this occurs, the printer automatically changes the maximum print position to the highest valid value for the new CPI setting. See “Maximum Print Position (MPP)” on page 60 for more information.
2. This parameter can be overridden by the computer.
3. Only 10 CPI is valid when either OCR-A or OCR-B is selected as a print language.

To change or check the CPI value, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.

The printer displays

```
IPDS Configuration
Characters Per Inch
```

4. Press **ENTER** to display the current value.
5. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for CPI is displayed.
6. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
7. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Lines Per Inch (LPI)

You can set the lines per inch (LPI) for the printer to either of the following values:

- 6 (Default)
- 8

Note: This parameter can be overridden by the computer.

To change or check the LPI, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

CONFIGURATION MENU IPDS Configuration
--

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

IPDS Configuration Lines Per Inch

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for LPI is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Maximum Print Position (MPP)

The maximum print position (MPP) equals the number of characters the printer prints on a line. The default value is 132.

The CPI setting you choose directly influences the MPP value you select. The MPP and CPI settings determine the length of the print line. The maximum line length for the printer is 345.44 mm (13.6 in.).

The CPI setting and the line length determine the MPP. Multiply the CPI by the line length to determine the appropriate MPP:

$$\text{MPP} = \text{CPI} \times \text{line length (in inches)}$$

If your CPI is:	MPP cannot be greater than:
10	136
12	163
15	204
16.7	227

Notes:

1. Setting the MPP larger than the paper width can result in lost data because of printing on the platen and may damage the platen and the printhead.
2. This parameter can be overridden by the computer.

To change or check the MPP value, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Maximum Print Position
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for MPP is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Maximum Page Length (MPL)

You can set the maximum page length (MPL) for the printer from 1–660 lines for 6 LPI and 1–880 lines for 8 LPI. The default value is 66 lines.

MPL equals the number of print lines the printer can print on a page. MPL is the page length stated in number of print lines.

See the following example to determine how to calculate the MPL.

The LPI and the page length determine the MPL. Multiply the lines per inch by the page length to determine the appropriate MPL:

$$\text{MPL} = \text{LPI} \times \text{page length (in inches)}$$

For example, if LPI=6 and page length=254 mm (10 in.), then

$$\text{MPL} = 6 \times 10$$

$$\text{MPL} = 60$$

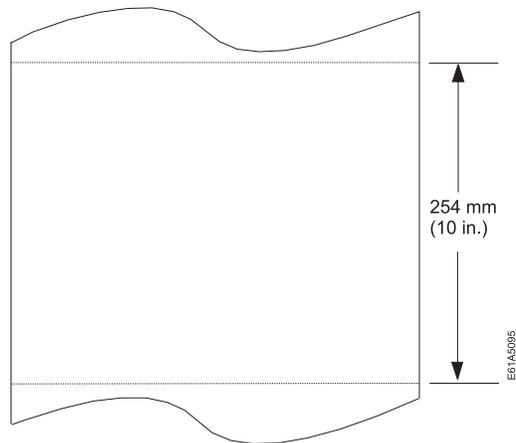


Figure 38. Example of LPI and page length

Note: This parameter can be overridden by the computer.

To change or check the MPL, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Maximum Page Length
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for MPL is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Print Quality

You can set the Print Quality for the printer to any of the following values:

- **Fast Draft Quality** (Default)
- **DP (Data Processing) Quality**
- **DP Text Quality**
- **Near Letter Quality (NLQ)**.

Notes:

1. This parameter can be overridden by the computer.
2. Only Near Letter Quality is valid when either OCR-A or OCR-B is selected as the print language.

To change or check the Print Quality, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Print Quality
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Print Quality is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Host Fast Draft

You can set the Host Fast Draft Parameter to the following values:

Enabled (Default)	If you select Enabled, the highest print speed (lowest print quality) available through the data stream is Fast Draft Quality. DP Quality is not selectable via the data stream.
Disabled	If you select Disabled, the highest print speed (lowest print quality) available through the data stream is DP Quality. Fast Draft Quality is not selectable via the data stream.

To change or check this parameter, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Host Fast Draft
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Host Fast Draft is displayed on the second line of the display.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Use Start or Return to exit the Menu (see “Exiting the configuration menu” on page 39).

Print Language

The following print languages are available on the printer when attachment is set to LAN IPDS. The default is marked with an asterisk (*). You can select any print language that is available for your printer.

Determine the value for the language setting you want from the following table:

Table 13. Supported Print Languages

Code Page	Language
37	USA/Canada
260	Canadian French
273	Austrian/German
274	Belgian Old
275	Brazilian
277	Danish/Norwegian
278	Finnish/Swedish
280	Italian
281	Japanese English
282	Portuguese
284	Spanish/Spanish Speaking
285	English (UK)
290	Japanese Katakana
297	French/French Azerty
420	Arabic
423	Greek (Old)
424	Hebrew Bulletin
500 (*)	International 5/Swiss/Belgian
813	Greek/Latin (ISO 8859-7) + euro
833	Korean
838	Thai
870	Latin 2/ROECE
871	Icelandic
875	Greek (New) + euro
880	Cyrillic
890	Yugoslav (Old)
892	OCR-A
893	OCR-B
924	Latin 9 (ISO 8859) + euro
1025	Cyrillic Multilingual
1026	Latin-5 Turkey
1097	Farsi
1112	Baltic Multilingual
1122	Estonian

Table 13. Supported Print Languages (continued)

Code Page	Language
1140	USA/Canada + euro
1141	Austrian/German + euro
1142	Danish/Norwegian + euro
1143	Finnish/Swedish + euro
1144	Italian + euro
1145	Spanish/Spanish Speaking + euro
1146	English (UK) + euro
1147	French plus euro
1148	International 5/Belgian New + euro
1149	Icelandic + euro

Notes:

1. The printer performs a partial reset to put any change to this parameter value into effect when you exit the Configuration Menu with **START** or **RETURN**. Buffered data will be lost.
2. This parameter can be overridden by the computer.
3. When either OCR-A or OCR-B is selected, the selectable options for CPI and print quality become fixed at 10 CPI and Near Letter Quality, respectively.

To change or check the print language value, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Print Language
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired language value is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Emulation Mode

You can set Emulation Mode to the following values:

- 4247 (Default)
- 4224
- 4230

Notes:

1. The printer performs a partial reset to put any change to this parameter value into effect when you exit the Configuration Menu with **START** or **RETURN**. Buffered data will be lost.
2. When changing the value of the Emulation Mode, verify the Data Stream and the Printer Address you have set.

To change or check the emulation mode, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Emulation Mode
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Emulation Mode is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Media Size Priority

This parameter is available only if the IPDS feature is installed, and the IPDS data stream is selected. It affects the use of the XOH Set Media Size (SMS) order. This order may be used in the IPDS data stream to set the page size. The Media Size Priority setting specifies whether XOH-SMS orders take precedence over the operator panel settings for maximum print position (MPP) and maximum page length (MPL).

The following values will be displayed in the menu:

Standard	The smaller page size values have priority. The page size will be the intersection (smaller values) of the operator panel settings and the XOH-SMS X and Y values.
Alternate (Default)	The XOH-SMS order values have priority. If an XOH-SMS order is present, its values will be used to define the page size instead of the operator panel settings.

The media size is defined by the MPP and MPL parameters.

To change or check the Media Size Priority, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Media Size Priority
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for media size priority is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Bar Code Mode

This parameter is valid only if the IPDS feature is installed and the IPDS data stream is selected. Changing the value of this parameter can affect throughput in some printing environments.

You can set the Bar Code Mode to any of the following values:

High (Default)	High Contrast Bar Codes
Low	Low Contrast Bar Codes
Computer Selected	Contrast as specified by the IPDS data stream

Note: The printer performs a partial reset to put any change to this parameter value into effect when you exit the Configuration Menu with **START** or **RETURN**. Buffered data will be lost.

To change or check the bar code mode, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Bar Code Mode
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for bar code mode is displayed
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.

8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Graphics Mode

This parameter is available only if the IPDS feature is installed and the IPDS data stream is selected. Changing the value of this parameter can affect throughput in some printing environments.

You can set the Graphics Mode to any of the following values:

High (Default)	High Density Graphics
Low	Low Density Graphics
Computer Selected	Density as specified by the IPDS data stream

Note: The printer performs a partial reset to put any change to this parameter value into effect when you exit the Configuration Menu with **START** or **RETURN**. Buffered data will be lost.

To change or check the graphics mode, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Graphics Mode
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for graphics mode is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Alarm Control

You can set the audible printer alarm to either of the following values:

- **Enabled** (Default)
- **Disabled**

Note: Pressing **SET TOP OF FORM** and some unit check conditions sound the alarm, even if it is disabled.

To change or check the alarm control, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
IPDS Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
IPDS Configuration
Alarm Control
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for alarm control is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Chapter 7. ASCII Configuration

Characters Per Inch (CPI)	71	Maximum Page Length	91
Lines Per Inch (LPI)	72	Parallel Interface.	92
Maximum Print Position (MPP).	73	Interface Type	92
Maximum Page Length (MPL)	74	Input Buffer Size	92
Perforation Skipping	75	Select-In	93
Emulation Mode.	75	AutoFeed-XT	94
Print Language	76	Serial Interface	95
Print Quality	78	Interface Type	95
Host Fast Draft	79	Input Buffer Size	95
NLQ Typeface	79	Data Bits	96
Character Set	80	Baud Rate	97
Printer Compatibility 3 (Automatic Line Feed on Carriage Return).	81	Parity	97
Printer Compatibility 4 (Automatic Carriage Return on Line Feed).	82	Pacing Control	98
Printer Compatibility 5 (Form Feed Suppression).	83	Connection Type.	99
Printer Compatibility 6 (Init)	84	LAN Interface	100
Printer Compatibility 7 (Condensed Print)	85	IP Address Assignment	100
Printer Compatibility 8 (Slashed Zero)	86	IP Address	100
Printer Compatibility 9 (20 CPI)	87	Subnet Mask	101
Alarm Control	88	Default Gateway	102
Override Host Parameters	89	Host Name	102
Paper Source	89	Workgroup Name	103
Characters Per Inch (CPI).	89	SMTP Service	104
Lines Per Inch (LPI)	90	Mail Server Address	104
		E-Mail Address (Receiver)	105
		E-Mail Address (Sender).	106

This chapter describes the procedures for checking and changing ASCII configuration parameters for your 4247 printer. The chapter is divided into sections according to parameter. Refer to the partial table of contents at the beginning of this chapter for parameter and page listings.

Characters Per Inch (CPI)

You can set the Characters Per Inch (CPI) to any of the following values:

- 10 (Default)
- 12
- 15
- 16.7
- 17.1
- 20

Notes:

1. It is possible to specify a CPI value that causes the page width (maximum print position) to exceed the maximum physical page width. If this occurs, the printer automatically changes the maximum print position to the highest valid value for the new CPI setting. See “Maximum Print Position (MPP)” on page 73 for more information.
2. This parameter can be overridden by the computer.
3. Only 10 CPI is valid when either OCR-A or OCR-B is selected as a print language.

To change or check the CPI value, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
The printer displays

```
ASCII Configuration
Characters Per Inch
```

4. Press **ENTER** to display the current value.
5. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for CPI is displayed.
6. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
7. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Lines Per Inch (LPI)

You can set the lines per inch (LPI) for the printer to either of the following values:

- 6 (Default)
- 8

Note: This parameter can be overridden by the computer.

To change or check the LPI, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Lines Per Inch
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for LPI is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Maximum Print Position (MPP)

The maximum print position (MPP) equals the number of characters the printer prints on a line. The default value is 136.

The CPI setting you choose directly influences the MPP value you select. The MPP and CPI settings determine the length of the print line. The maximum line length for the printer is 345.44 mm (13.6 in.).

The CPI setting and the line length determine the MPP. Multiply the CPI by the line length to determine the appropriate MPP:

$$\text{MPP} = \text{CPI} \times \text{line length (in inches)}$$

If your CPI is:	MPP cannot be greater than:
10	136
12	163
15	204
16.7	227
17.1	233
20	272

Notes:

1. Setting the MPP larger than the paper width can result in lost data because of printing on the platen and may damage the platen and the printhead.
2. This parameter can be overridden by the computer.

To change or check the MPP value, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Maximum Print Position
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for MPP is displayed.
7. Press **ENTER**.

An asterisk (*) will be displayed in front of the selected value.

8. Press **START** or **RETURN** to exit the Menu. See "Exiting the configuration menu" on page 39.

Maximum Page Length (MPL)

You can set the maximum page length (MPL) for the printer from 1–880 lines, depending on the LPI setting. The default value is 66 lines.

MPL equals the number of print lines the printer can print on a page. MPL is the page length stated in number of print lines.

See the following example to determine how to calculate the MPL.

The LPI and the page length determine the MPL. Multiply the lines per inch by the page length to determine the appropriate MPL:

$$\text{MPL} = \text{LPI} \times \text{page length (in inches)}$$

For example, if LPI=6 and page length=254 mm (10 in.), then

$$\text{MPL} = 6 \times 10$$

$$\text{MPL} = 60$$

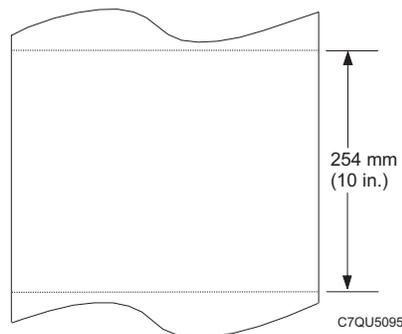


Figure 39. Example of LPI and page length

Note: This parameter can be overridden by the computer.

To change or check the MPL, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Maximum Page Length
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for MPL is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Perforation Skipping

Use this parameter to create a bottom margin on your printed page, if the host data stream does not create a bottom margin.

The range of values is 0 to 879 lines, at 8 lpi. The default value is 0.

To change or check perforation skipping, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓**. The printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓**. The printer displays

```
ASCII Configuration
Perforation Skipping
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired Perforation Skipping value is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Emulation Mode

You can set Emulation Mode to the following values:

- 4247 (Default)
- 2381 Personal Printer
- 4202 Proprinter III XL
- Epson-FX

Note: The printer performs a partial reset to put any change to this parameter value into effect when you exit the Configuration Menu with **START** or **RETURN**. Buffered data will be lost.

To change or check the emulation mode, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Emulation Mode
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Emulation Mode is displayed.

7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Print Language

The following print languages are available on the printer when attachment is set to Parallel, Serial, USB, or LAN ASCII. The defaults are marked with an asterisk (*). You can select any print language that is available for your printer.

Determine the value for the language setting you want from the following tables:

Code Page (When emulation is set to Epson-FX)	Code Page (When emulation is set to 4247, 4202 III XL, 2381 Personal Printer)	Language
0(*)	N/A	USA
1	N/A	France
2	N/A	Germany
3	N/A	U.K.
4	N/A	Denmark I
5	N/A	Sweden
6	N/A	Italy
7	N/A	Spain I
8	N/A	Japan
9	N/A	Norway
10	N/A	Denmark II
11	N/A	Spain II
12	N/A	Latin America I
13	N/A	French Canadian
14	N/A	Latin American II
N/A	437(*)	USA PC A-54
N/A	737	Greek (MS DOS)
N/A	813	Greek/Latin (ISO 8859-7)
N/A	819	Latin 1 (ISO 8859-1)
N/A	850	PC Multilingual
N/A	851	Greek (Old)
N/A	852	Latin 2/ROECE
N/A	853	Latin 3 PC
N/A	855	Cyrillic PC
N/A	857	Latin 5-Turkey + euro
N/A	858	PC Multilingual + euro
N/A	860	Portuguese
N/A	861	Icelandic
N/A	862	Hebrew

Code Page (When emulation is set to Epson-FX)	Code Page (When emulation is set to 4247, 4202 III XL, 2381 Personal Printer)	Language
N/A	863	Canadian French
N/A	864	Arabic
N/A	865	Danish/Norwegian
N/A	866	PC Data, Cyrillic, Russian
N/A	869	Greek (New) + euro
N/A	874	Thai
N/A	876	OCR-A
N/A	877	OCR-B
N/A	912	Latin 2 (ISO 8859-2)
N/A	913	Latin 3 (ISO 8859-3)
N/A	914	Latin 4 (ISO 8859-4)
N/A	915	Cyrillic (ISO 8859-5)
N/A	916	Latin 8 (ISO 8859-8)
N/A	920	Latin 5 (ISO 8859-9)
N/A	921	Baltic Multilingual
N/A	922	Estonian
N/A	923	Latin 9 (ISO8859-15)
N/A	1006	Urdu
N/A	1046	Arabic Extended
N/A	1089	Latin 6 (ISO 8859-6)
N/A	1098	Farsi (PC)
N/A	1116	Estonia PC
N/A	1117	Latvia PC
N/A	1118	Lithuania PC
N/A	1250	Central Europe Latin 2
N/A	1251	Cyrillic Windows + euro

Notes:

1. The printer performs a partial reset to put any change to this parameter value into effect when you exit the Configuration Menu with **START** or **RETURN**. Buffered data will be lost.
2. This parameter can be overridden by the computer.
3. When either OCR-A or OCR-B is selected, the selectable options for CPI and print quality become fixed at 10 CPI and Near Letter Quality, respectively.

To change or check the print language value, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

CONFIGURATION MENU ASCII Configuration

3. Press **ENTER**.

4. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
ASCII Configuration
Print Language
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the desired language value is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Print Quality

When emulation mode is set to 4247, 4202 III XL, or 2381 Personal Printer, you can set the printer to any of the following values:

- **Fast Draft Quality** (Default)
- **DP Quality**
- **DP Text Quality**
- **Near Letter Quality**
- **OCR-A**
- **OCR-B**

When emulation mode is set to Epson-FX, you can set the printer to any of the following values:

- **Fast Draft Quality** (Default)
- **DP Quality**
- **Courier**
- **Gothic**
- **OCR-A**
- **OCR-B**

Notes:

1. This parameter can be overridden by the computer.
2. Only OCR-A and OCR-B are valid when either OCR-A or OCR-B is selected as the print language.

To change or check the Print Quality, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
ASCII Configuration
Print Quality
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the desired value for Print Quality is displayed.

7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Host Fast Draft

You can set the Host Fast Draft Parameter to the following values:

Enabled (Default)	If you select Enabled, the highest print speed (lowest print quality) available through the data stream is Fast Draft Quality. DP Quality is not selectable via the data stream.
Disabled	If you select Disabled, the highest print speed (lowest print quality) available through the data stream is DP Quality. Fast Draft Quality is not selectable via the data stream.

To change or check this parameter, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Host Fast Draft
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Host Fast Draft is displayed on the second line of the display.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Use Start or Return to exit the Menu (see “Exiting the configuration menu” on page 39).

NLQ Typeface

This parameter is displayed when emulation mode is set to 4247, 4202 III XL, or 2381 Personal Printer. This parameter allows you to set the font to be used for Near Letter Quality printing. The following values are:

- **Courier** (Default)
- **Gothic**

To change or check the NLQ Typeface, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
NLQ Typeface
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for NLQ Typeface is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Character Set

You can set the character set to any of the following values:

- **PC1** (PC Character Set 1) (Default)
- **PC2** (PC Character Set 2)
- **Italic** (Epson-FX only)

To change or check the Character Set, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Character Set
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Character Set is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Printer Compatibility 3 (Automatic Line Feed on Carriage Return)

You can set the printer to perform an automatic line feed on carriage return. You can set this value to:

- Disabled** (Default) No line feed is performed after a carriage return.
Enabled An automatic line feed is performed after a carriage return.

To change or check the automatic line feed on carriage return setting, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Printer Compatibility
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Compatibility
3 (Auto LF on CR)
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Automatic Line Feed on Carriage Return is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Printer Compatibility 4 (Automatic Carriage Return on Line Feed)

This parameter is displayed when emulation mode is set to 4247, 4202 III XL, or 2381 Personal Printer.

You can set the printer to perform an automatic carriage return on a line feed. You can set this value to:

- Disabled** (Default) No automatic carriage return is performed after a line feed.
Enabled An automatic carriage return is performed after a line feed.

Note: If Emulation Mode is set to Epson-FX, an automatic carriage return is performed after a line feed regardless of the setting.

To change or check the automatic carriage return after a line feed setting, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Printer Compatibility
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Compatibility
4 (Auto CR on LF)
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Automatic Carriage Return on Line Feed is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Printer Compatibility 5 (Form Feed Suppression)

This parameter is displayed when emulation mode is set to 4247, 4202 III XL, or 2381 Personal Printer.

You can set the printer to suppress host form feed commands or to honor all host form feeds. You can set this value to:

- Disabled** (Default) All form feed commands from the host are honored.
- Enabled** Form feed commands from the host are ignored if the printer is at top of form and no data for the page was received.

Note: Operator panel form feeds are not affected.

To change or check form feed suppression, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Printer Compatibility
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Compatibility
5 (FF Suppression)
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Form Feed Suppression is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See "Exiting the configuration menu" on page 39.

Printer Compatibility 6 (Init)

You can set the printer to detect the Init signal and perform a partial reset when active or to ignore the signal. You can set this value to:

Disabled	Init signal detection disabled. No action occurs when Init is activated.
Enabled (Default)	Init signal detection enabled. When Init is activated, the printer performs a partial reset.

To change or check the Init signal, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Printer Compatibility
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Compatibility
6 (Init)
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Init is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Printer Compatibility 7 (Condensed Print)

This parameter is displayed when emulation mode is set to 4247, 4202 III XL, or 2381 Personal Printer.

You can set the printer CPI value for condensed print when a Shift In control is received from the data stream. For more information, see the *4247 Model X03 Printer Programmer Manual*.

You can set this value to:

- 15
- 16.7
- 17.1 (Default)

To change or check condensed print, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Printer Compatibility
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Compatibility
7 (Condensed Print)
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Condensed Print is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Printer Compatibility 8 (Slashed Zero)

You can set this value to:

- Disabled** (Default) All printed zeros will appear without a slash.
Enabled All printed zeros will appear with a slash.

To change or check the slashed zero, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Printer Compatibility
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Compatibility
8 (Slashed Zero)
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Slashed Zero is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Printer Compatibility 9 (20 CPI)

This parameter is displayed when emulation mode is set to 4247, 4202 III XL, or 2381 Personal Printer.

You can set the printer to allow 20 CPI condensed print from the data stream. For more information, see the *4247 Model X03 Printer Programmer Manual*.

You can set this value to:

Disabled	Does not allow 20 CPI to be accessed by the data stream.
Enabled (Default)	Allows 20 CPI to be accessed by the data stream.

To change or check 20 CPI, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Printer Compatibility
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Compatibility
9 (20 CPI)
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for 20 CPI mode is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Alarm Control

You can set the audible printer alarm to either of the following values:

- **Enabled** (Default)
- **Disabled**

Note: Pressing **Set Top of Form**, and some unit check conditions sound the alarm, even if the alarm is disabled.

To change or check the alarm control, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Alarm Control
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Alarm Control is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Override Host Parameters

Note: **Host Override** is not available for IPDS.

Paper Source

This parameter allows the printer to accept or ignore (override) the Paper Source selection commands that are sent by the host data stream. You can set Paper Source to:

- Disabled** (Default) The printer **accepts** and processes commands received from the host data stream for paper source selection.
- Enabled** The printer **ignores** commands received from the host data stream that specify paper source selection. The printer will use the paper source selected at the operator panel. Commands sent from the host cannot override the paper source selected at the operator panel.

To change or check the Paper Source:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Override Host
```

5. Press **ENTER**, and the printer displays

```
Override Host
Paper Source
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Paper Source is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Characters Per Inch (CPI)

This parameter allows the printer to accept or ignore (override) the Characters Per Inch commands that are sent by the host data stream. You can set Characters Per Inch to:

- Disabled** (Default) The printer **accepts** and processes commands received from the host data stream, for Characters Per Inch selection.
- Enabled** The printer **ignores** commands received from the host data stream, for Characters Per Inch. The printer will use the Characters Per Inch value set in the printer configuration.

To change or check the Characters Per Inch setting:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Override Host
```

5. Press **ENTER**, and the printer displays
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Override Host
Characters Per Inch
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Characters Per Inch is displayed.
9. Press **ENTER** to display the current value.
An asterisk (*) is displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Lines Per Inch (LPI)

This parameter allows the printer to accept or ignore (override) the Lines Per Inch commands that are sent by the host data stream. You can set Lines Per Inch to:

- | | |
|------------------------------|---|
| Disabled
(Default) | The printer accepts and processes commands received from the host data stream for Lines Per Inch selection. |
| Enabled | The printer ignores commands received from the host data stream for Characters Per Inch. The printer will use the Lines Per Inch value set in the printer configuration. |

To change or check the Lines Per Inch setting:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Override Host
```

5. Press **ENTER**, and the printer displays
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Override Host
Lines Per Inch
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Lines Per Inch is displayed.
9. Press **ENTER** to display the current value.
An asterisk (*) is displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Maximum Page Length

This parameter allows the printer to accept or ignore (override) the Maximum Page Length commands that are sent by the host data stream. You can set Maximum Page Length to:

Disabled (Default)	The printer accepts and processes commands received from the host data stream for Maximum Page Length selection.
Enabled	The printer ignores commands received from the host data stream for Maximum Page Length. The printer will use the Maximum Page Length value set in the printer configuration.

Disabled (Default)

Enabled

To change or check the Maximum Page Length setting:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Override Host
```

5. Press **ENTER**, and the printer displays
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Override Host
Maximum Page Length
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Maximum Page Length is displayed.
9. Press **ENTER** to display the current value.
An asterisk (*) is displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Parallel Interface

Interface Type

This parameter allows you to set the system interface for the parallel attachment. You can set Interface Type to either of the following values:

- **PC Parallel** (Default)
- **1284 Parallel**

To change or check the Interface Type:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Parallel Interface
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Parallel Interface
Interface Type
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Interface Type is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Input Buffer Size

This parameter allows you to select the size of input buffer to be used. The following values are:

- **256**
- **2K**
- **12K**
- **32K** (Default)
- **64K**
- **128K**

To change or check the Input Buffer Size:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.

4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Parallel Interface
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Parallel Interface
Input Buffer Size
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Input Buffer Size is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Select-In

This parameter is valid in Epson-FX emulation mode only and instructs the printer how to handle Select-In Signals. You can set the Select-In Signal to:

Disabled	The Select-In Signal is ignored and treated as always on.
Enabled (Default)	The printer checks the Select-In Signal from the host.

To change or check the Select-In Signal:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Parallel Interface
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Parallel Interface
Select-In
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Select-In Signal is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

AutoFeed-XT

This parameter is valid in Epson-FX emulation mode only and instructs the printer whether the host will determine if an automatic line feed is performed after a carriage return.

You can set this value to:

- Disabled** (Default) The function is determined by the setting of Printer Compatibility 3 – Automatic Line Feed on Carriage Return.
- Enabled** The host determines whether an automatic line feed is performed after a carriage return.

To change or check the AutoFeed-XT setting, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Parallel Interface
```

5. Press **ENTER**.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Parallel Interface
AutoFeed-XT
```

7. Press **ENTER** to display the current value.
8. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for AutoFeed XT is displayed.
9. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
10. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Serial Interface

Interface Type

This parameter allows you to select the Serial Interface attachment type. You can set Interface Type to:

- **RS-232C** (Default)

To change or check the Interface Type:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Serial Interface
```

5. Press **ENTER** to display

```
Serial Interface
Interface Type
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Interface Type is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Input Buffer Size

You can set the Input Buffer Size to:

- **256**
- **2K**
- **12K**
- **32K** (Default)
- **64K**
- **128K**

To change or check the Input Buffer Size:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Serial Interface
```

5. Press **ENTER** and the printer displays

```
Serial Interface
Input Buffer Size
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Input Buffer Size is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Data Bits

You can set the Data Bits to either of the following values:

- 7
- 8 (Default)

To change or check the Data Bits:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Serial Interface
```

5. Press **ENTER** and the printer displays

```
Serial Interface
Data Bits
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Data Bits is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Baud Rate

You can set the size of Baud Rate to:

- 300
- 600
- 1200
- 2400
- 4800
- 9600 (Default)
- 19200
- 38400
- 115200

To change or check the Baud Rate:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Serial Interface
```

5. Press **ENTER** and the printer displays

```
Serial Interface
Baud Rate
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Baud Rate is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Parity

You can set the Parity to:

- **None** (Default)
- **Odd**
- **Even**
- **Mark**
- **Space**

To change or check the Parity setting:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.

4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Serial Interface
```

5. Press **ENTER** and the printer displays

```
Serial Interface
Parity
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Parity is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Pacing Control

You can set the Pacing Protocol to:

- **DTR** (Default)
- **XON/XOF**

To change or check the Pacing Protocol setting:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Serial Interface
```

5. Press **ENTER** and the printer displays

```
Serial Interface
Pacing Protocol
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Pacing Protocol is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Connection Type

You can set Connection Type to:

- | | |
|------------------------|---|
| Local (Default) | Printer is connected locally to a host computer. |
| Remote | Printer is connected remotely to a host computer through an external modem. |

To change or check the Connection Type setting:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
Serial Interface
```

5. Press **ENTER** and the printer displays

```
Serial Interface
Connection Type
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Connection Type is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

LAN Interface

IP Address Assignment

You can set the IP Address Assignment to:

- **Fixed** (Default)
- **DHCP**

To change or check the IP Address Assignment:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
IP Address Assignment
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for IP Address Assignment is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

IP Address

You can set the IP Address:

For example, **127.000.000.000** (Default)

IP Address values are represented by a decimal notation. The decimal values are divided into four fields by periods. Each field's values can be between 0 and 255.

To change or check the IP Address:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
IP Address
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for IP Address is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Subnet Mask

You can set the Subnet Mask:

For example, **255.255.254.000** (Default)

These values set the Subnet Mask number. This number is represented by a decimal notation. The decimal values are divided into four fields by periods. Each field's values can range from 0 to 255.

To change or check the Subnet Mask:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
Subnet Mask
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Subnet Mask is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Default Gateway

You can set the Default Gateway:

For example, 000.000.000.000 (Default)

These values set the Default Gateway address. This number is represented by a decimal notation. The decimal values are divided into four fields by periods. Each field's values can range from 0 to 255.

To change or check the Default Gateway:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
Default Gateway
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Default Gateway is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See "Exiting the configuration menu" on page 39.

Host Name

You can set the Host Name to:

- **14 Chars** (max)
- **4247_xxxxxx** (Default)

The host is identified by a name in the NetBios protocol over TCP/IP. This function allows you to create that host name using a 14-character string. The last 6-digits of the MAC address are *xxxxxx*.

To change or check the Host Name:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
Host Name
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Host Name is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Workgroup Name

The **Workgroup Name** allows the printer to be associated with another group of printers.

To change or check the **Workgroup Name**:

- **14 Chars** (max)
- **Workgroup** (Default)

The workgroup is identified by a name in the NetBios protocol over TCP/IP. This function allows you to create the workgroup name using a 14-character string.

To change or check the Workgroup Name:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
Workgroup Name
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Workgroup Name is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

SMTP Service

SMTP (Simple Mail Transfer Protocol) allows a mail server address to be entered into the printer configuration to send automated e-mail notifications with printer alert conditions.

You can set the SMTP Service to:

Disabled (Default)	Disables the SMTP (Simple Mail Transfer Protocol) service (disables the reception/transfer/error service of the e-mail).
Enabled	Enables the SMTP service (enables the reception/transfer/error service of the e-mail).

To change or check the SMTP Service:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
SMTP Service
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for SMTP Service is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Mail Server Address

You can set the Mail Server Address:

For example, **000.000.000.000** (Default)

These values set the Mail Server Address. This number is represented by a decimal notation. The decimal values are divided into four fields by periods. Each field's values can range from 0 to 255.

Note: You can only select Mail Server Address if the “SMTP Service” function choice is Enabled.

To change or check the Mail Server Address:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
Mail Server Address
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Mail Server Address is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

E-Mail Address (Receiver)

You can set the E-Mail Address (Receiver) to:

- **48 Chars** (max)
- **Null String** (Default)

This function allows you to enter the e-mail address (up to 48 characters in length) of the person you want to notify of printer failures.

Note: You can only select E-Mail Address (Receiver) if the “SMTP Service” function is Enabled.

To change or check the E-Mail Address (Receiver):

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
E-Mail Address (Receiver)
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for E-Mail Address (Receiver) is displayed.

8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

E-Mail Address (Sender)

You can set the E-Mail Address (Sender) to:

- **48 Chars** (max)
- **Null String** (Default)

This function allows you to enter the sender's e-mail address (up to 48 characters in length).

Note: You can only select E-Mail Address (Sender) if the “SMTP Service” function choice is Enabled.

To change or check the E-Mail Address (Sender):

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
ASCII Configuration
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
ASCII Configuration
LAN Interface
```

5. Press **ENTER** and the printer displays

```
LAN Interface
E-Mail Address (Sender)
```

6. Press **ENTER** to display the current value.
7. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for E-Mail Address (Sender) is displayed.
8. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Chapter 8. Printer Setup

Paper Source	107	Automatic Eject.	112
Front Forms Backup	108	Automatic Restore.	113
Rear Forms Backup	108	Continuous Forms Eject Mode.	114
Continuous Forms Linking	109	Bar Code Print Direction	114
Form Feed Mode	110	Graphics Print Direction.	115
Controlling Tear Off Operations	110	Perforation Safety	116
Using Automatic Eject to Control Forms Eject	111	Jam Sensors	116
Using Automatic Restore to Control Restoring of			
Forms	111		

This chapter describes the procedures for checking and changing printer setup parameters for your 4247 printer. The chapter is divided into sections according to parameter. Refer to this partial table of contents for parameter and page listings.

Paper Source

The Paper Source parameter defines the current paper source for the printer. The values displayed on the operator panel depend on the forms devices installed in the printer. The paper source setting can be set to any of the following values:

- | | |
|---------------------------|---|
| Front
(Default) | The front paper path is assigned according to the forms tractors installed on the printer. The front paper path settings apply to the paper loaded with the tractor already installed on the printer, if the second (optional) tractor is not installed. If the second (optional) tractor is installed in the printer, the front paper path settings apply to the paper loaded on this second optional tractor. |
| Rear | The rear paper path settings apply to the paper loaded with the lower tractor, when the second (optional) tractor is installed on the printer. |

To change or check the Paper Source:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

CONFIGURATION MENU
 Printer Setup

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

Printer Setup
 Paper Source

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for paper source is displayed.
7. Press **ENTER**.

An asterisk (*) will be displayed in front of the selected value.

8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Front Forms Backup

This setting applies to the paper loaded on the default tractor, if the second (optional) tractor is not installed. When the second optional tractor is installed, this setting applies to the paper loaded with this tractor. The Front Forms Backup parameter instructs the printer whether it can perform tractor movements that would back the forms up. Such movements include parking the printer. This would be used when the physical characteristics of the forms currently loaded make it undesirable for the printer to attempt to move the forms in the reverse direction (for example, labels).

Even if Front Forms Backup is disabled, the **SCROLL/MICRO** can still be used for the paper path. You can define the front forms backup to either one of the following values:

Enabled (Default)	Allows the printer to back up the front forms as needed.
Disabled	Prevents the printer from backing up front forms. Use this setting for labeled continuous forms.

To change or check the Front Forms Backup:

1. Press **MENU**.
2. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
Printer Setup
Front Forms Backup
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the desired value for Front Forms Backup is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Rear Forms Backup

This parameter is displayed as long as the second (optional) tractor is installed and applies to the paper loaded on the default (lower) tractor. The Rear Forms Backup parameter instructs the printer whether it can perform tractor movements that would back the forms up. Such movements include parking the printer. This would be used when the physical characteristics of the forms currently loaded make it undesirable for the printer to attempt to move the forms in the reverse direction (for example, labels).

Even if Rear Forms Backup is disabled, the **SCROLL/MICRO** can still be used for the paper path. You can define the rear forms backup to any one the following values:

- | | |
|--------------------------|---|
| Enabled (Default) | Allows the printer to back up the rear forms as needed. |
| Disabled | Prevents the printer from backing up rear forms. |

To change or check the Rear Forms Backup:

1. Press **MENU**.
2. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
Printer Setup
Rear Forms Backup
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the desired value for Rear Forms Backup is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Continuous Forms Linking

This parameter is displayed only if the second (optional) tractor is also installed. Both Front Forms Backup and Rear Forms Backup must have the same values (either both enabled or disabled) for the continuous forms sources to be capable of being linked.

This parameter instructs the printer to automatically switch from the Front Push to Rear Push or Rear Push to Front Push paper paths when out of paper.

You can define continuous forms linking to one the following values:

- | | |
|---------------------------|--|
| Disabled (Default) | No linking is to be done. |
| Enabled | The Front Push and Rear Push continuous forms paths are to be linked together so they are treated by the printer as one continuous paper source. |

To change or check the Continuous Forms Linking:

1. Press **MENU**.
2. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO** or **SCROLL/MICRO** until the printer displays

```
Printer Setup
Continuous Forms Linking
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Continuous Forms Linking is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Form Feed Mode

You can set Form Feed Mode to either of the following values:

- **Not Active In Ready State** (Default)
- **Active In Ready State**

Selecting Active in Ready State makes the **FORM FEED** key active when the printer is *ready* and no job is processing, so that when pressed, a form feed will be performed and the printer will return to the *ready* state.

The printer does not have to be *not ready* before pressing **FORM FEED** if you change the value to Active in the *ready* state.

To change or check the form feed mode:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Setup
Form Feed Mode
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for form feed mode is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Controlling Tear Off Operations

When a path switch is requested and the top-of-forms is at the print line, the Park operation will begin automatically. No user intervention is required. In all other cases, user intervention is required. The message ‘091 FANFOLD PARK...’ or ‘092 FANFOLD EJECT...’ appears on the operator panel display.

Using Automatic Eject to Control Forms Eject

If Automatic Eject = Disabled, which is the default, you must press **LOAD/EJECT** to move the form up to the tear bar. This setting is recommended if you do not need to tear off each form as it is printed. Thus, when you determine that you need to tear off the forms, you use **LOAD/EJECT** to control the tear off operations.

If Automatic Eject = Enabled, once printing finishes the printer will wait 5 seconds then automatically move the forms up to the tear bar. This setting is recommended if you plan to tear off each form as it finishes printing. This eliminates the need to press **LOAD/EJECT** for tear off operations.

Once the forms have been ejected, the next step depends of the setting of the Automatic Restore parameter.

The settings for Automatic Eject and Automatic Restore are used to control how you want tear off operations to occur. There is only one setting in the printer configuration for Automatic Eject and one setting for Automatic Restore which apply to both the front and rear continuous forms paths. The paths cannot be controlled individually.

Using Automatic Restore to Control Restoring of Forms

After the forms have been ejected, message '003 FORMS EJECTED' is displayed. How the restore is handled depends on the setting of Automatic Restore. If user intervention is needed, information will be displayed in the second line of the '003 FORMS EJECTED' message.

If Automatic Restore = Disabled, the forms will not be restored to the print line until the **LOAD/EJECT** key is pressed. Message '003 FORMS EJECTED' will be displayed with 'PRESS LOAD' displayed in the second line to guide you.

In the following two options for Automatic Restore, the automatic restore function is being enabled. Since the forms will be restored without user intervention, the '003 FORMS EJECTED' message is just informational and will be displayed with a blank second line.

If Automatic Restore = Timer xx Seconds, the form will remain at the tear bar for the specified number of seconds then the printer will automatically restore the forms back down to the print line. When the next job is received printing will start.

If Automatic Restore = Data, once the form is at the tear bar it will remain there until the next job is received by the printer at which time the printer will automatically restore the forms back down to the print line and resume printing.

See the following tables for recommendations for Auto Eject and Auto Restore for single-path and dual path uses.

Table 14. Single Path Usage recommendations

Operation	No. Users	Tear Off	Auto Eject	Auto Restore
Single Path	1	On Demand	Disabled	Data or Timer
Single Path	1	Constant	Enabled	Data or Timer
Single Path	2 or more	On Demand	Disabled	Timer
Single Path	2 or more	Constant	Enabled	Timer

Note: The combination of settings with Automatic Eject = Enabled and Automatic Restore = Disabled is not recommended.

Table 15. Dual Path Usage recommendations

Operation	No. Users	Tear Off	Auto Eject	Auto Restore
Dual Push	1	On Demand	Disabled	Data
Dual Push	1	Constant	Enabled	Data
Dual Push	2 or more	On Demand	Disabled	Data
Dual Push	2 or more	Constant	Enabled	Data

Note: The combination of settings with Automatic Eject = Enabled and Automatic Restore = Disabled is not recommended.

Automatic Eject

This parameter is displayed for the Front Push or Rear Push forms path. You can set the printer to perform an automatic eject without pressing **LOAD/EJECT** when a print job is complete.

You can set this value to:

Enabled

When the print job is complete, the printer will perform an automatic eject after a fixed timeout of approximately 5 seconds.

Disabled (Default)

No automatic eject. The **LOAD/EJECT** is required to eject the forms.

To change or check the automatic eject after timeout, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the printer displays

CONFIGURATION MENU Printer Setup

3. Press **ENTER**.
4. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the printer displays

Printer Setup Automatic Eject

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the desired value for the Automatic Eject is displayed.

7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Automatic Restore

This parameter is displayed for the Front Push or Rear Push forms path. You can set the printer to perform an automatic load without pressing **LOAD/EJECT**.

You can set this value to:

Disabled (Default)	No automatic load. The LOAD/EJECT is required to load forms.
Data	An automatic load occurs each time a new print job is received.
Timer (10 to 50 seconds)	An automatic load with a fixed timeout value. When forms are ejected, a load function is performed after a timeout. The timeout value can be 10 seconds, 20 seconds, 30 seconds, 40 seconds, or 50 seconds.

To change or check the automatic restore, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Setup
Automatic Restore
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Automatic Restore is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

The Automatic Restore function can be enabled regardless of the status of the Automatic Eject function. Automatic Restore can be enabled even if Automatic Eject is not enabled.

Continuous Forms Eject Mode

You can set Continuous Forms Eject Mode value to:

- **Immediate Eject** (Default)
- **Delayed Eject**

Selecting Delayed Eject causes the printer to wait until the end of the current page is reached before forms are moved to the tear off position. For more information, see “LOAD/EJECT” on page 33.

To change or check Continuous Forms Eject Mode:

1. Press **MENU**.
2. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the printer displays

```
Printer Setup
Forms Eject Mode
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the desired value for Continuous Forms Eject Mode is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Bar Code Print Direction

You can set the Bar Code Print Direction to:

Unidirectional

Causes the printer to print in only one direction, either from left to right or from right to left, for each of the two passes of bar code printing on a line.

Bidirectional (Default)

Causes the printer to print as the printhead moves in both directions. (This setting causes faster throughput but may affect print quality. Verify that the print quality is acceptable before running a print job.)

To change or check the bar code print direction, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the printer displays

```
Printer Setup
Bar Code Print Direction
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for bar code print direction is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Graphics Print Direction

You can set the Graphics Print Direction to:

Unidirectional

Causes the printer to print in only one direction, either from left to right or from right to left, for each of the two passes of graphics printing on a line.

Bidirectional (Default)

Causes the printer to print as the printhead moves in both directions. (This setting causes faster throughput but may affect print quality. Verify that the print quality is acceptable before running a print job.)

To change or check the graphics print direction, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Setup
Graphics Print Direction
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for graphics print direction is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Perforation Safety

You can set perforation safety to either of the following values:

Disabled (Default)

The printhead is not parked all the way to the right of the print line while the perforation of the form is passing through the mylar opening.

Enabled

The printhead is parked all the way to the right of the print line so that the perforation of the form can advance through the mylar without the printhead touching the form.

Note: This setting is recommended for thick multiple-part forms.

To change or check the Perforation Safety value:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Setup
Perforation Safety
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for perforation safety is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Jam Sensors

You can set Jam Sensors to either of the following values:

Enabled (Default)

Enables the paper jam sensors on the front and rear tractors. This setting alerts the operator with an 002 FORMS JAMMED FRONT or 020 FORMS JAMMED REAR message on the operator panel when a jammed form is detected in one of the paper paths.

Disabled

Disables the paper jam sensors. We recommend that these sensors not be disabled.

To change or check the Jam Sensors category:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Setup
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

Printer Setup Jam Sensors

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for jam sensors is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Chapter 9. Printer Adjustments

Paper-Load-Position to Tear-Position Relationship	119	Rear Tear Position	123
Front Automatic Forms Thickness Adjustment (AFTA)	120	Rear Left Margin Alignment	123
Front Tear Position	120	Rear Paper Load Position	124
Front Left Margin Alignment	121	Bidirectional Adjustment	124
Front Paper Load Position	121	Sensor Tune	125
Rear Automatic Forms Thickness Adjustment (AFTA)	122	Quit From Menu	126

This chapter describes the procedures for checking and changing the Printer Adjustment parameters. The Printer Adjustments appear in both the Configuration Menu and in the Operator Print Tests Menu. In the Configuration Menu, the values can be set but not tested. In the Operator Print Tests, the adjustments can be set and then tried by running a print test. (See Chapter 17, “Using the Operator Print Tests,” on page 143.) Printer adjustment parameters can be set for each paper source: Front or Rear.

This chapter is divided into sections according to parameter. Refer to the partial table of contents above for parameter and page listings.

Paper-Load-Position to Tear-Position Relationship

There are Paper Load Position parameters for each forms path. These Paper Load Position settings are used to vertically align printing on the forms. An example is to center printing in a box on a preprinted form.

Whenever one of these Paper Load Position parameters is set, the printer automatically adjusts the corresponding Tear Position value to compensate for the change you made to the Load Position. This automatic adjustment keeps the forms perforation aligned to the tear bar edge when the form is ejected. However, if further adjustment is needed in the alignment of the forms perforation to the tear bar, you should adjust the Tear Position value.

The automatic adjustment changes the tear adjustment by the same number of units but in the opposite direction. Normally this adjustment means that Tear Position is set to the offsetting (“equal but opposite”) value. Stated another way, if the Load Position is set to +40, then the Tear Position is set to -40 (see example 1 in the examples that follow). However, if the current setting of the Tear Position has been changed by the operator to be different from the offsetting value, that difference from the offsetting value is maintained by the printer (see example 2 in the examples that follow).

Examples of how this works:

1. The current values in the printer are Front Paper Load Position = 0 and Front Tear Position = 0. The user sets Front Paper Load Position to +40. The printer automatically sets Front Tear Position to -40.
2. The current values in the printer are Front Paper Load Position = +40 and Front Tear Position = -44. The user changes Front Paper Load Position to +50. The printer automatically sets Front Tear Position to -54, maintaining the difference of 4 from the normal offsetting value of “equal but opposite.”

Front Automatic Forms Thickness Adjustment (AFTA)

This parameter allows you to adjust the distance between the paper and the printhead for the front forms path. Forms must be loaded for this adjustment to be effective. This adjustment can be set to one of the following values:

-5 to +3

The printer automatically adjusts the distance between the forms and the printhead. Each adjustment corresponds to 0.03 mm (.0012 in.). (The default is 0, which corresponds to a gap of 0.25 mm [.01 in.] from the forms.)

Fixed 1 to 8

Selects a fixed printhead distance value from 1 to 8, in increments of 0.5 (where each value equals approximately 0.05 mm [.002 in.]).

Default = 0

To change or check the Front AFTA:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Front AFTA
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for front AFTA is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See "Exiting the configuration menu" on page 39.

Front Tear Position

You can adjust the front tear position for forms loaded in the front forms path from -390 to +30 (where each unit is 0.176 mm [1/144 in.]). The default value is 0.

To change or check the Front Tear position:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Front Tear Position
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Front Tear Position is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Front Left Margin Alignment

This parameter adjusts the distance of the first print position to the left margin from 0 to 60 units (where each unit is 0.706 mm [1/36 in.]). The default is 0 units. The total range of adjustment is 42.36 mm (1.66 in.).

To change or check the Front Left Margin Align:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Front Left Margin Align
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Front Left Margin Align is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Note: If the left margin alignment is too large for the current print line, a 005 MARGIN ERROR ADJUST MARGIN/LINE LENGTH will occur. For more information on the message, see Chapter 19, “Problem Solving,” on page 155.

Front Paper Load Position

This parameter adjusts the distance of the first printable line to the top of the paper from -30 to +360 units (2 in.) (where each unit is 0.176 mm [1/144 in.]). The default value is 0.

To change or check the Front Paper Load Position:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Front Form Load Position
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Front Form Load Position is displayed.
7. Press **ENTER**.
An asterisk (*) is displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Rear Automatic Forms Thickness Adjustment (AFTA)

This parameter allows you to adjust the distance between the paper and the printhead for the rear forms path. Forms must be loaded for this adjustment to be effective. This adjustment can be set to one of the following values:

-5 to +3 The printer automatically adjusts the distance between the forms and the printhead. Each adjustment corresponds to 0.03 mm (.0012 in.). (The default is 0, which corresponds to a gap of 0.25 mm [.01 in.] from the forms.)

Fixed 1 to 8 Selects a fixed printhead distance value from 1 to 8 in increments of 0.5 (where each value equals approximately 0.05 mm [.002 in.]).

Default = 0

To change or check the Rear AFTA:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Rear AFTA
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Rear AFTA is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Rear Tear Position

You can adjust the rear tear position for forms loaded in the rear paper path from -390 to +30 (where each unit is 0.176 mm [1/144 in.]). The default value is 0.

To change or check the Rear Tear Position:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Rear Tear Position
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Rear Tear Position is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Rear Left Margin Alignment

This parameter adjusts the distance of the first print position to the left margin from 0 to 60 units (where each unit is 0.706 mm [1/36 in.]). The default is 0 units. The total range of adjustment is 42.36 mm (1.66 in.).

To change or check the Rear Left Margin Alignment:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Rear Left Margin Align
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Rear Left Margin Align is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Note: If the left margin alignment is too large for the current print line, an 005 MARGIN ERROR ADJ MARGIN/LINE LENGTH will occur. For more information on the message, see Chapter 19, “Problem Solving,” on page 155.

Rear Paper Load Position

This parameter adjusts the distance of the first printable line to the top of the paper from -30 to +360 units (2 in.) (where each unit is 0.176 mm [1/144 in.]). The default value is 0.

To change or check the Rear Paper Load Position:

1. Press **MENU**.
2. Press **Scroll↑** (up) or **Scroll↓** (down) until the printer displays

```
CONFIGURATION MENU
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Rear Form Load Position
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Rear Form Load Position is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Bidirectional Adjustment

You can adjust dot registration and print quality for characters on your printer by running the bidirectional adjustment test pattern. The test pattern consists of three parts: two groups of *H*'s (four lines each) with the current alignment value above them and a line of *H*'s and *I*'s printed on one line. You can set bidirectional adjustment from -6 to 6 (where each unit is 0.212 mm [1/120 in.]). The default value is 0.

Note: Bidirectional Adjustment is available only in the Operator Print Tests menu.

To change or check the bidirectional adjustment:

1. Press **TEST**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
OPERATOR PRINT TESTS
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Bidirectional Adjustment
```

5. Press **ENTER** to display the current value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Bidirectional Adjustment is displayed.
7. Press **ENTER**.
An asterisk (*) will be displayed in front of the selected value.
8. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Sensor Tune

This parameter establishes the black light threshold levels for all sensors. This adjustment is set initially when the printer is manufactured and may have to be adjusted for long-term aging of the sensor if false form jams occur or if unusual ambient lighting conditions exist in the printer location.

Important: All paper must be removed from the tractors and all covers must be installed and closed before selecting this parameter.

Note: Sensor Tune is available only in the Operator Print Tests menu.

To tune the sensors:

1. Press **TEST**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
OPERATOR PRINT TESTS
Printer Adjustments
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Printer Adjustments
Sensor Tune
```

5. Press **ENTER**. The printer displays the following:

```
Sensor Tune
Remove Forms Press ENTER
```

6. Press **ENTER**. The printer will now tune the sensors. Once the sensors are tuned, the printer displays

```
Sensor Tune
Sensor Tune Complete
```

```
Printer Adjustments
Sensor Tune
```

7. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Quit From Menu

This selection cancels any changes that have been made to the Printer Adjustment parameter values in the Operator Print Test menu. All previous printer adjustment values are restored when this parameter is selected and the printer enters the *Not Ready* state.

Note: Quit From Menu is available only in the Operator Print Tests menu.

To quit from the Operator Print Test menu and restore the previous values for Printer Adjustments only, follow these steps:

1. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

Printer Adjustments Quit from Menu

2. Press **ENTER**. The printer displays

Quit from Menu Restore Previous Values

3. Press **ENTER**. The printer restores the previous values and becomes *not ready*.

Chapter 10. Power-On Reset (POR)

Note: When power-on reset is activated, the printer performs a partial reset.

To perform a power-on reset, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Power On Reset
```

3. Press **ENTER**.

The printer displays

```
Power On Reset
Yes
```

4. Press **ENTER**.

The printer displays

```
Power On Reset
Reset Executed
```

5. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Chapter 11. Display Language

The following languages are available for displaying messages on the operator panel:

Table 16. Display Languages

Language	Value
English (Default)	000
Deutsche	001
Français	002
Italiano	003
Español	004
Nederlands	005
Dansk	006
Português	007
Norsk	008
Svenska	009
Suomi	010
Polski	011

Note: The display language changes immediately when you select a new value.

To change or check the display language, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

CONFIGURATION MENU Display Language
--

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for display language is displayed.
5. Press **ENTER**.

An asterisk (*) will be displayed in front of the selected value, and the display language will change.

6. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Note: Occasionally the display language may be changed accidentally to a language that is not understood. To recover to your native language without saving the display language in a custom set, Turn off and then Turn on the printer to restore the default setting. The display language should then be restored to your native language.

Chapter 12. Vital Product Data

You can check and change some of the vital product data for the printer. The two Vital Product Data fields you can change are:

- Serial Number
- Device Specific Information

Note: Vital Product Data values, unlike all of the other configuration values, are not saved when you save a custom set; they are saved when you exit the Configuration Menu. If you make a change to one of these values and turn off the printer before exiting the Configuration Menu, your changes will not be saved.

Serial Number

The serial number parameter holds the serial number for the printer. This number is a 7-digit alphanumeric value. The serial number of your printer is located on the *Information Label* on the back of printer and next to the power-on switch.

To check or change the serial number for the printer, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Vital Product Data
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Vital Product Data
Serial Number
```

5. Press **ENTER**.
The printer displays the current value for the serial number of the printer. A cursor (X) appears under the least significant character of the value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to change the character above the cursor.
7. Press **ENTER** to move the cursor to the next character.
8. Repeat steps 6 and 7 until the correct value for the serial number is displayed.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Device Specific Information

This parameter stores user defined information for the printer. This information is a 16-digit alphanumeric value.

To check or change the Device Specific Information for the printer, follow these steps:

1. Press **MENU**.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Vital Product Data
```

3. Press **ENTER**.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
Vital Product Data
Device Specific Info
```

5. Press **ENTER**.
The printer displays the current value for device specific information. A cursor (X) appears under the least significant character of the value.
6. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to change the character above the cursor.
7. Press **ENTER** to move the cursor to the next character.
8. Repeat steps 6 and 7 until you have checked or changed the Device Specific Information.
9. Press **START** or **RETURN** to exit the Menu. See “Exiting the configuration menu” on page 39.

Chapter 13. Quiet Print

You can enable the **Quiet Print** mode to reduce the printing noise level by two to three decibels. Enabling the **Quiet Print** mode also reduces the printer's throughput by one half. The default is **No = (Disabled)**. To enable or disable the **Quiet Print** mode:

1. Press the **MENU** key.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to select the **Quiet Print**.

CONFIGURATION MENU Quiet Print

3. Press the **ENTER** key.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to select **Yes** or **No** to enable or disable the **Quiet Print** mode.
5. Press the **ENTER** key.
6. Press the **START** key.

Chapter 14. Hex Print

The **Hex Print** function is only valid when the printer is in the *not ready* state. Use the **Hex Print** function to print all data in Hexadecimal format. The default is **No = (Disabled)**. To enable or disable the **Hex Print** function:

1. Press the **MENU** key.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to select **Hex Print**.

CONFIGURATION MENU Hex Print

3. Press the **ENTER** key.
4. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to select **Yes** or **No** to enable or disable the **Hex Print** function.
5. Press the **ENTER** key.
6. Press the **START** key.

Chapter 15. Quit From Menu

You can quit from the Configuration Menu and restore the previous configuration menu values.

This selection cancels any changes you made to the Configuration Menu Parameter Values since you last pressed **MENU** to enter the Configuration Menu.

To quit from the Configuration Menu and restore the previous values, follow these steps:

1. If CONFIGURATION MENU is not on the first line of the display, press **RETURN** until it appears.
2. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

```
CONFIGURATION MENU
Quit from Menu
```

3. Press **ENTER**. The printer displays

```
Quit from Menu
Restore Previous Values
```

4. Press **ENTER**. The printer restores the previous values and becomes *not ready*.

Note: Any custom set changes that were made and saved prior to selecting Quit From Menu are not affected by this selection. The new values stored into custom sets remain in place.

Chapter 16. Dual Push Tractor Forms Paths

Introduction	139	Using same forms on both paths (linking)	141
Forms selection.	139	Setting up printer	141
Using different forms on two paths	140	How forms linking works	142
Setting up printer	140	Parking one continuous form and loading another	142
Using path switching.	140	Parking a continuous form	142
Data stream control of path switching	140	Changing the forms path	142
Operator panel control of path switching	141		

Introduction

This chapter contains step-by-step procedures for each paper feeding method.

The 4247 printer can be set up to simultaneously process forms through two push paths, the front push and the rear push. This is called dual push.

There are two ways of using this configuration. The first way is to load the two paths with different forms. The printer can be set up to support two different applications and the printing can be switched between the two forms. See “Using different forms on two paths” on page 140 for more information.

The second way is to load the two paths with the same form. For some specific applications, such as printing reports overnight without running out of forms, you may find using the same form in both paths to be a good solution. The printer can be set up to automatically switch paper sources and keep printing.

Notes:

1. The 4247 Printer can print on various sizes, dimensions, and weights of forms. We recommend that you test all forms for your application before ordering large quantities.
2. We recommend that you test the Park function when you intend to run multiple-part forms. If you notice problems with backing up the forms, try using the Eject function.
3. When your printer is loaded with different forms in the front push and the rear push tractors, your job (or the operator) can select the desired source, and alternate between the two paths. The operator must tear off the forms to allow the printer to change paths.
4. Your printer comes with one forms tractor already installed on the printer. When only this tractor is installed, the settings for the front paper path apply to the paper loaded on this tractor. If instead the second (optional) tractor is installed in the printer, the settings for the front path apply to the paper loaded with the upper tractor, whereas the default tractor becomes the rear tractor.

Forms selection

You might select a forms path based on specific operating needs, frequency of use, and ease of replenishing forms. Other times the forms path you should use is dictated by the type of forms you are printing, such as black-back forms which can only be used on the optional second tractor.

Using different forms on two paths

Setting up printer

Some setup is needed to be able to print on two different form types.

1. Place "form-type-1" on the front tractor pins and "form-type-2" on the rear tractor pins. Do not load the forms up to the print line.
2. Ensure that Continuous Forms Linking = Disabled is set in the Printer Setup section of the Configuration Menu. Disabled is the default value for this setting.
3. Also in the Printer Setup section of the Configuration Menu, set Automatic Eject and Automatic Restore to the values you want, based on the information and descriptions, including the recommended usage tables, in "Controlling Tear Off Operations" on page 110.

Using path switching

The path switching can be controlled either at the operator panel or by the data stream. In either method, manual intervention will be required to tear off the current form if the forms are past the print area when the path switching is initiated. If forms are not past the print area when the path switching is initiated, the path switch will start automatically.

Note: If you are running IPDS applications, such as PSE, path switching is always controlled by the IPDS data stream. Operator panel control of the path switching is not available with these applications.

If the 4247 is being shared by more than one user, data stream controlled switching will probably work best since the timing of operator panel controlled switching with the arrival of the job can get complicated.

Data stream control of path switching

With data stream control of the path switching, some actions are taken by the printer based on the data stream commands received and some based on operator panel keys being pressed.

The following description assumes that the Backup parameter in the Printer Setup section of the Configuration Menu is enabled for the current forms path.

When a path selection command is received at the printer that requires the printer to switch paths, and forms need to be torn off, the message '091 FANFOLD PARK...' will be displayed on the operator panel display. From that point, perform the following:

1. The forms will already have been ejected, so tear off the forms at the form perforation at the tear bar.
2. Press **PARK/PATH** to confirm to the printer that it can proceed with the park operation. The printer will park the forms on the current path then automatically switch to the other path and print the job.

Note: When a path selection command is received at the printer that requires the printer to switch paths, and forms do not need to be torn off, the printer will automatically park the forms on the current path then switch to the other path and print the job.

Operator panel control of path switching

Note: If you are running IPDS applications, such as PSF, path switching is always controlled by the IPDS data stream. Operator panel control of the path switching is not available with these applications. For SCS applications, you may need to enable the Override Host function of the printer in order for the operator panel control of path switching to work.

With operator panel control of the path switching, most actions are taken by the printer only on command from the user pressing keys at the operator panel. Setting Automatic Restore to Disabled is recommended for the most complete operator panel control of path switching.

1. If forms need to be torn off:

The first step you must take depends on the setting for Automatic Eject. See “Using Automatic Eject to Control Forms Eject” on page 111 for more information on these settings.

If Automatic Eject = Disabled (infrequent need for tear off), press **LOAD/EJECT**. The printer will eject the current forms to the tear bar. Tear off the forms at the perforation at the tear bar. Message ‘003 FORMS EJECTED / PRESS LOAD’ will be displayed on the operator panel.

If Automatic Eject = Enabled (frequent need for tear off), the printer will wait 5 seconds after finishing printing before automatically ejecting the forms. After the printer ejects the forms to the tear bar, message ‘003 FORMS EJECTED’ will be displayed on the operator panel. Tear the forms at the perforation at the tear bar.

After having torn the forms, the path switching procedure is the same regardless of the setting of Automatic Eject. The rest of the steps follow:

- a. Press **LOAD/EJECT**. The printer will restore the forms back to the print line.
 - b. Press **PARK/PATH**. The printer will park the forms on the current path.
 - c. Press **PARK/PATH** as many times as needed until the path you want to select is indicated by the message in the middle of the second line of the operator panel display. automatically
 - d. Press the **START** key to make the printer ready for the next job. The forms will be automatically loaded by the printer when the next job is received. Or you can press **LOAD/EJECT** to manually load the forms on the new path then press **START** to make the printer ready for the next job.
2. If forms do not need to be torn off:
- a. Press **PARK/PATH**. The printer will park the forms on the current path.
 - b. Press **PARK/PATH** as many times as needed until the path you want to select is indicated by the message in the middle of the second line of the operator panel display. automatically
 - c. Press **START** to make the printer ready for the next job. The forms will be automatically loaded by the printer when the next job is received. Or you can press **LOAD/EJECT** to manually load the forms on the new path then press **START** to make the printer ready for the next job.

Using same forms on both paths (linking)

Setting up printer

Some setup is needed to use the printer in this way. Perform the following steps.

1. Place the same forms on both front and rear tractors. Place the forms onto the tractor pins. Do not load the forms up to the print line.

2. Set Continuous Forms Linking = Enabled in the Printer Setup section of the Configuration Menu. This tells the printer to automatically switch to the second push path when the first reaches end-of-forms.
3. If the job does not contain the forms path selection commands, use the **PARK/PATH** key, select either Front or Rear as the current path.
4. Press **START** to make the printer Ready.
5. Send your job to the printer.

How forms linking works

When the printer reaches end-of-forms on the current path, it automatically will switch to the second continuous forms path and perform a load operation. If forms are mounted on the tractor pins, printing will continue. If left completely unattended, the printer will print using the second box of forms until either the job is finished or the end-of-forms is reached for the second forms source. The '001 END OF FORMS' message will only be displayed on the operator panel when both of the continuous forms paths are empty.

While the printer is printing on the second path, you could again load forms onto the pins of the first tractor. If you do this, the printer will again switch automatically when it reaches end-of-forms. You can continue doing this indefinitely. As long as forms are loaded on the pins of the other tractor, the printer will automatically switch to that tractor when the current tractor reaches end-of-forms. The '001 END OF FORMS' message will only be displayed on the operator panel when both of the continuous forms paths are empty.

Parking one continuous form and loading another

The 4247 printer can have two continuous forms loaded at the same time. The topics below explain how you can take advantage of this feature and free yourself from having to reload forms when you need to print on a different form.

Parking a continuous form

1. Press **PARK/PATH**. If forms are currently loaded from the Front Push or Rear Push forms paths, the printer displays:

```
091 FANFOLD PARK
TEAR OUTPUT PRESS PARK
```

Or if forms are loaded in the Front Push forms path with **FRONT FORMS BACKUP** set to **DISABLED** or in the Rear Push forms path with **REAR FORMS BACKUP** set to **DISABLED**, the printer displays:

```
092 FANFOLD EJECT
TEAR INPUT PRESS EJECT
```

2. Press **STOP** and perform the action requested on the operator panel display.
3. Press **PARK/PATH** to back the forms below the print line or press **LOAD/EJECT** to eject the last sheet.

Changing the forms path

Select another continuous form as follows:

1. Ensure that a form is in the tractors of the desired alternate forms path.
2. Press **PARK/PATH** again to change the forms path on the operator panel display to the desired alternate forms path.

Chapter 17. Using the Operator Print Tests

General Test Instructions	143	Print Custom Sets	145
Quick Reference	144	Firmware Information	146
Printer demonstration	144	Printer Adjustments	146
Printer Configuration.	144		

This chapter describes the print tests you can perform to:

- Check information on the operator panel keys and the configuration menu.
- Demonstrate printer capabilities
- Check the version code level of your printer
- Check your printer configuration values
- Change and check printer adjustments for each forms path.

Any of these tests can be performed at anytime. However, all tests should be performed when there is no print data buffered and the printer is not processing data. When you use the Operator Print Tests, the printer goes *offline*. When you exit test mode, the printer performs a *partial reset* before going back *online*. This partial reset clears any buffered print data and anything stored in printer storage.

Entering the Operator Print Tests may cause the forms configuration values to be adjusted. If the current values are less than a maximum print position of 72 or a maximum page length of 66, the printer will adjust the values. This is done to ensure correct formatting of all offline customer tests. A form that is at least 210 mm x 297 mm (8.27 x 11.70 in.) is needed to run any of the operator print tests. The original values will be reset when the printer returns to the online state. If the values are larger than the required page dimensions, the values are not changed.

General Test Instructions

To enter the Operator Print Tests menu, press **STOP** to make the printer *not ready*. Press **TEST**. The printer displays

OPERATOR PRINT TESTS Quick Reference

The Quick Reference test is the first test in the Operator Print Tests menu. From this display, press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** to view the other tests. Pressing **ENTER** or **START** begins a test.

While a test is running, pressing **STOP** or **CANCEL PRINT** halts the test. If you press **STOP**, the test is halted and you are still in the Operator Print Tests menu. If you press **CANCEL PRINT**, the printer exits test mode, performs a partial reset, and becomes online *ready*.

When a test is not running, pressing **RETURN** or **CANCEL PRINT** tells the printer to exit test mode and perform a partial reset. If you press **RETURN**, the printer becomes *not ready*. If you press **CANCEL PRINT**, the printer becomes online *ready*.

Quick Reference

The Quick Reference is a popular print test to help familiarize you with the printer operator panel keys and the configuration menu you can set. Each key is shown with a corresponding description to the right. Each parameter is also shown with the corresponding values you can select printed to the right. It does not indicate the default values. See the “Configuration Categories” in Chapter 3, “Checking and changing configuration parameter values,” on page 37 for the default values.

The information is printed in the currently selected display language and it matches the method of attachment for your printer.

To begin the Quick Reference Test:

1. Press **STOP** to make the printer *not ready*.
2. Press **TEST**.

The printer displays

OPERATOR PRINT TESTS Quick Reference

3. Press **ENTER** or **START** to begin the test. The **READY** indicator goes on and printing begins.
4. When the Quick Reference test is complete the **READY** indicator goes off.
5. Press **CANCEL PRINT** to make the printer *ready* or **RETURN** to make the printer *not ready* (see “General Test Instructions” on page 143).

Printer demonstration

You can print samples of all the available print qualities and bar codes by using the Printer Demonstration test.

Note: The 4247 Model Z03 can perform this test without being connected to a computer. This test will only print in the English language.

To begin the printer demonstration:

1. Press **STOP** to make the printer *not ready*.
2. Press **TEST**.
3. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

OPERATOR PRINT TESTS Printer Demonstration

4. Press **ENTER** or **START** to begin the test. The **READY** indicator goes on and printing begins.
5. When the Printer Demonstration test is complete the **READY** indicator goes off.
6. Press **CANCEL PRINT** to make the printer *ready* or **RETURN** to make the printer *not ready* (see “General Test Instructions” on page 143).

Printer Configuration

You can print the current values for each parameter. Here are some considerations:

- Each parameter is shown with its corresponding value printed to the right.

- The category and parameter names are printed in the current display language used on the operator panel.
- The current custom set is noted at the top right column of the configuration printout.
- If you need to verify each custom set, the Operator Print Tests must be run for each custom set.
- The custom set must be changed in the configuration menu before running each configuration printout, see “Recall custom set values” on page 51.
- A flag (****) is printed after each parameter value that is different from the factory default value.

Printer configurations can be checked by entering the configuration menu.

To print the printer configuration:

1. Press **STOP** to make the printer *not ready*.
2. Press **TEST**.
3. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the printer displays

```
OPERATOR PRINT TESTS
Printer Configuration
```

4. Press **ENTER** or **START** to begin the test.
The **READY** indicator goes on and printing begins. The printout shows the current configuration. The configuration printout is complete when the **READY** indicator goes off.
5. Press **CANCEL PRINT** to make the printer *ready* or **RETURN** to make the printer *not ready* (see “General Test Instructions” on page 143).

Print Custom Sets

Use this function to create a printout of the eight custom set values.

On the first page of the printout, each custom set is identified as either In Use or as Factory Defaults.

In Use At least one value in the custom set is different from the factory default value. A flag (****) is printed after each parameter value that is different from the factory default.

Factory Defaults A custom set that is identical to one of the factory defaults.

If a custom set is identical to the factory defaults, it will be identified as Factory Defaults. If the only change from factory defaults is a non-custom set parameter value (a value that stays the same no matter which custom set you are using), only the first custom set will be identified as In Use. The other custom sets will be shown as factory defaults.

To print the custom sets:

1. Press **STOP** to make the printer *not ready*.
2. Press **TEST**.
3. Press **SCROLL/MICRO**↑ or **SCROLL/MICRO**↓ until the printer displays

```
OPERATOR PRINT TESTS
Print Custom Sets
```

4. Use **ENTER** or **START** to begin the test. The printout will list all the custom sets.
The Ready indicator is lighted and the Print Test prints. The printout is complete when the Ready indicator is no longer lighted.
5. Press **CANCEL PRINT** to make the printer *ready*, or **RETURN** to make the printer *not ready*.

Firmware Information

You can print information to verify your printer model number and the microcode level installed in your printer. You will need this information if problems occur with your printer and you need to contact your service representative.

To check the Firmware Information:

1. Press **STOP** to make the printer *not ready*.
2. Press **TEST**.
3. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

OPERATOR PRINT TESTS Firmware Information
--

4. Press **ENTER** or **START** to begin the test.
The **READY** indicator goes on and printing begins. The firmware printout is complete when the **READY** indicator goes off.
5. Press **CANCEL PRINT** to make the printer *ready* or **RETURN** to make the printer *not ready* (see “General Test Instructions” on page 143).

Printer Adjustments

You can make adjustments to your printer to maintain print quality. The adjustments can be set and then tested by running a print test without having to exit the menu. There is a set of printer adjustment parameters for each forms path: Front or Rear. Chapter 9, “Printer Adjustments,” on page 119 describes the procedures for checking and changing the values of the printer adjustments. The following are the available printer adjustment parameters:

- Front Automatic Forms Thickness Adjustment (AFTA)
- Front Tear Position
- Front Left Margin Alignment
- Front Paper Load Position
- Rear Automatic Forms Thickness Adjustment (AFTA)
- Rear Tear Position
- Rear Left Margin Alignment
- Rear Paper Load Position
- Bidirectional Adjustment (Available only in Operator Print Test Menu)
- Sensor Tune (Available only in Operator Print Test Menu)
- Quit From Menu (Available only in Operator Print Test Menu)

To check or change printer adjustments:

1. Press **STOP** to make the printer *not ready*.
2. Press **TEST**.
3. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the printer displays

OPERATOR PRINT TESTS Printer Adjustments

4. Press **ENTER**.
5. Press **SCROLL/MICRO↑** or **SCROLL/MICRO↓** until the desired value for Printer Adjustments is displayed.
6. Press **ENTER** and change the values you wish to change.
7. Press **START** to run a print test for acceptable quality and alignment.
If the quality is not acceptable, return to Step 4, otherwise, continue.
8. Press **FORM FEED** to see what you printed.
9. Press **CANCEL PRINT** to make the printer *ready* or **RETURN** to make the printer *not ready* (see “General Test Instructions” on page 143).

Chapter 18. Supplies, optional features, and maintenance

Continuous forms specifications	149	Maintenance.	152
Forms stacking recommendations	150	Removing the ribbon cartridge	152
Forms stack input and output locations	150	Cleaning the Printer	152
Supplies	151	Cleaning Inside the Printer	153
Optional features	151	Cleaning the Outside Covers	153

Continuous forms specifications

The 4247 Model Z03 operates with continuous forms. All forms should be evaluated in the printer's functional environment for forms handling, print registration, and print quality acceptability prior to use. The forms must meet the following specifications:

Paper Criteria	Characteristics	Continuous Forms
		Front Push, Rear Push
Dimensions	Width	76.2 to 431.8 mm 3 to 17 in.
	Length	76.2 to 609.6 mm 3 to 24 in.
Single Part	Weight	55 to 150 g/m ² 15 to 40 lb
	Thickness	0.08 to 0.635 mm 0.003 to 0.025 in.
Multiple Part	Maximum parts (Original + Copies)	1 + 7 Chemical 1 + 5 Carbon Paper
	Overall Thickness	0.08 to 0.635 mm 0.003 to 0.025 in.
	Weight of top part	55 to 150 g/m ² 15 to 40 lb
	Attached sheet individual weight	45 to 75 g/m ² 12 to 20 lb
	Carbon paper individual weight	14 to 35 g/m ² 4 to 9 lb

Notes:

1. Test forms less than 152.4 mm (6 in.) in length or width for satisfactory stacking. These forms may require additional operator attention.
2. For optimum performance, restrict the printable area to be within 6.4 mm (0.25 in.) from all edges, holes, or folds on the forms.

3. Some multiple-part forms (such as mailers, thick/heavy perforations) may cause problems when using the Park function. Try the forms first. To minimize parking problems, discuss your needs with your forms supplier when selecting forms.
4. We do not recommend continuous forms with adhesive labels.
5. To prevent the separation of labels from continuous-forms when using the **Eject** or **Park** keys, set FRONT FORMS BACKUP=DISABLED or REAR FORMS BACKUP=DISABLED in the Power On Configuration menu. Making this configuration change does the following:
 - Disables the **Eject** key tear-off function
 - Modifies how the **Park** key works for forms in the Front Push and Rear Push forms paths. You cannot back up the forms to park them. Break the forms at a perforation before they enter the printer. Press **Park** twice, and the forms will move forward until ejected from the printer.
6. Black-back forms cannot be used in the default tractor. They can only be used in the optional second tractor.

Forms stacking recommendations

We recommend the following maximum stacking height when stacking continuous forms on the same work surface as the printer.

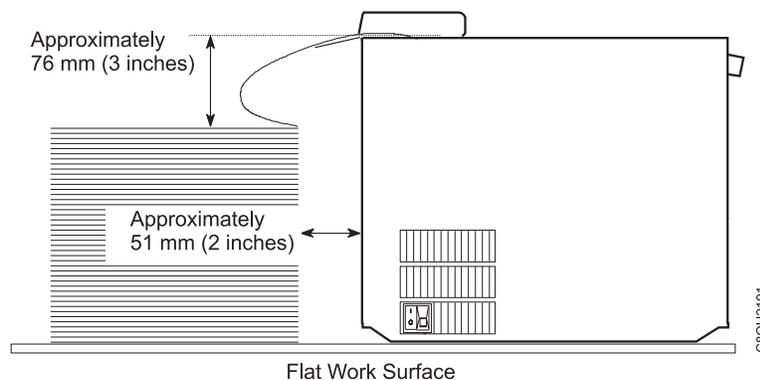


Figure 40. Forms stacking recommendations

Forms stack input and output locations

Depending on which forms path you are using, see the diagrams on the following pages for ways to stack input and output forms for your printer.

For satisfactory stacking results, the distance from the printer stand to the floor should be 736 to 762 mm (29 to 30 in.) and the distance between the shelf and the floor should be 381 mm (15 in.). We offers an optional printer stand for your 4247 Printer. For more information on this printer stand, contact your marketing representative.

Note: For successful forms parking, the input forms stack **MUST** always be lower than the printer.

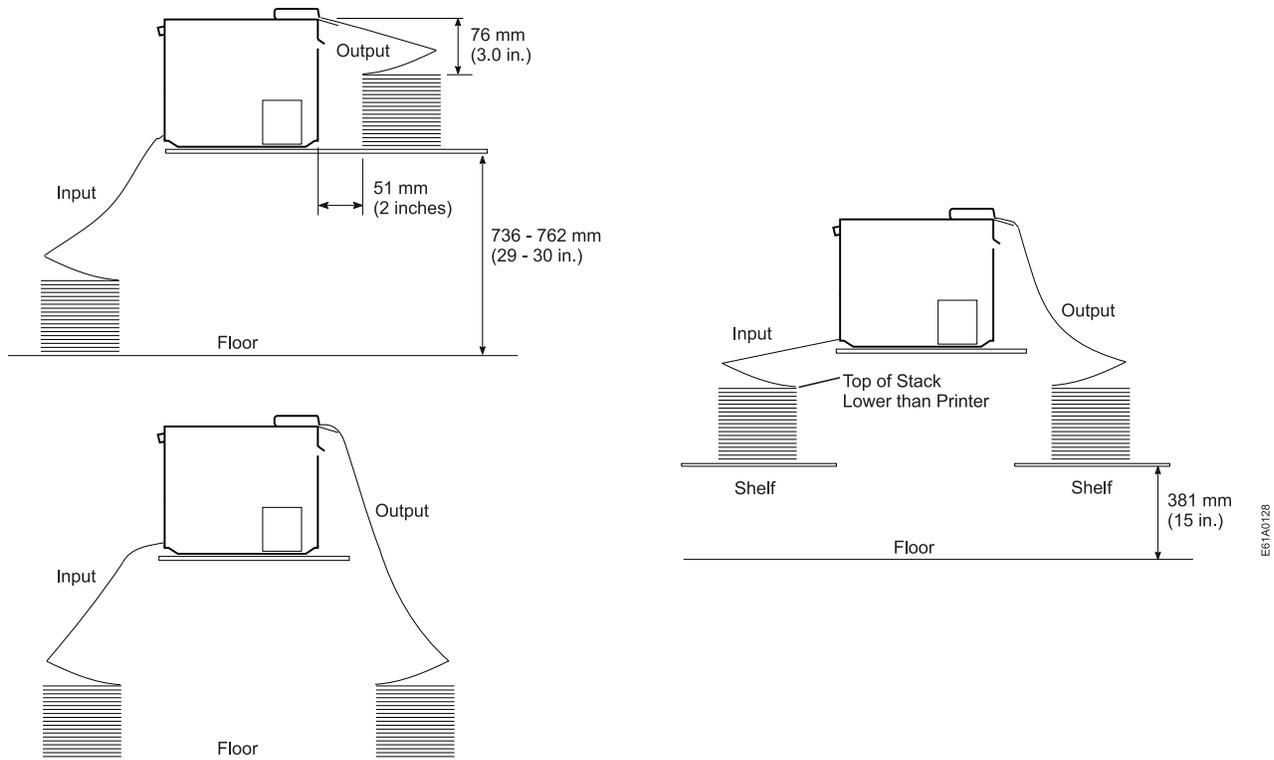


Figure 41. Forms stacking recommendations

Supplies

Ribbon cartridges and paper are the only supplies you need for your printer.

Use part number **57P1743** when ordering a replacement ribbon cartridge.

Optional features

Option	Description
Printer Stand	There are two printer stand options: <ul style="list-style-type: none"> • Enclosed paper shelf cabinet printer stand • Open paper shelf printer stand
Second forms tractor	An optional second tractor can be installed. In this way it is possible to handle two different types of fanfold paper simultaneously with the printer.
Controller Board	There are three Controller Board options: <ol style="list-style-type: none"> 1. Allows a host connection to parallel, serial, and USB 2.0 interfaces. 2. Allows a host connection to parallel and ASCII Ethernet 10/100 BaseT LAN network interfaces. 3. Allows a host connection to parallel and ASCII-IPDS Ethernet 10/100 BaseT LAN network interfaces

Maintenance

Removing the ribbon cartridge

Attention: Damage to the printer can occur if you do not use an approved ribbon (part number 57P1743) especially designed for the 4247 Model Z03 printer.



CAUTION:

<2-25> High temperature; switch off the printer and allow at least 20 minutes for parts in this area to cool before handling.

To remove an existing ribbon cartridge, follow these steps:

1. Open the printer top cover.
2. Slide the printhead to the center of the printer.
3. Slide the ribbon guide out of the printhead.
4. Free the shifter holder by pushing the tab towards the rear and pulling the shifter holder up.

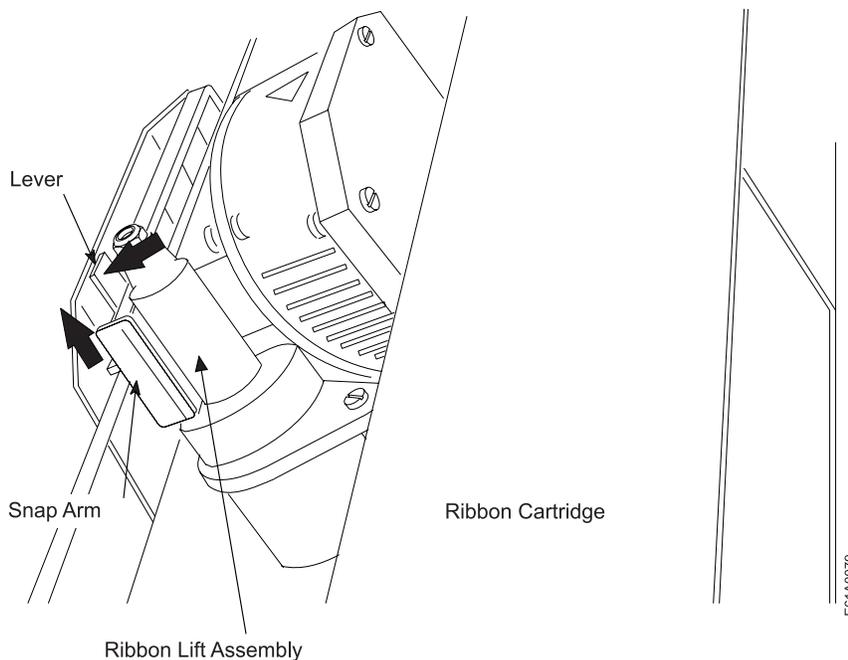


Figure 42. Freeing the shifter holder

5. Now you are ready to insert the new ribbon cartridge (see “Installing the ribbon cartridge” on page 12).

Cleaning the Printer



CAUTION:

<2-25> High temperature; switch off the printer and allow at least 20 minutes for parts in this area to cool before handling.

**CAUTION:**

<2-22> Carefully follow all cleaning instructions, using only the materials and solutions recommended.

Periodic cleaning will help keep your printer in top condition so that it will always provide optimal performance.

Before you clean the printer:

1. Power off (O) the printer.
2. Unplug the power cord.
3. Wait at least 15 minutes for the printhead to cool before starting this procedure.

Cleaning Inside the Printer

Every few months, use a soft brush and a vacuum cleaner to remove dust, ribbon lint, and pieces of paper. Remove the ribbon cartridge to prevent the ribbon from going into the vacuum cleaner. Vacuum any dust from around the printhead and in the printer cavity.

Attention: Do not allow any staples, paper clips, or small metal pieces to fall inside the printer.

Cleaning the Outside Covers

Clean the outside of the printer with a damp cloth and mild soap. Do not use any spray-type or chemical cleaners anywhere on your printer. Do not put any liquids or spray near the air vents. For stubborn ink stains on the cover, use a commercial mechanic's hand cleaner.

Do not use an abrasive cloth, alcohol, paint thinner, or similar agents because they may cause discoloration or scratching.

Chapter 19. Problem Solving

Using Status Code and Problem Listings	155	Forms problems	163
Status Code and Messages Displays	155	Print quality and ribbon problems	164
No Status Code Displays	155	Configuration problems	166
Status codes and recovery actions	156	Miscellaneous problems	166
Problem list index	160	Clearing Forms Jams	166

When the printer displays a status code, you need to know what action to take to recover from the displayed condition. This chapter lists the status codes and recovery actions and gives a list of problems, probable causes, and recovery actions for problems that do not display a status code. As with any problem, if you can not correct the situation after performing the recovery action, call or service.

Using Status Code and Problem Listings

When a problem with the printer occurs, the printer displays a status code and message. The message on the display identifies the problem and gives a recommended action.

Status Code and Messages Displays

Find the code listed in numeric order on the following pages and perform the steps to fix the problem. Only codes on which an operator can take action are included.

Note: If you get a code that you cannot find in this section, record the code and run the job again. If you get the same code, call for service.

No Status Code Displays

Scan the “Problem list index” on page 160 and go to the page listed beside the problem. Find your problem in the chart, read down the page to the “Solution” and perform the recommended recovery action. If you still cannot correct the situation, turn off the printer, wait 10 seconds, and turn on the printer. If the problem persists, call for service

Status codes and recovery actions

Display Message	Recovery Action
001 END OF FORMS LOAD FORMS An end-of-forms condition exists in one of the forms paths.	Action 1 <ol style="list-style-type: none"> 1. Press STOP to silence the alarm. 2. Load forms in the appropriate forms path. 3. Press LOAD/EJECT. 4. Press START. Action 2 If the message displays again, verify that the left hand edge of the form is not aligned past the 22 nd spacer on the printer cabinet. Adjust the form so that it is further to the left inside the 22 nd spacer on the printer base (see "Loading fanfold paper" on page 17). Action 3 If the message displays again, remove the forms and tune the paper presence sensor. See "Sensor Tune" in Chapter 9, "Printer Adjustments," on page 119.
002 FORMS JAMMED FRONT CLEAR JAM RELOAD FORMS	<ol style="list-style-type: none"> 1. Press STOP to silence the alarm. The message remains in the display. 2. Clear the jammed or torn form. If the paper is difficult to remove from the printhead area, rotate the AFTA wheel (located on the left side under the ribbon cartridge) to a higher number to clear the jam. 3. Reload forms onto the tractor. 4. Close the top cover. 5. Press LOAD/EJECT to load forms. 6. Press START to restart the print job. If the message displays again, perform the actions under "Forms buckle, twist, jam, or tractor holes tear" on page 163.
003 FORMS EJECTED PRESS LOAD	Auto Restore is set to Disabled and an Eject has moved the form up to the Tear Bar. The printer is waiting. This is most likely to occur during a tear off operation. Tear the forms at the perforation at the Tear Bar. Then a manual Restore must be done by pressing LOAD/EJECT . If the Processing light is blinking, the next job has already been received and is pending.
003 FORMS EJECTED	Auto Restore is set to Data or Timer and an Eject has moved the form up to the Tear Bar. The printer will restore the form automatically either when the next job is received (Auto Restore = Data) or after a defined time elapses (Auto Restore = Timer).
005 MARGIN ERROR ADJ MARGIN/LINE LENGTH	<ol style="list-style-type: none"> 1. Press STOP. The left margin automatically resets to 10 units (see Chapter 9, "Printer Adjustments," on page 119). 2. Press START.
009 INVALID KEY PRESS 009 INVALID KEY PRESSES 009 INVALID KEY PRESS PRESS STOP FIRST	<ol style="list-style-type: none"> 1. Check the operator panel function. 2. Reenter the correct operation. See Chapter 3, "Checking and changing configuration parameter values," on page 37.

Display Message	Recovery Action
<p>014 INVALID FORMS SELECT ADD PATH OR PRESS START</p> <p>014 XXXXXXXX ADD PATH OR PRESS START</p> <p>The device requested by the job being sent is not installed in the printer. The above messages alternate at one second intervals where XXXXXXXX tells the requested forms device which can be Front or Rear.</p>	<ol style="list-style-type: none"> 1. To print the job with the requested paper source: <ol style="list-style-type: none"> a. Turn off the printer. b. Install the desired forms device. c. Turn on the printer. d. Resubmit the print job. 2. To cancel the job now and resubmit the job later with the correct device installed: <ol style="list-style-type: none"> a. Press STOP. b. Press CANCEL PRINT. 3. To print the job with an available paper source: <ol style="list-style-type: none"> a. Press STOP. b. Press PARK/PATH. c. Select an available forms path. d. Press START. 4. To print the job with the current paper source: <ol style="list-style-type: none"> a. Press STOP. b. Press START.
<p>020 FORMS JAMMED REAR CLEAR JAM RELOAD FORMS</p>	<ol style="list-style-type: none"> 1. Press STOP to silence the alarm. The message remains in the display. 2. Clear the jammed or torn form. If paper is difficult to remove from the printhead area, note the setting on the AFTA wheel, rotate the AFTA wheel to a higher number to clear the jam, and return the AFTA wheel to the original setting. 3. Reload forms onto the tractor. 4. Close the top cover. 5. Press LOAD/EJECT to load forms. 6. Press START to restart the job. 7. If the message displays again, perform the actions under "Forms buckle, twist, jam, or tear."
<p>026 HEX PRINT ACTIVE</p>	<ol style="list-style-type: none"> 1. Press START. <p>All data will print in hexadecimal code until you press STOP.</p>
<p>050 MACHINE CHECK X Y Z SEE USER'S GUIDE</p> <p>051 MACHINE CHECK X Y Z SEE USER'S GUIDE</p> <p>052 MACHINE CHECK X Y Z SEE USER'S GUIDE</p> <p>053 MACHINE CHECK X Y Z SEE USER'S GUIDE</p> <p>054 MACHINE CHECK SEE USER'S GUIDE</p> <p>055 MACHINE CHECK SEE USER'S GUIDE</p> <p>056 MACHINE CHECK SEE USER'S GUIDE</p> <p>An unrecoverable error has occurred. Record the error information X, Y, Z.</p>	<ol style="list-style-type: none"> 1. Turn off the printer. 2. Wait 10 seconds, then turn on the printer. 3. If the printer displays this status code again, call for service.

Display Message	Recovery Action
059 CANCEL PRINT ACTIVE This an informational message. The printer displays this message after you press CANCEL PRINT .	1. Press START to cancel the current print job or press CANCEL PRINT again (before pressing START) to return the printer to READY . (The print job will not be cancelled.)
068 DATA CLEARED PRESS STOP THEN START	1. Press STOP . 2. Press START .
070 PRINTER BOARD CHANGE VERIFY MENU SETTINGS Configuration and custom sets values may have been lost when the printer board was modified.	1. Press STOP . 2. Press MENU . 3. Verify the configuration values and custom sets. (See Chapter 3, "Checking and changing configuration parameter values," on page 37 and "Custom sets" on page 49 "Custom sets".) 4. Press START or RETURN to exit the menu. If the printer displays this status code again, call for service..
088 INVALID PAPER SOURCE USE FRONT OR CHANGE MENU Incorrect Power On Paper Source selected in configuration. Change the configuration to an available paper source.	1. Press STOP . 2. See "Attaching the 4247 Printer to your computer" on page 25.
089 RIBBON JAM CHECK RIBBON	1. Turn off the printer. 2. Remove the ribbon cartridge. 3. Turn the ribbon advance knob to be sure that the ribbon is advancing correctly. If the ribbon does not advance correctly, replace the ribbon cartridge. 4. Reinstall the ribbon (see "Installing the ribbon cartridge" on page 12). 5. Turn on the printer. 6. If the printer this status code again, call for service.
091 FANFOLD PARK TEAR OUTPUT PRESS PARK	1. Tear off the forms at the perforation before entry into the printer. 2. Press LOAD/EJECT .
092 FANFOLD EJECT TEAR INPUT PRESS EJECT	1. Tear off the forms at the perforation. 2. Press PARK/PATH .
093 EJECT PENDING	This is an informational message. The printer displays this message after you press LOAD/EJECT to eject the forms when Continuous Forms Eject Mode is set to Delayed Eject (see "Printer setup" on page 45). The printer displays 003 FORMS EJECTED/PRESS LOAD after the forms are ejected.
095 OPTION NOT AVAILABLE CHANGE PRINT LANGUAGE	1. Press STOP . 2. Change the Print Language value in the Configuration Menu category to something other than OCR-A or OCR-B .
096 NOT READY COVER OPEN	1. Close the printer top cover. 2. Press START to make the printer READY .
097 FUNCTION DISABLED MENU LOCKED This message is displayed when Menu is pressed when the Menu Lock feature is enabled.	Contact your system programmer.

Display Message	Recovery Action
<p>099 FORMS JAMMED CLEAR JAM PRESS START</p> <p>The printer has detected paper in one of the paper paths. This often occurs if you press PARK/PATH before tearing off the forms.</p>	<p>This detection of unexpected forms was done by one of these paper presence sensors located near the platen:</p> <ul style="list-style-type: none"> • Front forms path • Rear forms path • If you had just pressed LOAD/EJECT or were printing when printing unexpectedly stopped, proceed with <i>Corrective Action 1</i>. • If you had just pressed PARK/PATH with the 091 FANFOLD PARK... message, proceed with <i>Corrective Action 2</i>.
<p>099 FORMS JAMMED CLEAR JAM PRESS START</p> <p>The printer has detected paper in one of the paper paths. This often occurs if you press PARK/PATH before tearing off the forms.</p>	<p><i>Corrective Action 1</i></p> <p>An extra form, a torn piece of form, or paper chad is located in the forms path when there should be no paper present. Remove this paper to clear the 099 message.</p> <ol style="list-style-type: none"> 1. Remove the forms from the appropriate tractor. 2. Remove any pieces of paper, paper chad, or paper dust with puffs of blown air from the sensors located approximately 3 inches from the left end of the platen.
<p>099 FORMS JAMMED CLEAR JAM PRESS START</p> <p>The printer has detected paper in one of the paper paths. This often occurs if you press PARK/PATH before tearing off the forms.</p>	<p><i>Corrective Action 2</i></p> <p>099 message during a Park operation</p> <p>The Park operation, initiated with the PARK/PATH key and 091 FANFOLD PARK... message, requires that any fanfold forms above the tear bar be torn off before confirming the Park operation with a second press of PARK/PATH. Failure to tear off forms may result in the 099 message indicating that the forms have backed up a certain distance but were not detected as being back on the tractor.</p> <ol style="list-style-type: none"> 1. Press STOP once. The 099 message will change back to the 091 FANFOLD PARK... message. 2. Press STOP a second time. The 099 message remains on the display but the alarm will stop. 3. Open the top cover. 4. Tear off at any form perforation above the carriage or printhead. 5. Close the top cover. 6. Press PARK/PATH once. The park operation will restart. If the 099 message returns, the forms have been backed up a certain distance but the printer again did not detect that the forms are back on the tractor. Repeat the steps for <i>Corrective Action 2</i>. If the path has been successfully cleared, the forms will be parked.
<p>220 SERIAL DSR ERROR SEE USER'S GUIDE</p> <p>A remote connection serial interface error occurred.</p>	<ol style="list-style-type: none"> 1. Turn off the printer. 2. Ensure the interface cable is connected to the printer and to the modem. 3. Ensure the serial configuration parameters are set correctly (see "ASCII Configuration" on page 42). 4. Turn on the printer.
<p>221 SERIAL OVERFLOW SEE USER'S GUIDE</p> <p>A serial input buffer overflow error was detected. (Data has been lost.)</p>	<ol style="list-style-type: none"> 1. Press STOP to clear the message. 2. Compare the SERIAL PACING PROTOCOL value that is set in the printer to the pacing protocol of the host system (see "Pacing Control" on page 98). 3. Restart the print job

Problem list index

1. Forms problems index

“Forms buckle, twist, jam, or tractor holes tear”

“Forms do not feed past printhead”

“Forms do not stack correctly”

“Characters are off registration” on page 161

2. Print quality and ribbon problems index

“Unreadable characters” on page 161

“Missing dots or irregular characters” on page 161

“Ribbon smudging forms” on page 161

“Printing is too light or partial characters print” on page 161

“Ribbon snagging, tearing, or not moving” on page 161

“Line-to-line horizontal misregistration” on page 162

3. Configuration problems index

“Printer doesn't print or prints wrong characters” on page 162

4. Miscellaneous problems index

“Printer has no power” on page 162

“Throughput of printer at half speed” on page 162

1. Forms problems index

Table 17. Forms buckle, twist, jam, or tractor holes tear

Problem	Page
Right tractor adjusted incorrectly	163
Printer is not at edge of the table	163
Forms supply too high	163
Forms supply not aligned with printer	163
Forms catching on carton edge.	163
Ribbon twisted or folded	163
Form contains excessive moisture	163
Forms seem defective	163

Table 18. Forms do not feed past printhead

Problem	Page
Change AFTA setting	163
Ribbon twisted or folded	163
Using thick, multi-part forms	163

Table 19. Forms do not stack correctly

Problem	Page
Forms do not stack correctly (table)	164
Forms do not stack correctly (rack)	164
The forms do not meet specifications.	164
Forms contain excessive moisture	164
Forms too dry	164

Table 20. Characters off registration

Problem	Page
First print position is adjusted incorrectly	164

2. Print quality and ribbon problems index

Table 21. Unreadable characters

Problem	Page
Ribbon dry or worn	164
AFTA setting needs decreasing	164
Poor quality multiple-part forms	164
Bidirectional adjustment needs to be made	164
Forms thickness exceeds forms specifications.	164

Table 22. Missing dots or irregular characters

Problem	Page
Ribbon worn	165
Ribbon twisted or folded	165
AFTA setting needs to be changed	165

Table 23. Ribbon smudging forms

Problem	Page
Ribbon twisted or folded	165
AFTA setting needs to be increased	165
Ribbon cartridge defective	165
Ribbon over inked	165

Table 24. Printing is too light or partial characters print

Problem	Page
AFTA setting needs to be changed	165
Ribbon guide not correct	165

Table 25. Ribbon snagging, tearing, or not moving

Problem	Page
Ribbon worn	166
Ribbon cartridge not properly installed	166

Table 26. Line-to-line horizontal misregistration

Problem	Page
Dot registration not aligned	166

3. Configuration problems index

Table 27. Printer doesn't print or prints wrong characters

Problem	Page
Printer doesn't print or prints wrong characters	166

4. Miscellaneous problems index

Table 28. Printer has no power

Problem	Page
Power cord not connected	166

Table 29. Throughput of printer at half speed

Problem	Page
Quiet Print function is set on	166

Forms problems

Causes are listed for each problem in order of priority.

Problem: Forms buckle, twist, jam, or tractor holes tear

- 1: The right tractor is adjusted incorrectly.
Solution: Move the right tractor to obtain proper forms tension. The tractor pins should be in the center of the tractor holes.
- 2: The printer is not at the edge of the table.
Solution: Move the printer to the front edge of the table if having problems with front forms path or move the printer to the rear edge of the table if having problems with the rear forms path.
- 3: The forms supply is not below the level of the printer.
Solution: Move the forms supply to the floor or on a shelf below the level of the printer.
- 4: The forms supply is not aligned with the printer.
Solution: Reposition the forms supply so that the forms feed evenly.
- 5: The forms are catching on the carton edge.
Solution: Remove the uneven carton edges, or remove the forms from the carton.

Note: As the forms reach the bottom of the box, this problem can occur more often.
- 6: The ribbon is twisted or folded.
Solution: Check the ribbon for folds or twists.
- 7: The forms contain excessive moisture.
Solution: Store the forms in a cool, dry place before using them, or store the forms in the printer area for 24 hours.
- 8: The forms are defective or do not meet specifications.
Solution: Try unloading the forms and then reloading forms. Forms should meet the requirements specified under Chapter 18, "Supplies, optional features, and maintenance," on page 149.

Problem: Forms do not feed past printhead

- 1: The Automatic Forms Thickness Adjustment (AFTA) setting for the paper source you are using needs to be changed.
Solution: See the procedure for adjusting the forms thickness setting through the operator panel under Chapter 9, "Printer Adjustments," on page 119.
- 2: The ribbon is twisting or folding.
Solution: Replace the ribbon.
- 3: You are using thick multiple-part forms.
Solution: See the procedure for setting perforation safety to *Enabled* through the operator panel (see Chapter 8, "Printer Setup," on page 107).

Problem: Forms do not stack correctly

- 1: The forms do not stack correctly on the table behind the printer.
Solution: Use the recommended table size (see Appendix A, "Printer Specifications," on page 169).

Note: Up to 101.6 mm (4 in.) of forms may stack on the table behind the printer without decreasing the ability of the forms to stack correctly.
- 2: The forms do not stack correctly in the output rack on the table.
Solution: Check for obstructions to the forms path (cables, cords, or other items). If you find an obstruction, remove or relocate it.
- 3: The forms do not meet specifications.
Solution: The forms may be outside nominal specifications (see Chapter 18, "Supplies, optional features, and maintenance," on page 149).
- 4: The forms contain excessive moisture.
Solution: Store the forms in a cool, dry place before using them or leave in the printer for 24 hours.

Note: Forms stack best when the forms are 203.2 to 304.8 mm (8 to 12 in.) long. If the forms length is outside this range, operator assistance may be needed.
- 5: Forms are too dry.
Solution: Condition the forms for 24 hours or more at the manufacturer recommended temperature and humidity settings.

Problem: Characters are off registration

- 1: The first print position is adjusted incorrectly.
Solution: Check your settings for the left margin, tear position, and the paper load position (see Appendix A, "Printer Specifications," on page 169).

Print quality and ribbon problems

Problem: Unreadable characters

- 1: The ribbon is dry or worn.
Solution: Check the ribbon and replace it if it is dry or worn.
- 2: The Automatic Forms Thickness Adjustment (AFTA) setting for the paper source you are using needs to be decreased. Paper must be loaded for this adjustment to be effective.
Solution: See the procedure for adjusting the forms thickness setting through the operator panel (see Chapter 9, "Printer Adjustments," on page 119).
- 3: Poor quality multiple-part forms.
Solution: Try new forms (Fast Draft)
- 4: Bidirectional adjustment needs to be made.
Solution: See the procedure for setting the bidirectional adjustment (see "Bidirectional Adjustment" on page 124).
- 5: Forms thickness exceeds forms specifications.

Solution: Use forms that meet specifications (see “Continuous forms specifications” on page 149).

Problem: Missing dots or irregular characters

1: The ribbon is worn.

Solution: Check the ribbon for wear; replace it if necessary.

2: The ribbon is twisted or folded.

Solution: Straighten the ribbon.

3: The Automatic Forms Thickness Adjustment (AFTA) setting for the paper source you are using needs to be changed. Paper must be loaded for this adjustment to be effective.

Solution: See the procedure for adjusting the forms thickness setting through the operator panel (see Chapter 9, “Printer Adjustments,” on page 119).

Problem: Ribbon smudging forms



CAUTION:

<2-25> High temperature; switch off the printer and allow at least 20 minutes for parts in this area to cool before handling.

1: The ribbon is twisted or folded.

Solution: Try moving the printhead back and forth while turning the ribbon advance knob. If the ribbon advance knob does not turn, replace the ribbon.

2: The Automatic Forms Thickness Adjustment (AFTA) setting for the paper source you are using needs to be increased. Paper must be loaded for this adjustment to be effective.

Solution: See the procedure for adjusting the forms thickness setting through the operator panel (see Chapter 9, “Printer Adjustments,” on page 119).

3: The ribbon cartridge is defective.

Solution: Replace the ribbon cartridge.

4: A new ribbon is over-inked.

Solution: Replace the ribbon.

Problem: Printing is too light or partial characters print

1: The Automatic Forms Thickness Adjustment (AFTA) setting for the paper source you are using needs to be changed. Do not attempt to manually move the AFTA wheel. Paper must be loaded for this adjustment to be effective.

Solution: See the procedure for adjusting the forms thickness setting through the operator panel (see Chapter 9, “Printer Adjustments,” on page 119).

2: The ribbon guide is seated incorrectly or the white snap arm is not snapped into place.

Solution: Remove the ribbon and reinstall it.

Problem: Ribbon snagging, tearing, or not moving

1: The ribbon is worn.

Solution: Replace the ribbon cartridge.

2: The ribbon cartridge is not properly installed.

Solution: Remove and then reinstall the same ribbon.

Problem: Line-to-line horizontal misregistration

1: The dot registration of the characters printed is not aligned.

Solution: See Chapter 9, "Printer Adjustments," on page 119.

Configuration problems

Problem: Printer doesn't print or prints wrong characters

1: Nothing is printed or the wrong characters print.

Solution:

- Ensure the printer cable is attached to the host.
- Check the configuration menu parameter values for your printer attachment (see Chapter 7, "ASCII Configuration," on page 71).

Miscellaneous problems

Problem: Printer has no power

1: The power cord is not connected.

Solution: Ensure the power cord is plug into the back of the printer and also into the wall outlet.

Problem: Throughput of printer at half speed

2: The Quiet Print function is set on.

Solution: Ensure the "Quiet Print" function in the Printer Configuration menu is disabled.

Clearing Forms Jams

Use the following procedure to clear forms jams from the printer.

1. Open the top cover.
2. Tear off the forms at perforations before it enters the printer and after it exits the printer.
3. Open the tractor doors and remove forms from the tractors.
4. Try to move the printhead off of the form and to the far right. **Do not force it.**
5. Remove jammed forms by pulling in the direction of printing.
6. If the jam cannot be removed, lightly pull the form in the opposite direction.
7. If the jam still cannot be removed, remove the bail assembly (if it is present):
 - a. Open the forms guide.
 - b. Remove the ribbon cartridge. (See "Removing the ribbon cartridge" on page 152.)
 - c. Grip the bail assembly as shown in the following illustration. Rotate it toward the front of the printer until the pivot posts on the sides disengage from the printer frame.

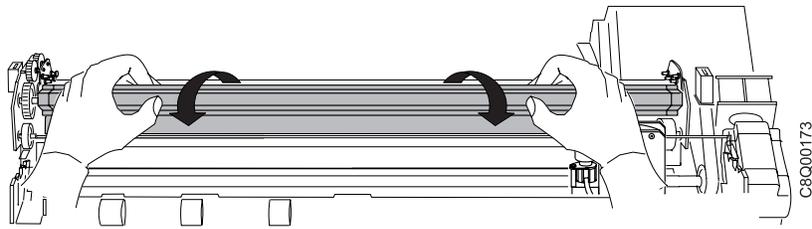


Figure 43. Rotating the bail assembly

- d. Lift the bail assembly out of the printer and set it aside.
- e. Remove jammed forms by pulling in the direction of printing.
8. If you removed the paper bail assembly in the previous step, reinstall it, as follows:
 - a. Grip the bail assembly as shown in the following illustration.

Important!

To avoid damaging the plastic, ensure the plastic points down.

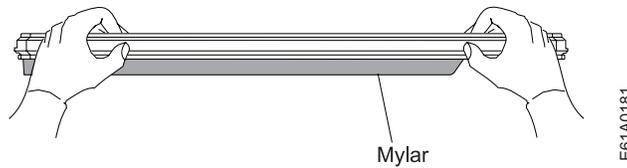


Figure 44. Gripping the bail assembly

- b. Insert the left and right paper bail end cap pivots into the side frames.

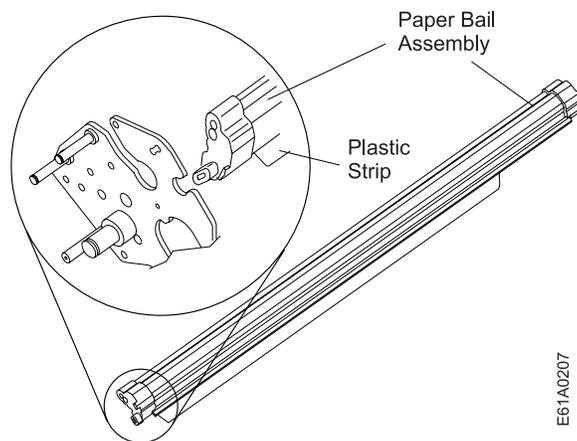


Figure 45. Inserting the left and right paper bail end caps

- c. Rotate the paper bail assembly toward the back of the printer, closing it as far as it will go.
- d. Reinstall the ribbon cartridge.
- e. Close the forms guide.
9. Reload the forms.

Appendix A. Printer Specifications

General information	169	RS-232C connector pin assignments	173
Operating and service clearance	170	The LAN Interface	174
Physical dimensions and minimum clearances	170	LED Indicators	174
Weight	170	Environmental requirements	174
Power consumption	170	Operating environment	174
Heat output	171	Shipping environment	174
Airflow	171	Storage environment	175
Declaration of Product Noise Emission Values	171	Electrical requirements	175
The Parallel Interface	172	Power cord	175
Parallel connector pin assignments	172	Safety	176
The Serial Interface	173	Branch circuits and grounding.	176

General information


The site that you select for your new printer must meet the specifications and conditions shown on the following pages.

As you consider the location and surrounding environment for your printer, avoid factors that can create a buildup of an electrostatic charge on the printer. While not harmful, an electrostatic discharge can cause discomfort to persons. Such discharges also can cause problems with printer operation or to the machines to which the printer connects. Some factors to avoid that can cause an electrostatic charge to build are:

- Floor surfaces with low resistance to electrical charges
- Carpeting without antistatic properties
- Plastic seat coverings
- Metal-frame furniture
- Low-humidity environment

If the printer is set up on a raised floor, you may need to provide an access area for the cord and cables that exit at the rear of the printer.

For reliable form feeding and forms handling, We recommend a printer stand or table that is approximately 381 mm (15 in.) deep, at least 762 mm (30 in.) wide, and 762 mm (30 in.) high. The shelf should be approximately 381 mm (15 in.) from the floor. We offer an optional printer stand for the 4247 Printer. For more information on this printer stand, contact your marketing representative.



CAUTION:
<2-81> The 4247 Model Z03 printer has an optional printer pedestal. If the printer is installed on any other stand or surface, this stand or surface must support the printer weight of 33 kg (73 lb) and withstand the print action vibration.

For additional information on stacking, see “Forms stack input and output locations” on page 150.

If you use a table outside this range, you reduce efficiency or stability, and may have to monitor printer operation.

Operating and service clearance


You should provide adequate space for cooling air, and for operating or maintaining the printer. This is also helpful if you will occasionally change the controller board.

Physical dimensions and minimum clearances


Dimensions	Standard
Width:	720 mm (28.35 in.)
Depth:	400 mm (15.75 in.)
Height:	350 mm (13.78 in.)

Clearances	Standard
Top:	280 mm (11.0 in.)
Front:	450 mm (18.0 in.)
Rear:	450 mm (18.0 in.)
Left:	200 mm (9.7 in.)
Right:	200 mm (9.7 in.)

Weight



CAUTION:
<2-82> The 4247 Model Z03 printer weighs 33 kg (73 lb). Two persons are required to lift it.



CAUTION:
<2-81> The 4247 Model Z03 printer has an optional printer pedestal. If the printer is installed on any other stand or surface, this stand or surface must support the printer weight of 33 kg (73 lb) and withstand the print action vibration.

Power consumption

Category	115 V ac 60 Hz	230 V ac 50 Hz
Maximum (Peak)	240 Watts	230 Watts
Operating (Maximum Typical)	160 Watts	155 Watts
Power Saver Mode*	23.5 Watts	22.5 Watts
Idle (Off Mode)	0.1 Watts	0.2 Watts

*Power Saver timeout is 22 seconds.

Heat output

Category	115 V ac 60 Hz	230 V ac 50 Hz
Operating (Maximum Typical)	147 Watts (500 BTU/hr)	141 Watts (480 BTU/hr)
Idle	22 Watts (75 BTU/hr)	22 Watts (75 BTU/hr)

Airflow

The printer uses two fans to cool its internal parts. Be sure that you do not block the air vents. Lack of correct cooling and ventilation can cause printer failures and improper operation.

Declaration of Product Noise Emission Values

The following tables show the noise emission values 4247 Model Z03.

Table 30. Sound emission levels in the Fast Draft Print Mode

Sound Emission Category	Operating	Idling
LWAd (1 bel = 10 decibels)	7.4 bels	5.1 bels
<LpA>m (bystander positions)	59.7 decibels	36 decibels

Notes:

1. LWAd is the declared sound power emission level for a production series of machines.
2. <LpA>m is the mean value of the space-averaged sound pressure emission levels at the one-meter position.
3. The principle printer configuration used to measure the noise emission levels was:
 - Fast Draft Print Quality mode
 - Table top operation
 - Without Quiet mode

All measurements are made in accordance with the American National Standards Institute (ANSI) S12.10 and reported in conformance with the International Organization for Standardization (ISO) 9296.

The Parallel Interface

The 4247 Model Z03 supports the Parallel Printer Interface. A single, 36-pin connector is mounted on the adapter card.

Attach the PC-parallel interface to the host by using one of the following cables:

- Standard PC parallel printer cable, up to 1.8 m (6 ft) in length
- 1284 Bidirectional parallel printer cable, up to 4.57 m (15 ft) in length

Parallel connector pin assignments

Pin Number	Signal Name	Description
1	-STROBE	Strobe
2 - 9	DATA	Eight Data Lines
10	-ACKNLG	Acknowledge
11	BUSY	Busy
12	PE	Out of Paper
13	SLCT	Printer Selected
14	-AUTO FEED XT	Automatic Line Feed on EOL
15	Unused	
16	LOGIC GND	Logic Ground
17	CHASSIS GROUND	Chassis Ground
18	+ 5VDC	External Power
19 - 30	GROUND	Ground
31	-INIT	Initialize Printer
32	-ERROR	Printer Error
33	GROUND	Ground
34, 35	Unused	
36	-SLCT IN	Make printer selected

The Serial Interface

The 4247 Model Z03 attaches to a host or controller with the RS-232C serial interface. A single, 9-pin D-connector mounted directly on the adapter card allows attachment to the interface.

The RS-232C interface uses a standard serial cable up to 15.2 m (50 ft) in length, with transmission rates up to 19.2 Kbps.

RS-232C connector pin assignments

Table 31 lists the RS232/C serial interface signals:

Table 31. RS232/C serial interface signals

Signal Name	Pin Number	Local Connect. Source	Remote Connect. Source	Description
SIGNAL GROUND	5	–	–	Always connected to the 0 Volts of the Power Supply
TXD	3	Printer	Printer	Transmitted Data Signal (an output from printer). A MARK condition is held during IDLE communication state. An indeterminate state is present when printer is powered off.
RXD	2	Host	Data Set	Received data signal (an input to printer).
RTS	7	Printer	Printer	Request to Send Signal (an output from printer). Active HIGH level signal. It is HIGH until the printer is powered off, then an indeterminate state is present .
CTS	8		Data Set	Active HIGH level signal indicates that the host or data set is ready to receive data from the printer.
DSR	6		Data Set	Active HIGH level signal. Indicates that the host or data set is ready to be connected to the printer and is ready for data transfer.
DCD	1		Data Set	Active HIGH level signal. Indicates that the host is transmitting or the data set is receiving the Data Carrier signal.
2nd RTS	9	Printer		Functionally equivalent to the DTR signal.
DTR	4	Printer	Printer	Data Terminal Ready. Normally HIGH (ON). Indicates that the printer is ready to initiate a connection.

The LAN Interface

LAN Interface Port

1. Ethernet 10/100BaseT Connector
2. Green 10/100Mbit/sec. Transmission Speed LED
3. Yellow Traffic LED

LED Indicators

The LED indicator modes are described in the following table:

LED	Status	Description
Yellow LED	Unlit	Transmission speed at 10Mbit/sec.
	Lit	Transmission speed at 100Mbit/sec.
Green LED	Blinks	Transmitting or receiving packets from the network.

Environmental requirements

The printer operates correctly in environments that are typical of most business offices.

Attention: Damage to the printer can occur if you turn on the printer immediately after the printer has been moved from an environment that does not meet the following operating requirements. If the printer has been in such a location, be sure that you move the printer to the correct operating environment at least 24 hours before you turn on the printer.

Operating environment

The following table shows the operating environment requirements for the printer.

Environment	Requirement
Temperature range	10° to 40° C (50° to 104°F)
Relative humidity range	10% to 90% RH (non-condensing)

Note: The best conditions for feeding and stacking are within a temperature range of 15.6 to 32.2°C (60 to 90°F) and a relative humidity range of 26 to 62%.

Shipping environment

The following table shows the shipping environment requirements for the printer.

Note: You must cover the printer with a plastic cover for shipping.

Environment	Requirement
Temperature range	-35° to 65°C (-31° to 149°F)
Relative humidity range	5% to 95% RH (non-condensing)

Storage environment

The following table shows the storage environment requirements for the printer.

Environment	Requirement
Temperature range	-35° to 65°C (-31° to 149°F)
Relative humidity range	5% to 95% RH (non-condensing)

Note: Ribbon performance and print quality may degrade when exposed to temperatures in excess of 41°C (105°F) for an extended period of time.

Electrical requirements

Use the following tables to plan your site power requirements. The tables list the voltage inputs, grounding, plugs, and receptacles necessary for your new printer. All voltages are single-phase.

Nominal Operation Voltages

Countries	100 V to 127 V 50 or 60 Hz	200 V to 240 V 50 or 60 Hz
United States, Canada	X	
Central and South American, and Far Eastern	X	X
European, Middle Eastern, and African	Saudi Arabia, only	X

Power cord



DANGER

<1-11> Your country may require an approved power cord and plug. Ensure that you have the correct power cord and plug. Use this cord and plug only with an approved, correctly-installed power receptacle.



DANGER

DANGER<1-1> Do not use an extension power-cord.

Place the printer so the power cord can plug into the power receptacle without putting stress on the power cord. The standard power cord length in the U.S. and in all other countries is 2.74 m (9 ft). A 1.83 m (6 ft) power cord is also available in the U.S.

Safety

Safety is a major consideration in the design and manufacture of this product. Proper electrical grounding is essential for safety and for reliable operation of the printer. If you have any questions about the grounding of your receptacle, ask your electrician.

Branch circuits and grounding

A machine must be properly grounded. It is recommended that an insulated green-wire ground, the same size as the phase wire, be installed between the branch circuit panel and the receptacle.

For personal safety, the ground should have sufficiently low impedance to limit the voltage to ground and to facilitate the operation of circuit protective devices in the circuit. For example, the ground path must not exceed 1 ohm for 120-volt, 20-ampere branch circuit devices.

DANGER



<1-30> The construction of this printer provides extra protection against the risk of electrical shock by grounding appropriate metal parts. The extra protection may not function unless the power cord is connected to a properly-grounded outlet. This printer has a grounding-type (3-wire) power cord because grounding is necessary. It is the responsibility of the customer to the person installing the printer to connect it to a properly-grounded outlet. Seek professional assistance before using an adapter or extension cord; such a device could interrupt the grounding circuit. If this printer is connected to an outlet that has been incorrectly connected to the building wiring, serious electric shock could result.

Appendix B. 4247 Model Z03 - Configuration Menu

Parameter	Value	Default
Configuration Storage		
Save Current Values	Custom Set A to H	----
Recall Custom Set Values	Custom Set A to H	----
Power-On Custom Set	Last Used, Custom Set A to H	[Last Used]
Power-On Paper Source	Last Used, Front, Rear	[Front]
Recall Factory Defaults	Yes	----
Attachment	Hot Port Switch, Parallel, Serial (1), USB (2), LAN ASCII (3), LAN IPDS (4)	[Hot Port Switch]
IPDS Configuration (4)		
Characters Per Inch	10, 12, 15, 16.7	[10]
Lines Per Inch	6, 8	[6]
Maximum Print Position	001 to 227	[132]
Maximum Page Length	001 to 880	[066]
Print Quality	Fast Draft Quality, DP Quality, DP Text Quality, Near Letter Quality	[Fast Draft Quality]
Host Fast Draft	Disabled, Enabled	[Enabled]
Print Language	037 to 1149	[500 International 5]
Emulation Mode	4247, 4224, 4230	[4247]
Media Size Priority	Standard, Alternate	[Alternate]
Bar Code Mode	High, Low, Computer Selected	[High]
Graphics Mode	High, Low, Computer Selected	[High]
Alarm Control	Disabled, Enabled	[Enabled]
ASCII Configuration		
Characters Per Inch	10, 12, 15, 16.7, 17.1, 20	[10]
Lines Per Inch	6, 8	[6]
Maximum Print Position	001 to 272	[136]
Maximum Page Length	001 to 880	[066]
Perforation Skipping	000 to 879	[000]
Emulation Mode	4247, 2381 Personal Printer, 4202 ProPrinter III XL, Epson-FX	[4247]
Print Language	000 to 1251	[437 PC] ¹ [0 USA] ²
Print Quality	Fast Draft Quality, DP Quality, DP Text Quality, Near Letter Quality, Courier, Gothic, OCR-A, OCR-B	[Fast Draft Quality]
Host Fast Draft	Disabled, Enabled	[Enabled]
NLQ Typeface	Courier, Gothic	[Courier]
Character Set	PC1, PC2, Italics	[PC1]
Printer Compatibility		
3 (Auto LF on CR)	Disabled, Enabled	[Disabled]
4 (Auto CR on LF)	Disabled, Enabled	[Disabled]
5 (FF Suppression)	Disabled, Enabled	[Disabled]
6 (Init)	Disabled, Enabled	[Enabled]
7 (Condensed Print)	15 CPI, 16.7 CPI, 17.1 CPI	[17.1 CPI]
8 (Slashed Zero)	Disabled, Enabled	[Disabled]
9 (20 CPI)	Disabled, Enabled	[Enabled]
Alarm Control	Disabled, Enabled	[Enabled]
Override Host		
Paper Source	Disabled, Enabled	[Disabled]
Characters Per Inch	Disabled, Enabled	[Disabled]
Lines Per Inch	Disabled, Enabled	[Disabled]
Maximum Page Length	Disabled, Enabled	[Disabled]
Parallel Interface		
Interface Type	PC Parallel, 1284 Parallel	[PC Parallel]
Input Buffer Size	256, 2K, 12K, 32K, 64K, 128K	[32K]
Select-In	Disabled, Enabled	[Enabled]
AutoFeed-XT	Disabled, Enabled	[Disabled]
Serial Interface (1)		
Interface Type	RS-232C	[RS-232C]
Input Buffer Size	256, 2K, 12K, 32K, 64K, 128K	[32K]

1. [437 PC] when the emulation is 4247, 2381 Personal Printer, 4240 ProPrinter III XL.

2. [0 USA] when the emulation is Epson-FX.

Parameter	Value	Default
Data Bits	7, 8	[8]
Baud Rate	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 115200	[9600]
Parity	None, Odd, Even, Mark, Space	[None]
Pacing Control	DTR, XON/XOFF	[DTR]
Connection Type	Local, Remote	[Local]
LAN Interface (3)(4)		
IP Address Assignment	Fixed, DHCP	[Fixed]
IP Address	E.g. 127.000.000.000	[127.000.000.000]
Subnet Mask	E.g. 255.255.254.000	[255.255.254.000]
Default Gateway	E.g. 000.000.000.000	[000.000.000.000]
Host Name	A string of max. 14 characters	[4247_xxxxxx]
Workgroup Name	A string of max. 14 characters	[workgroup]
SMTP Service	Disabled, Enabled	[Disabled]
Mail Server Address	E.g. 000.000.000.000	[000.000.000.000]
E-mail Address (Receiver)	A string of max. 48 characters	[null string]
E-mail Address (Sender)	A string of max. 48 characters	[null string]

- (1) If serial attachment is installed.
- (2) If USB attachment is installed.
- (3) If LAN ASCII attachment is installed.
- (4) If LAN ASCII/IPDS attachment is installed.

Printer Setup		
Paper Source	Front, Rear	[Front]
Front Forms Backup	Disabled, Enabled	[Enabled]
Rear Forms Backup	Disabled, Enabled	[Enabled]
Continuous Forms Linking	Disabled, Enabled	[Disabled]
Form Feed Mode	Not Active in Ready State, Active in Ready State	[Not Active in Ready State]
Automatic Eject	Disabled, Enabled	[Disabled]
Automatic Restore	Disabled, Data, Timer nn Seconds (nn = 10, 20, 30, 40, 50)	[Disabled]
Continuous Forms Eject Mode	Immediate Eject, Delayed Eject	[Immediate Eject]
Bar Code Print Direction	Unidirectional, Bidirectional	[Bidirectional]
Graphics Print Direction	Unidirectional, Bidirectional	[Bidirectional]
Perforation Safety	Disabled, Enabled	[Disabled]
Jam Sensors	Disabled, Enabled	[Enabled]
Printer Adjustments		
Front AFTA	-5, -4, -3, -2, -1, 0, +1, +2, +3, Fixed 1, Fixed 1.5, Fixed 2, Fixed 2.5, Fixed 3, Fixed 3.5, Fixed 4, Fixed 4.5, Fixed 5, Fixed 5.5, Fixed 6, Fixed 6.5, Fixed 7, Fixed 7.5, Fixed 8	[0]
Front Tear Position	-390 to +30	[0]
Front Left Margin Alignment	0 to 60	[0]
Front Paper Load Position	-30 to +360	[0]
Rear AFTA	-5, -4, -3, -2, -1, 0, +1, +2, +3, Fixed 1, Fixed 1.5, Fixed 2, Fixed 2.5, Fixed 3, Fixed 3.5, Fixed 4, Fixed 4.5, Fixed 5, Fixed 5.5, Fixed 6, Fixed 6.5, Fixed 7, Fixed 7.5, Fixed 8	[0]
Rear Tear Position	-390 to +30	[0]
Rear Left Margin Alignment	0 to 60	[0]
Rear Paper Load Position	-30 to +360	[0]
Power On Reset	Yes	----
Display Language	000 English, 001 Deutsch, 002 Français, 003 Italiano, 004 Español, 005 Nederlands, 006 Dansk, 007 Português, 008 Norsk, 009 Svenska, 010 Suomi, 011 Polski	[000 English]
Vital Product Data		
Serial Number	0000000	[0000000]
Device Specific Information	0000000000000000	[0000000000000000]
Quiet Print	No, Yes	NO
Hex Print	No, Yes	NO
Quit from Menu	Restore Previous Values	----

Appendix C. Printer driver support

IBM pSeries AIX colon files

The 4247 printer is supported on AIX 4.1 and later using files that can be found and downloaded from our website. When installed, users can add a 4247 printer device with virtual printers under three emulation modes: IBM 2381, IBM Proprinter III XL, and Epson FX. The virtual printers provide automatic emulation mode switching to support multiple data streams on a single printer.

IBM System i workstation customization objects

To help you get started in attaching your printer to IBM System i systems. Printer Profile source files for creating Workstation Customization Objects (WSCST) for Host Print Transform can be downloaded from the IBM website. For additional information see the *IBM Workstation Customization Programming, SC42-3605* for details on Host Print Transform and the installation of these files on your system. For more information concerning Host Print Transform and the creation of additional workstation customization objects for this printer, refer to the *IBM AS/400 Printer Device Programming, SC42-3713* or *AS/400 Workstation Customization Function Programmer's Guide, SC41-0056*.

Index

Numerics

- 1284 Parallel interface type 92
- 20 CPI, parallel parameter 87
- 2381 Personal Printer emulation, parallel attachment 75
- 4202 Proprinter III XL emulation, parallel attachment 75
- 4224 emulation, IPDS Configuration 65
- 4230 emulation, IPDS Configuration 65

A

- activating Form Feed key 110
- adjusting
 - front automatic forms thickness adjustment 120
 - front left margin alignment 121
 - front paper load position 121
 - front tear position 120
 - rear automatic forms thickness adjustment 122
 - rear left margin alignment 123
 - rear paper load position 124
 - rear tear position 123
- adjusting forms 31
- adjustments, printer 119
- alarm
 - audible 28
 - beeper 28
 - enabling or disabling, IPDS Configuration 68
 - enabling or disabling, parallel 88
- Alarm Control, IPDS Configuration 68
- Alarm Control, parallel parameter 88
- ASCII attachment, configuring 71
- attachment selection, using 57
- attachment, selecting 57
- Attention, status indicator 28
- audible alarm 28
- audible alarm, description 28
- AutoFeed XT, parallel parameter 94
- Automatic Carriage Return on Line Feed, parallel parameter 82
- Automatic Eject, printer setup parameter 112
- automatic forms thickness (front), adjusting 120
- automatic forms thickness (rear), adjusting 122
- Automatic Line Feed on Carriage Return, parallel parameter 81
- Automatic Restore, printer setup parameter 113

B

- backing up front forms 108
- backing up rear forms 108
- Bar Code Mode, IPDS Configuration 67

- Bar Code Print Direction, printer setup parameter 114
- Baud Rate, serial parameter 97
- Bidirectional Adjustment, printer 124
- buffer size, parallel attachment 92
- buffer size, serial attachment 95

C

- CANCEL PRINT, function key 36
- canceling configuration changes 137
- canceling printer adjustments 126
- changing parameter values 38
- Character Set, parallel parameter 80
- Characters Per Inch (CPI), ASCII parameter 71
- Characters Per Inch (CPI), IPDS Configuration 59
- Characters Per Inch, parallel parameter 89
- checking and changing configuration parameters 37
 - configuration categories 40
 - exiting the configuration menu 39
- checking parameter values 38
- clearance, operating and service 170
- Condensed Print, parallel parameter 85
- configuration categories
 - configuration storage 40
 - display language 47, 129
 - parallel configuration 42
 - power on reset 47, 127
 - printer adjustment 46, 119
 - printer setup 45
 - quit from menu 48
 - vital product data 47, 131
- Configuration Menu
 - ASCII Configuration category 71
 - Attachment Selection category 57
 - canceling changes 137
 - categories (summary) 40
 - changing 38, 39
 - Configuration Storage category 49
 - Display Language 129
 - IPDS Configuration 59
 - Power-On Reset 127
 - Printer Adjustments category 119
 - Printer Setup category 107
 - Vital Product Data 131
- Configuration Menu, printout 177
- configuration storage
 - custom sets 49
 - non-custom set 49
 - power-on custom set 52
 - power-on paper source 53
 - recall custom set values 51
 - recall factory defaults 54
 - save current values 50
- configuration values, changing 38
- Connection Type, serial parameter 99

- Continuous Forms Eject Mode, printer setup parameter 114
- Continuous Forms Linking, printer setup parameter 109
- Courier, parallel attachment 78
- Courier, parallel NLQ Typeface 79
- CPI, ASCII parameter 71
- CPI, IPDS Configuration 59
- Custom Set in Use Indicator 29
- custom sets, configuration storage value 49

D

- Data Bits, serial parameter 96
- deactivating Form Feed key 110
- Default Gateway, LAN Interface 102
- defaults (factory), restoring 54
- delayed ejection 114
- demo pages, print 143
- Device Specific Information, changing 132
- dimensions, printer 170
- display language 129
- DP (Data Processing) Quality, IPDS Configuration 62
- DP (Data Processing) Quality, parallel attachment 78
- DP Text Quality, IPDS Configuration 62
- DP Text Quality, parallel attachment 78
- dual push
 - forms specifications 149

E

- E-Mail Address (Receiver), LAN Interface 105
- E-Mail Address (Sender), LAN Interface 106
- ejection, automatic 112
- ejection, delayed 114
- ejection, immediate 114
- electrical requirements
 - branch circuits and grounding 176
 - power cord 175
 - safety 176
- Emulation Mode, IPDS Configuration 65
- Emulation Mode, parallel parameter 75
- ENTER, function key 31
- environmental requirements
 - operating 174
 - shipping 174
 - storage 175
- Epson-FX emulation, parallel attachment 75
- exiting the Configuration Menu 39

F

- factory defaults, restoring 54
- Fast Draft Quality, IPDS
 - Configuration 62
- Form Feed Mode, printer setup
 - parameter 110
- Form Feed Suppression, parallel
 - parameter 83
- FORM FEED, function key 34
- forms (continuous), linking 109
- forms (front), backing up 108
- forms (rear), backing up 108
- forms linking 142
- forms parking 142
- forms thickness (front), adjusting 120
- forms thickness (rear), adjusting 122
- forms, adjusting 31
- Front Automatic Forms Thickness, printer
 - adjustment 120
- Front Forms Backup, printer setup
 - parameter 108
- front forms, backing up 108
- Front Left Margin Alignment, printer
 - adjustment 121
- Front Paper Load Position, printer
 - adjustment 121
- front push
 - configuring printer for 16
 - forms specifications 149
 - LOAD/EJECT key function 33
 - stacking recommendations 150
- Front Tear Position, printer
 - adjustment 120
- function keys 29

G

- getting started 1
 - configuring 16
 - locations 7
 - printing first document 20
 - unpacking 4
- Gothic, parallel attachment 78
- Gothic, parallel NLQ Typeface 79
- Graphics Mode, IPDS Configuration 68
- Graphics Print Direction, printer setup
 - parameter 115

H

- heat output 171
- host form feed 83
- Host Name, LAN Interface 102

I

- immediate ejection 114
- indicator, Custom Set in Use 29
- indicators, status 27
- Init (signal), parallel parameter 84
- Input Buffer Size, parallel parameter 92
- Input Buffer Size, serial parameter 95
- input source, defining 107
- input source, power-on default 53
- Interface Type, parallel parameter 92

- Interface Type, serial parameter 95
- IP Address Assignment, LAN
 - Interface 100
- IP Address, LAN Interface 100
- IPDS configuration
 - alarm control 68
 - bar code mode 67
 - characters per inch 59
 - emulation mode 65
 - graphics mode 68
 - lines per inch 60
 - maximum page length (MPL) 61
 - maximum print position (MPP) 60
 - print language 64
 - print quality 62
- IPDS Configuration 59
- Italic, parallel attachment 80

J

- Jam Sensors, printer setup
 - parameter 116

K

- keys
 - CANCEL PRINT 36
 - ENTER 31
 - FORM FEED 34
 - LINE FEED 33
 - LOAD/EJECT 33
 - MENU 30
 - PARK/PATH 32
 - RETURN 32
 - SCROLL/MICRO 30
 - SET TOP OF FORM 34
 - START 35
 - STOP 35
 - TEST 36

L

- language (print), IPDS Configuration 64
- language (print), parallel attachment 76
- LINE FEED, function key 33
- line feeds, parallel 81, 82
- Lines Per Inch (LPI), IPDS
 - Configuration 60
- Lines Per Inch (LPI), parallel
 - parameter 72
- Lines Per Inch, parallel parameter 90
- linking continuous forms 109
- LOAD/EJECT, function key 33
- loading, automatic 113
- locations
 - components 7
- LPI, IPDS Configuration 60
- LPI, parallel parameter 72

M

- Mail Server Address, LAN Interface 104
- maintenance 152
 - cleaning the printer
 - covers 153

- maintenance (*continued*)
 - cleaning the printer (*continued*)
 - inside 153
 - removing the ribbon cartridge 152
- margin alignment (front left),
 - adjusting 121
- margin alignment (front right),
 - adjusting 123
- Maximum Page Length (MPL), IPDS
 - Configuration 61
- Maximum Page Length (MPL), parallel
 - parameter 74
- Maximum Page Length, parallel
 - parameter 91
- Maximum Print Position (MPP), IPDS
 - Configuration 60
- Maximum Print Position (MPP), parallel
 - parameter 73
- Media Size Priority, IPDS
 - Configuration 66
- MENU, function key 30
- MPL, IPDS Configuration 61
- MPL, parallel parameter 74
- MPP, IPDS Configuration 60
- MPP, parallel parameter 73

N

- Near Letter Quality, IPDS
 - Configuration 62
- Near Letter Quality, parallel
 - attachment 78
- NLQ Typeface, parallel parameter 79
- NLQ, IPDS Configuration 62
- non-custom set, configuration storage
 - value 49

O

- OCR-A, parallel attachment 78
- OCR-B, parallel attachment 78
- operator and service clearance 170
- operator panel
 - audible alarm 28
 - display 28
 - function keys 29
 - status indicators 27
 - understanding 27
- operator panel keys 29
- operator panel language, changing 129
- ordering signal cables 151
- Override Host, parallel parameter 89

P

- Pacing Protocol, serial parameter 98
- page length (MPL), IPDS
 - Configuration 61
- page length (MPL), parallel
 - parameter 74
- paper bail 139
- paper load position (front),
 - adjusting 121
- paper load position (rear), adjusting 124
- paper source 107
- paper source, power-on default 53

Paper Source, printer setup
 parameter 107

parallel configuration
 alarm control 88
 autoseed XT 94
 character set 80
 characters per inch 71
 emulation mode 75
 input buffer size 92
 interface type 92
 lines per inch 72
 maximum page length (MPL) 74
 maximum print position (MPP) 73
 NLQ typeface 79
 print language 76
 print quality (Epson-FX) 78
 print quality (PC parallel) 78
 printer compatibility 81
 select-in signal 93

parallel, attach to 172

parameter values, changing 38

Parity, serial parameter 97

Park/Path, function key 32

parking continuous forms 142

parking the printhead 116

Path, function key 32

PC Parallel interface type 92

PC1 (PC Character Set 1), parallel
 attachment 80

PC2 (PC Character Set 2), parallel
 attachment 80

Perforation Safety, printer setup
 parameter 116

physical specifications 170

power consumption 170

Power-On Custom Set, configuration
 storage value 52

Power-On Paper Source, configuration
 storage value 53

power-on reset (POR) 127

Print Language, IPDS Configuration 64

Print Language, parallel parameter 76

print position (MPP), IPDS
 Configuration 60

print position (MPP), parallel
 parameter 73

Print Quality, IPDS Configuration 62

Print Quality, parallel parameter 78

printer
 airflow 171
 dimensions and clearances 170
 sound levels 171
 specifications 170
 unpacking 4
 weight 170

printer adjustments
 bidirectional adjustment 124
 front forms load position 121
 front forms thickness (AFTA) 120
 front left margin alignment 121
 front tear position 120
 quit from menu 137
 rear automatic forms thickness
 adjustment (AFTA) 122
 rear forms load position 124
 rear left margin 123
 rear tear position 123

printer adjustments (*continued*)
 sensor tune 125

printer attachment, selecting 57

printer compatibility (parallel)
 20 CPI 87
 automatic carriage return on line
 feed 82
 automatic line feed on carriage
 return 81
 condensed print 85
 form feed suppression 83
 Init 84
 slashed zero 86

Printer Compatibility parameters, parallel
 attachment 81

printer setup
 automatic eject 112
 automatic restore 113
 bar code print direction 114
 continuous forms eject mode 114
 continuous forms linking 109
 form feed mode 110
 front forms backup 108
 graphics print direction 115
 jam sensors 116
 paper source 107
 perforation safety 116
 rear forms backup 108

printhead parking 116

printing your first document 20

Processing, status indicator 28

push-pull
 forms specifications 149

Q

quality (print), IPDS Configuration 62

Quick Reference, printing 144

quit from menu 137

R

Ready, status indicator 27

Rear Automatic Forms Thickness, printer
 adjustment 122

Rear Forms Backup, printer setup
 parameter 108

rear forms, backing up 108

Rear Left Margin Alignment, printer
 adjustment 123

Rear Paper Load Position, printer
 adjustment 124

rear pull
 forms specifications 149

rear push
 forms specifications 149
 LOAD/EJECT key function 33
 stacking recommendations 150

Rear Tear Position, printer
 adjustment 123

Recall Custom Set Values, configuration
 storage value 51

Recall Factory Defaults, configuration
 storage value 54

recalling factory defaults 54

restoring factory defaults 54

RETURN 32

RS-232C serial interface type 95

RS-422A serial interface type 95

S

samples, print 143

Save Current Values, configuration
 storage value 50

saving current values in custom sets 50

SCROLL/MICRO \uparrow , function key 30

SCROLL/MICRO \downarrow , function key 30

scrolling 31

Select-In Signal, parallel parameter 93

Sensor Tune, printer adjustment
 parameter 125

sensors (jam), disabling 116

Serial Number, changing 131

Set Top of Form, function key 34
 setup
 configuring 16
 printing first document 20
 unpacking 4

Slashed Zero, parallel parameter 86

SMS-XOH processing, IPDS
 Configuration 66

SMTP Service, LAN Interface 104

sound emission levels 171

specifications
 electrical requirements
 branch circuits and
 grounding 176
 power cord 175
 safety 176
 environmental requirements
 operating 174
 shipping 174
 storage 175
 physical requirements
 airflow 171
 heat output 171
 noise emission values 171
 power consumption 170
 weight 170

START, function key 35

status indicators 27

STOP, function key 35

Subnet Mask, LAN Interface 101

supplies
 forms 149
 ribbon 151

T

tear off information 110

tear position (front), adjusting 120

tear position (rear), adjusting 123

TEST, function key 36

tests, print 143

turning on printer 16

U

unpacking the printer 4

using the operator print tests
 firmware information 146

using the operator print tests *(continued)*

- printer adjustments 146
- printer configuration 144
- printer demonstration 144
- quick reference 144

V

- very important (vital) data 131
- vital product data
 - device specific information 132
 - serial number 131
- Vital Product Data 131

W

- Workgroup Name, LAN Interface 103

X

- XOH-SMS processing, IPDS
 - Configuration 66

Z

- zeroes (slashed), parallel parameter 86

Notices

Thanks for choosing the 4247 printer.

Your printer is a reliable working equipment that will be very useful in your daily job.

Our printers have been designed to be compact and respectful of the work environment. They offer a wide range of features and multiple functions that confirm the high technological level reached by the printers with Compuprint brand.

To maintain these printing performances unchanged in the long run, Compuprint has developed specific consumables for each printer type that assure an excellent operation with high printing quality level reliability.

Compuprint srl recommends to use only its original consumables with original packaging (identified by its holographic label).

In this way, a proper use of the printer at quality level stated in the product characteristics can be assured.

All typical usage problems related to not certified consumables may be avoided, such as an overall quality print level degradation and, often, the reduction of the product life due to the fact that the proper working conditions for the print heads and other printer parts are not assured.

Moreover, Compuprint does not only certify its consumables in terms of working conditions but also carefully controls their compliance with the international standard rules concerning:

- no cancerous materials;
- no flammability of the plastic materials;
- other standards

Compuprint advises the customers not to use products for which the compliance to this safety rules are not warranted. Finally seek your dealer or contact a Compuprint office and be sure that are provided you the original consumables.

FFC Notes

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Properly shielded and grounded cables and connectors must be used in order to meet FCC emission limits. Compuprint is not responsible for any radio or television interference caused by using other than recommended cables and connectors or by unauthorized changes or modifications to this equipment. Unauthorized changes or modifications could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

European Union (EU) Conformity Statement

Compuprint srl declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 2006/95/EC, 2004/108/EC.

Per the applicable requirements of EU directive 98/37/EC (“machines”) sound pressure of the above product (measured according to EN27779) does not exceed 70dBA.

This product has been tested and found to comply with the limits for Class A Information Technology Equipment according to European standard EN 55022. The limits for Class A equipment were derived for commercial and industrial environments to provide reasonable protection against interference with licensed communication devices. Important This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Properly shielded and grounded cables and connectors must be used in order to reduce the potential for causing

interference to radio and TV communications and to other electrical or electronic equipment.

Compuprint srl cannot accept responsibility for any interference caused by using other than recommended cables and connectors.

Industry Canada Compliance Statement

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conform à la norme NMB-003 du Canada.

Statement for CISPR 22 Edition 2 Compliance

Attention: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

User Information according to European Directive 2002/95/EC and 2003/108/EC

This unit must be recycled or discarded according to applicable local and national regulations.



The symbol shown on the left, applied to the product or on its packing, indicates that, at end of life, the product is not to be thrown away, or disposed as unsorted municipal waste, but separately collected.

Compuprint srl encourages owners of information technology (IT) equipment to responsibly recycle their equipment when it is no longer needed.

Customer that needs to dispose this equipment must contact the produce and follow the collection framework available locally for the return, recycling and recovery of WEEE.

Customer participation to the separate collection is important to minimize any potential effects on the environment and human health, due to the potential presence of hazardous substances in the equipment, and aids the reuse and recycle of the materials by which the equipment is made.

Uncorrect disposal of the product by the customer will be punished according to the local regulations and Laws.



MAN10297.00.00

Printed in Italy

